


CURVE data**Verli-Line®**

No. Stages	Eff. Change	MATERIAL	Eff. Change
1	-2	IMP. - C.I.	-1
2	-2	IMP. - NI-RI	-1
3	-1	BOWL - BRZ.	-1
4	0	BOWL - NI-RI	-1


6 BHHC**1750**

R.P.M.

SINGLE STAGE LAB PERFORMANCE WITH STANDARD MATERIALS. EFFICIENCY SHOWN FOR 4 OR MORE STAGES. HORSE POWER SHOWN FOR ONE STAGE BASED ON 4 STAGE EFFICIENCY. CORRECTIONS SHOULD BE MADE FOR STAGES AND MATERIAL.

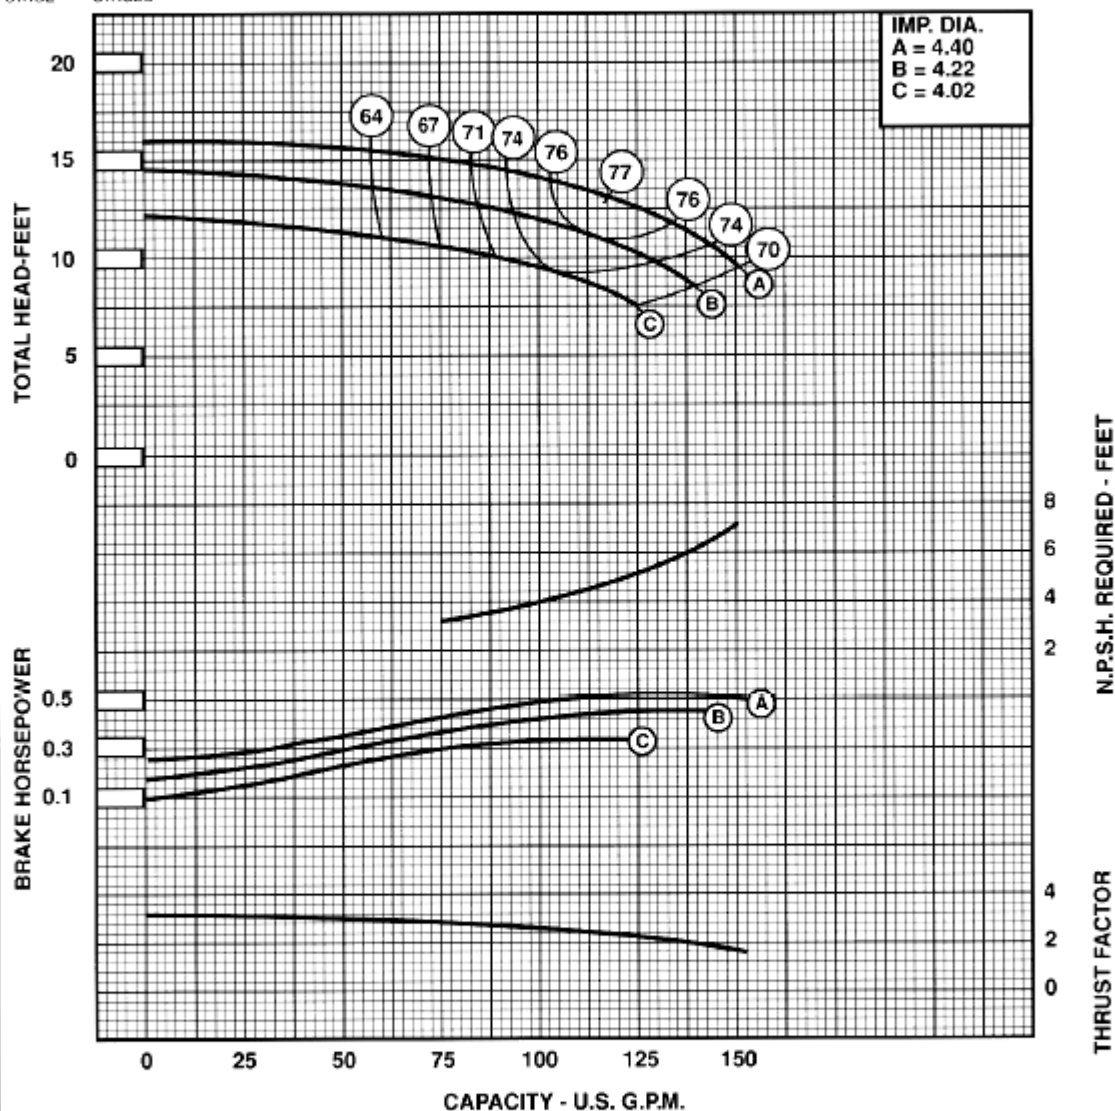ONE ()
STAGE STAGES**PUMP PERFORMANCE**

EYE AREA - SQ. IN.	= 4.32	IMPELLER WT. - LBS.	= 24
WR. PER IMPELLER LB. FT. ²	= 0.03	ONE STAGE WT. - LBS.	= 100
MAX. NO. STD. STAGES	= 30	ADD. STAGE WT. - LBS.	= 25
MAX. OPERATING - PSI	= 530	DISCH. - IN.	= 4
STD. LATERAL - IN.	= 0.50	SUCTION - IN.	= 4
STD. SHAFT DIA. - IN.	= 1.00	BOWL CONN. THREADED - COLLET	
MIN. SUBMERGENCE - IN.	= 14	ADD 4-14" PER ADDITIONAL STAGE.	

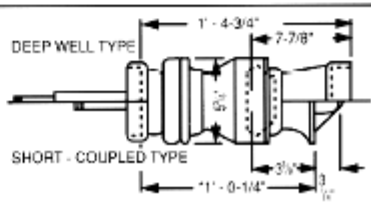

Curves reflect typical performance, refer to factory for certification.