


Verli-Line®

No. Stages	Eff. Change	MATERIAL	Eff. Change
1	-5	IMP. - C.I.	-2
2	-2	IMP. - NI-RI	-1
7	1	BOWL - BRZ.	-1
12	1.5	BOWL - NI-R.	-1


6RH**1750**

R.P.M.

SINGLE STAGE LAB PERFORMANCE WITH STANDARD MATERIALS. EFFICIENCY SHOWN FOR 5 OR MORE STAGES. HORSE POWER SHOWN FOR ONE STAGE BASED ON 5 STAGE EFFICIENCY CORRECTIONS SHOULD BE MADE FOR STAGES AND MATERIAL.

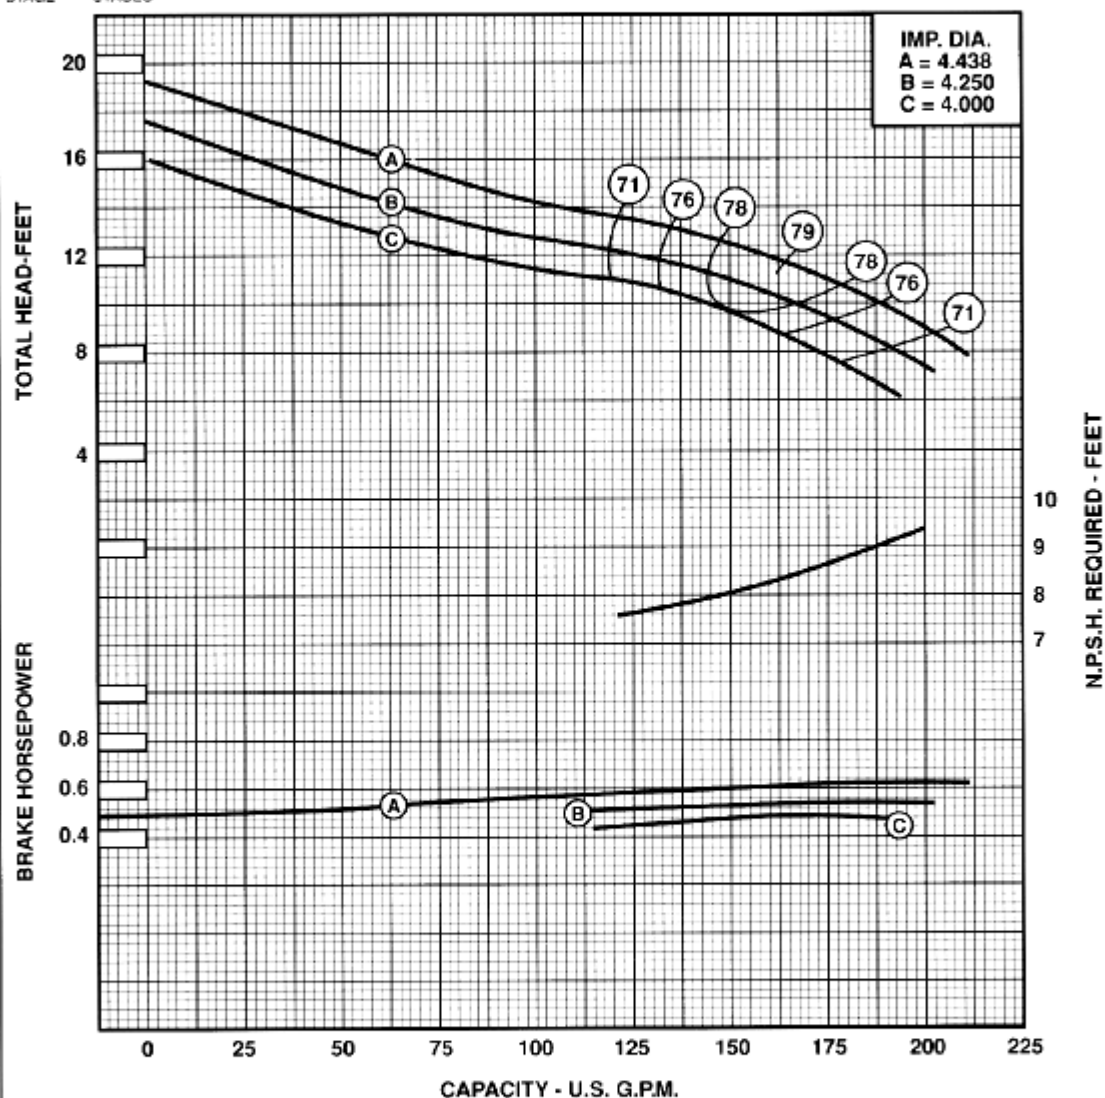ONE
STAGE**PUMP PERFORMANCE**

EYE AREA - SQ. IN.	= 6.79	IMPELLER WT. - LBS.	= 5
WRP PER IMPELLER LB.-FT. ²	= 0.0428	ONE STAGE WT. - LBS.	= 40
MAX. SPHERE SIZE	= -----	ADD'L STAGE WT. - LBS.	= 22
MAX. NO. STD. STAGES	= 25	IMPELLER NUMBER	= -----
MAX. OPERATING - P.S.I.	= 1000	DISCH. - IN.	= 4
STD. LATERAL - IN.	= 0.31	SUCTION - IN.	= 4
STD. SHAFT DIA. - IN.	= 1.00	MAX. LATERAL - IN.	= -----
MAX. SHAFT DIA. - IN.	= -----	BOWL CONN. THREADED - COLLET	
MIN. SUBMERGENCE - IN.	= 13	ADD 5-1/8" PER ADDITIONAL STAGE	

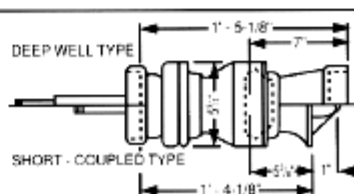

Curves reflect typical performance, refer to factory for certification.

VL1750R/1110