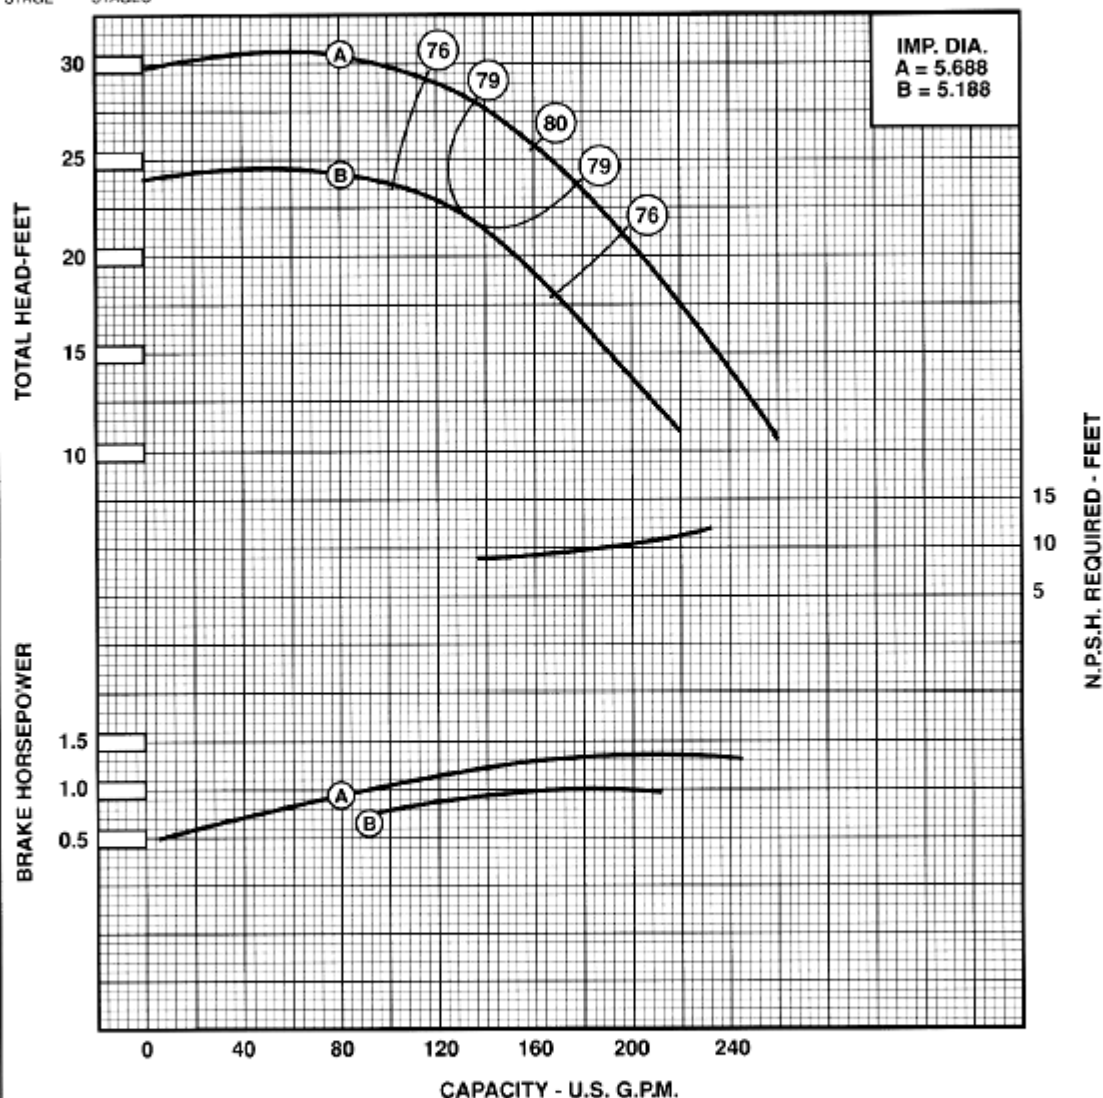


CURVE data**Verli-Line®**


No. Stages	Eff. Change	MATERIAL	Eff. Change
1	-.3	IMP. - C.I.	-.1
2	-.1	IMP. - NI-RI	-.1
4	0	BOWL - BRZ.	0
8	1	BOWL - NI-R.	-.2

8EDM**1750** R.P.M.

SINGLE STAGE LAB PERFORMANCE WITH STANDARD MATERIALS. EFFICIENCY SHOWN FOR 4 OR MORE STAGES. HORSE POWER SHOWN FOR ONE STAGE BASED ON 4 STAGE EFFICIENCY. CORRECTIONS SHOULD BE MADE FOR STAGES AND MATERIAL.

ONE STAGE ()
STAGES**PUMP PERFORMANCE**

EYE AREA - SQ. IN.	= 7.0	IMPELLER WT. - LBS.	= 8
WR PER IMPELLER LB. - FT. ²	= .140	ONE STAGE WT. - LBS.	= 100
MAX. SPHERE SIZE	= -----	ADD'L STAGE WT. - LBS.	= 40
MAX. NO. STD. STAGES	= 45	IMPELLER NUMBER	= -----
MAX. OPERATING - P.S.I.	= 400	DISCH. - IN.	= 5
STD. LATERAL - IN.	= .250	SUCTION - IN.	= 5
STD. SHAFT DIA. - IN.	= 1.3/16	MAX. LATERAL - IN.	= -----
MAX. SHAFT DIA. - IN.	= -----	BOWL CONN. FLANGED - COLLET	
MIN. SUBMERGENCE - IN.	= 13	ADD 5" PER ADDITIONAL STAGE	

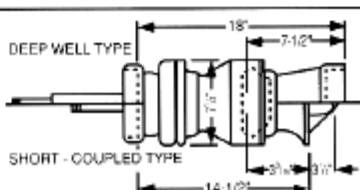

Curves reflect typical performance, refer to factory for certification.

VL175/8EDM1110