


CURVE data**Verli-Line®**

No. Stages	Eff. Change	MATERIAL	Eff. Change
1	-2	IMP. - C.I.	-1
2	-1	IMP. - NI-RI	-1
3	0	BOWL - BRZ.	-2
4	0	BOWL - NI-R.	-2

8RH**1750**


R.P.M.

SINGLE STAGE LAB PERFORMANCE WITH STANDARD MATERIALS. EFFICIENCY SHOWN FOR 3 OR MORE STAGES. HORSE POWER SHOWN FOR ONE STAGE BASED ON 3 STAGE EFFICIENCY. CORRECTIONS SHOULD BE MADE FOR STAGES AND MATERIAL.

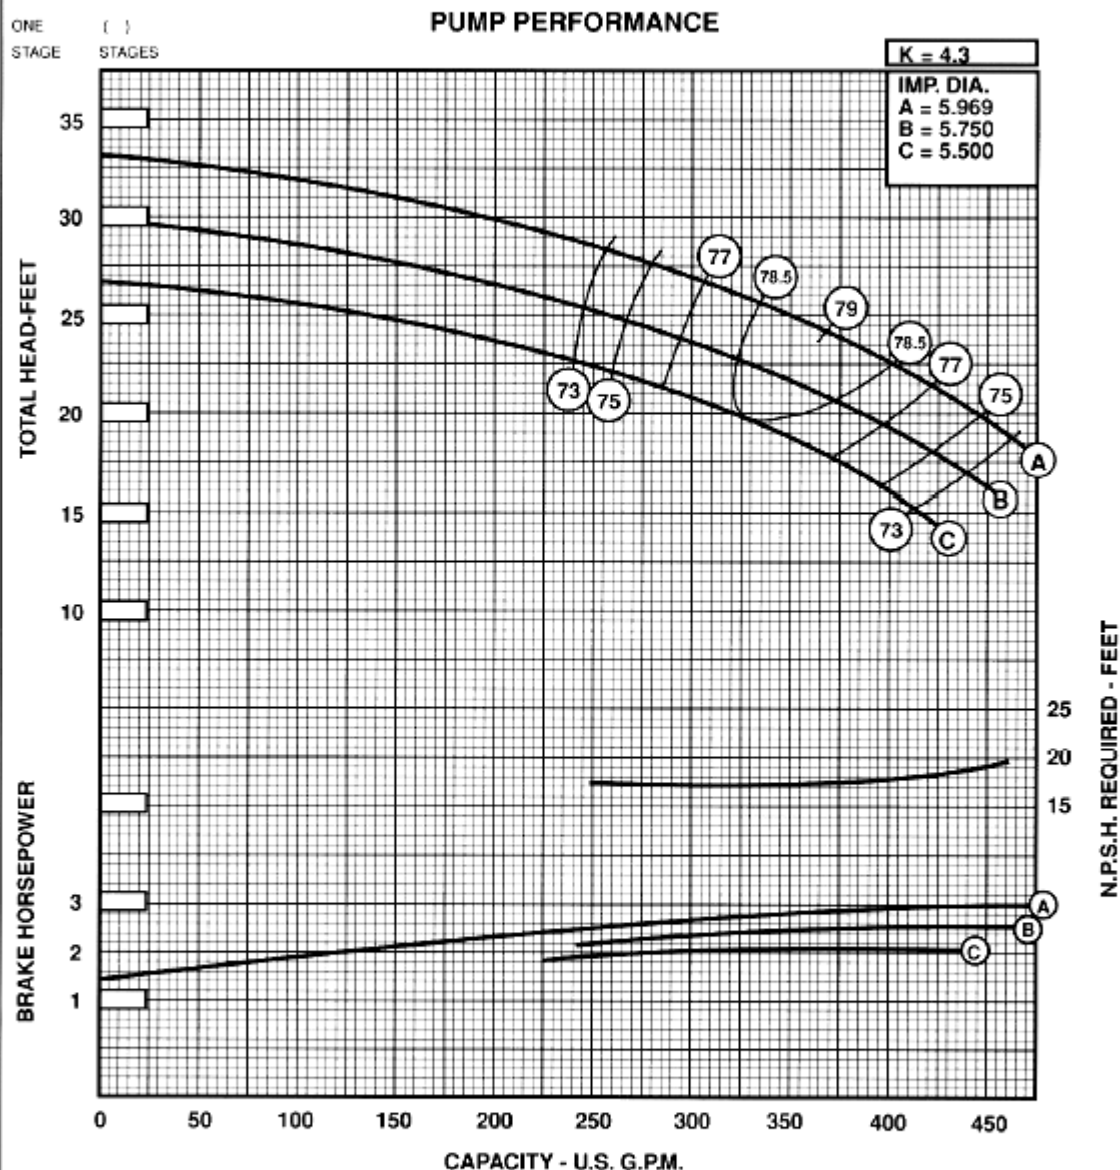

EYE AREA - SQ. IN.	= 10.4
WPI PER IMPELLER LB.-FT. ²	= 0.160
MAX. NO. STD. STAGES	= 26
MAX. OPERATING - P.S.I.	= 400
STD. LATERAL - IN.	= 0.375
STD. SHAFT DIA. - IN.	= 1.188
MAX. SHAFT DIA. - IN.	= —
MIN. SUBMERGENCE - IN.	= 14

IMPELLER WT. - LBS.	= 10
ONE STAGE WT. - LBS.	= 140
ADDL. STAGE WT. - LBS.	= 45
DISCH. - IN.	= 6
SUCTION - IN.	= 5
BOWL CONN. - FLANGED COLLET	
ADD 6.5" PER ADDITIONAL STAGE	

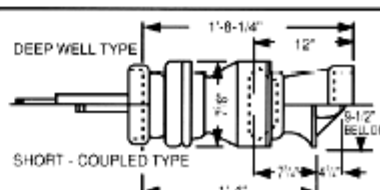

Curves reflect typical performance, refer to factory for certification.