


CURVE data**Verli-Line®**

No. Stages	Eff. Change	MATERIAL	Eff. Change
1	-2	IMP. - C.I.	-1
2	-1	IMP. - NI-RI	-1
5	0	BOWL - BRZ.	-2
		BOWL - NI-R.	-2


8RXL**1750**

R.P.M.

SINGLE STAGE LAB PERFORMANCE WITH STANDARD MATERIALS. EFFICIENCY SHOWN FOR 5 OR MORE STAGES. HORSE POWER SHOWN FOR ONE STAGE BASED ON 5 STAGE EFFICIENCY. CORRECTIONS SHOULD BE MADE FOR STAGES AND MATERIAL.

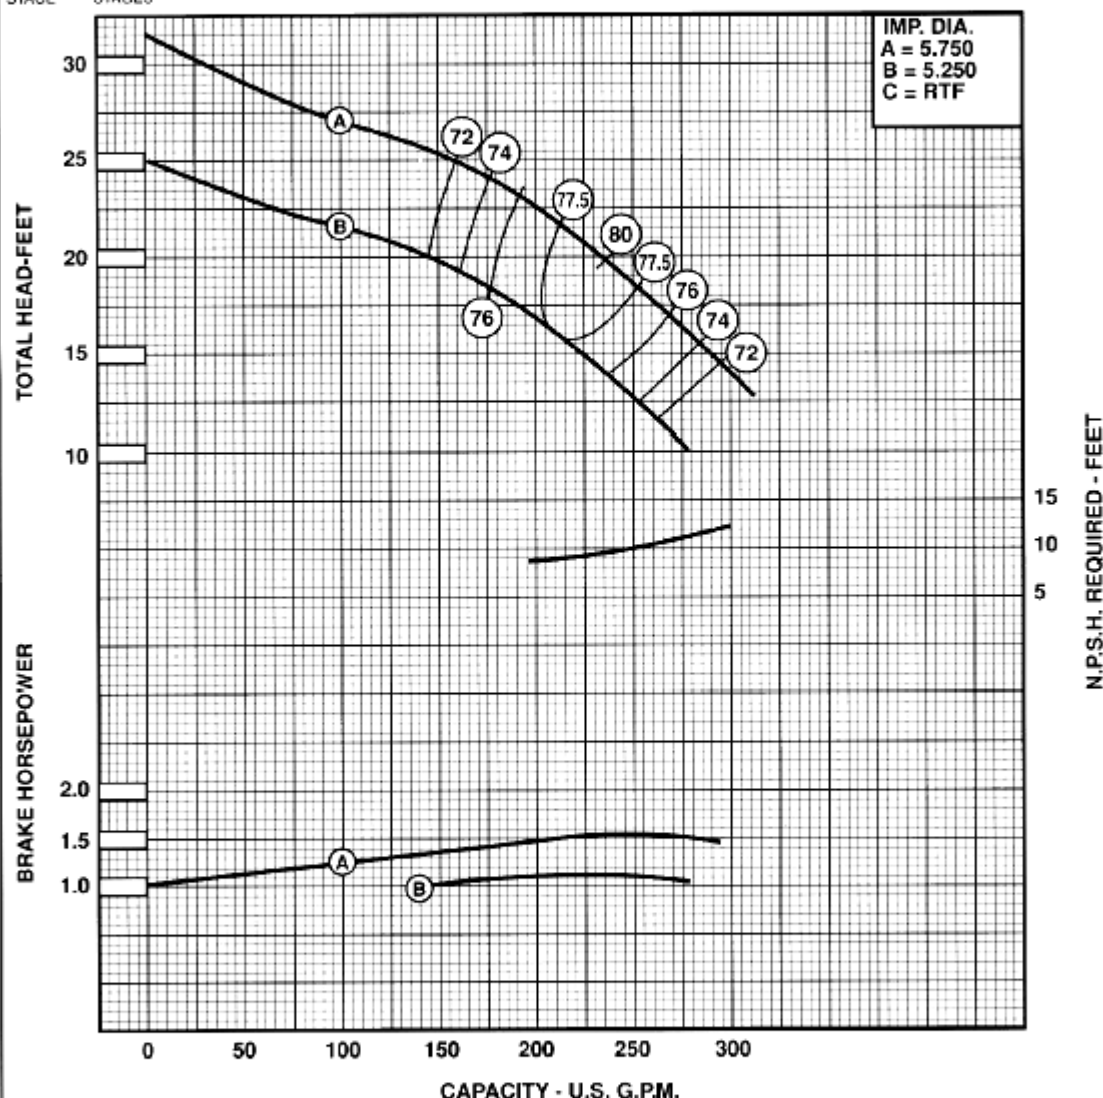ONE
STAGE1
STAGES**PUMP PERFORMANCE**

EYE AREA - SQ. IN.	= 9.5	IMPELLER WT. - LBS.	= 11
WP ² PER IMPELLER LB.-FT. ²	= .160	ONE STAGE WT. - LBS.	= 140
MAX. SPHERE SIZE	= -----	ADD'L STAGE WT. - LBS.	= 45
MAX. NO. STD. STAGES	= 35	IMPELLER NUMBER	= -----
MAX. OPERATING - P.S.I.	= 400	DISCH. - IN.	= 5
STD. LATERAL - IN.	= 375	SUCTION - IN.	= 5
STD. SHAFT DIA. - IN.	= 1-3/16	MAX. LATERAL - IN.	= -----
MAX. SHAFT DIA. - IN.	= -----	BOWL CONN. - FLANGED - COLLET	= -----
MIN. SUBMERGENCE - IN.	= 15	ADD 6-1/2" PER ADDITIONAL STAGE	

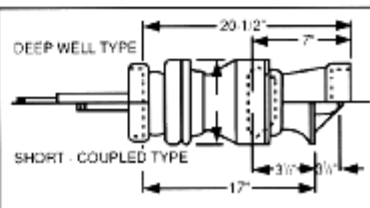

Curves reflect typical performance; refer to factory for certification.

VL17508RXL1110