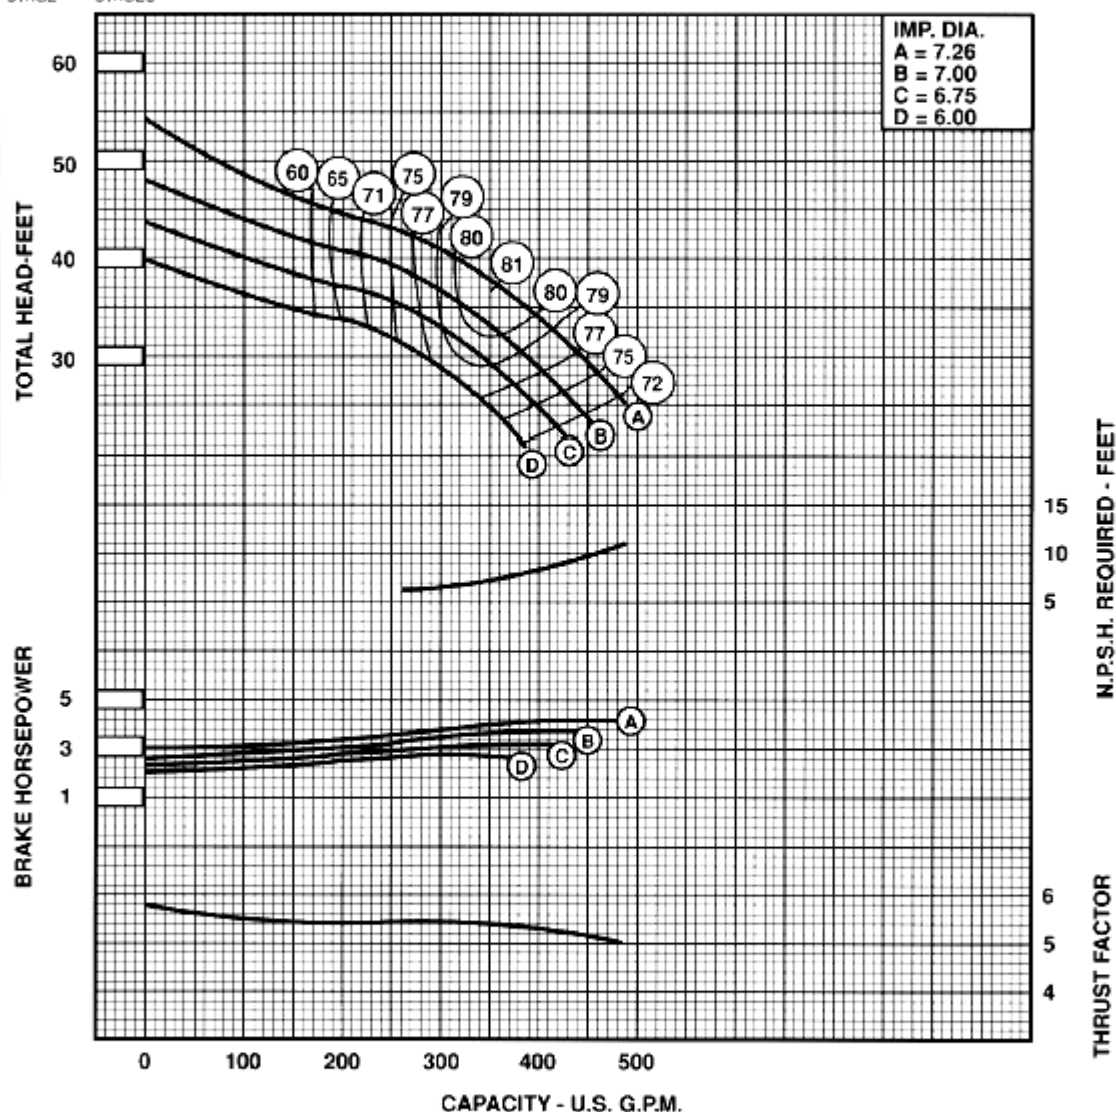


CURVE data**Verli-Line®**


No. Stages	E# Change	MATERIAL	E# Change
1	-4	IMP. - C.I.	-2
2	-2	IMP. - NI-RI	-1
3	-1	BOWL - BRZ.	-2
4	0	BOWL - NI-R.	-1

9 GHL**1750 R.P.M.**

SINGLE STAGE LAB PERFORMANCE WITH STANDARD MATERIALS. EFFICIENCY SHOWN FOR 4 OR MORE STAGES. HORSE POWER SHOWN FOR ONE STAGE BASED ON 4 STAGE EFFICIENCY. CORRECTIONS SHOULD BE MADE FOR STAGES AND MATERIAL.

ONE
STAGE ()
STAGES**PUMP PERFORMANCE**

EYE AREA - SQ. IN.	= 9.57	IMPELLER WT. - LBS.	= 9
WR/PER IMPELLER LB.-FT. ²	= 0.30	ONE STAGE WT. - LBS.	= 135
MAX. NO. STD. STAGES	= 18	ADD'L STAGE WT. - LBS.	= 53
MAX. OPERATING - PSI	= 370	DISCH. - IN.	= 6
STD. LATERAL - IN.	= 0.50	SUCTION - IN.	= 6
STD. SHAFT DIA. - IN.	= 1.503	BOWL CONN. FLANGED - COLLET	
MIN. SUBMERGENCE - IN.	= 22	ADD 8" PER ADDITIONAL STAGE	

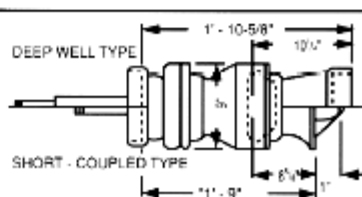

Curves reflect typical performance, refer to factory for certification