


CURVE data**Veri-Line®**

No. Stages	Eff. Change	MATERIAL	Eff. Change
1	-4	IMP. - C.I.	-2
2	-3	IMP. - NI-RI	-1
3	-2	BOWL - BRZ.	-2
4	0	BOWL - NI-RI	-1


9GHM**1760**

R.P.M.

SINGLE STAGE LAB PERFORMANCE WITH STANDARD MATERIALS. EFFICIENCY SHOWN FOR 4 OR MORE STAGES. HORSE POWER SHOWN FOR ONE STAGE BASED ON 4 STAGE EFFICIENCY. CORRECTIONS SHOULD BE MADE FOR STAGES AND MATERIAL.

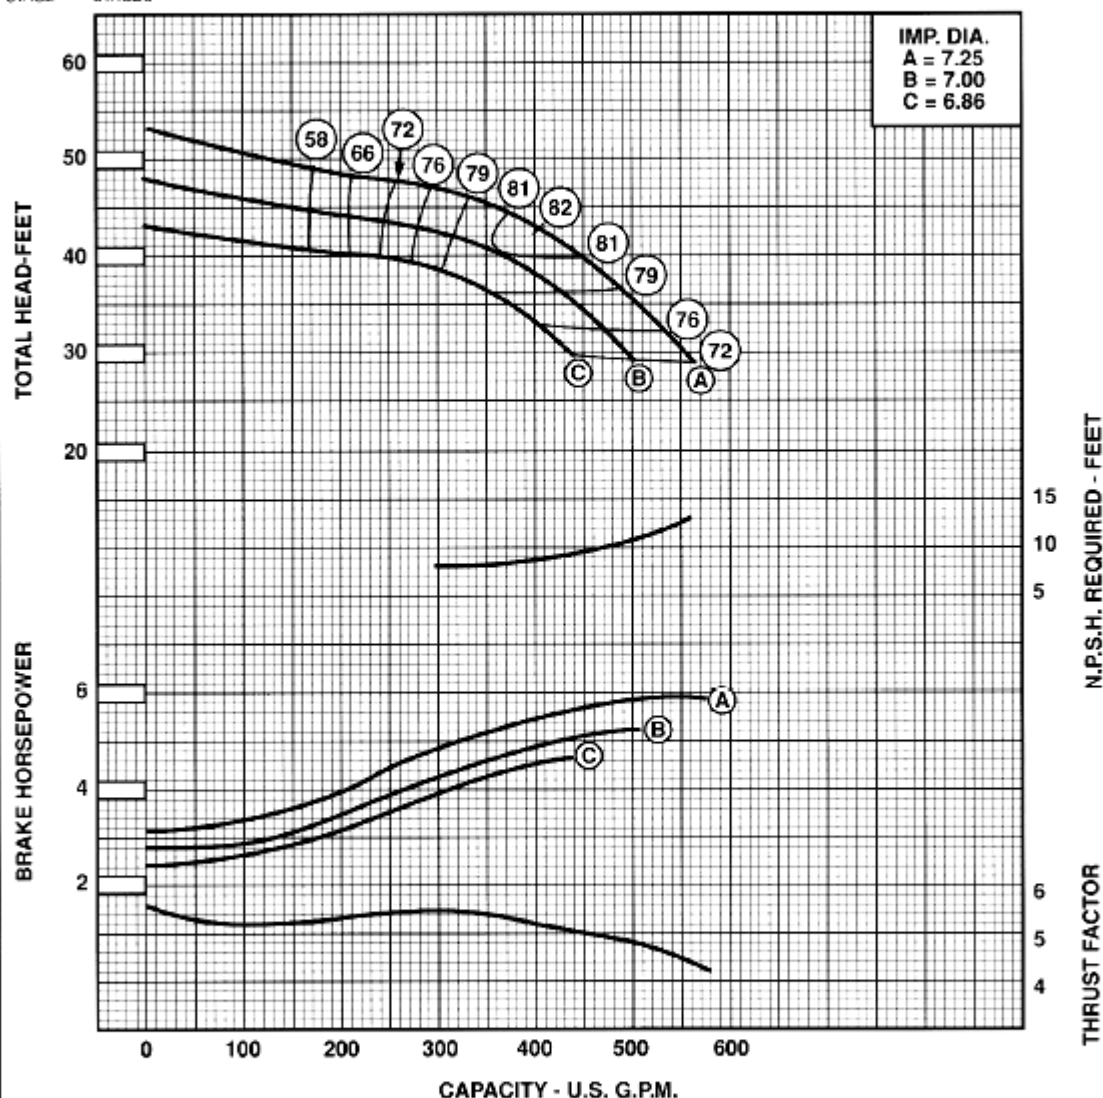ONE
STAGE**PUMP PERFORMANCE**

EYE AREA - SQ. IN.	= 9.57	IMPELLER WT. - LBS.	= 9
WR/ PER IMPELLER LB.-FT. ²	= 0.30	ONE STAGE WT. - LBS.	= 135
MAX. SPHERE SIZE	= -----	ADD'L STAGE WT. - LBS.	= 53
MAX. NO. STD. STAGES	= 18	IMPELLER NUMBER	= -----
MAX. OPERATING - P.S.I.	= 370	DISCH. - IN.	= 6
STD. LATERAL - IN.	= 0.50	SUCTION - IN.	= 6
STD. SHAFT DIA. - IN.	= 1.500	MAX. LATERAL - IN.	= -----
MAX. SHAFT DIA. - IN.	= -----	BOWL CONN. FLANGED - COLLET	
MIN. SUBMERGENCE - IN.	= 22	ADD 8.08" PER ADDITIONAL STAGE	

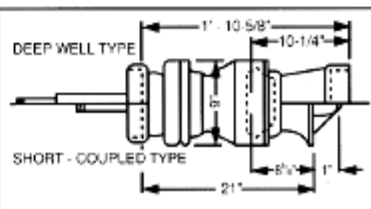

Curves reflect typical performance. refer to factory for certification

VL1760G-M1110