


CURVE data**Verli-Line**

No. Stages	Eff. Change	MATERIAL	Eff. Change
1	-2	IMP. - C.I.	-2
2	-2	IMP. - NI-RI	-1
3	-1	BOWL - BRZ.	0
4	0	BOWL - NI-R.	-1


6 BHLC**3500**

R.P.M.

SINGLE STAGE LAB PERFORMANCE WITH STANDARD MATERIALS. EFFICIENCY SHOWN FOR 4 OR MORE STAGES. HORSE POWER SHOWN FOR ONE STAGE BASED ON 4 STAGE EFFICIENCY CORRECTIONS SHOULD BE MADE FOR STAGES AND MATERIAL.

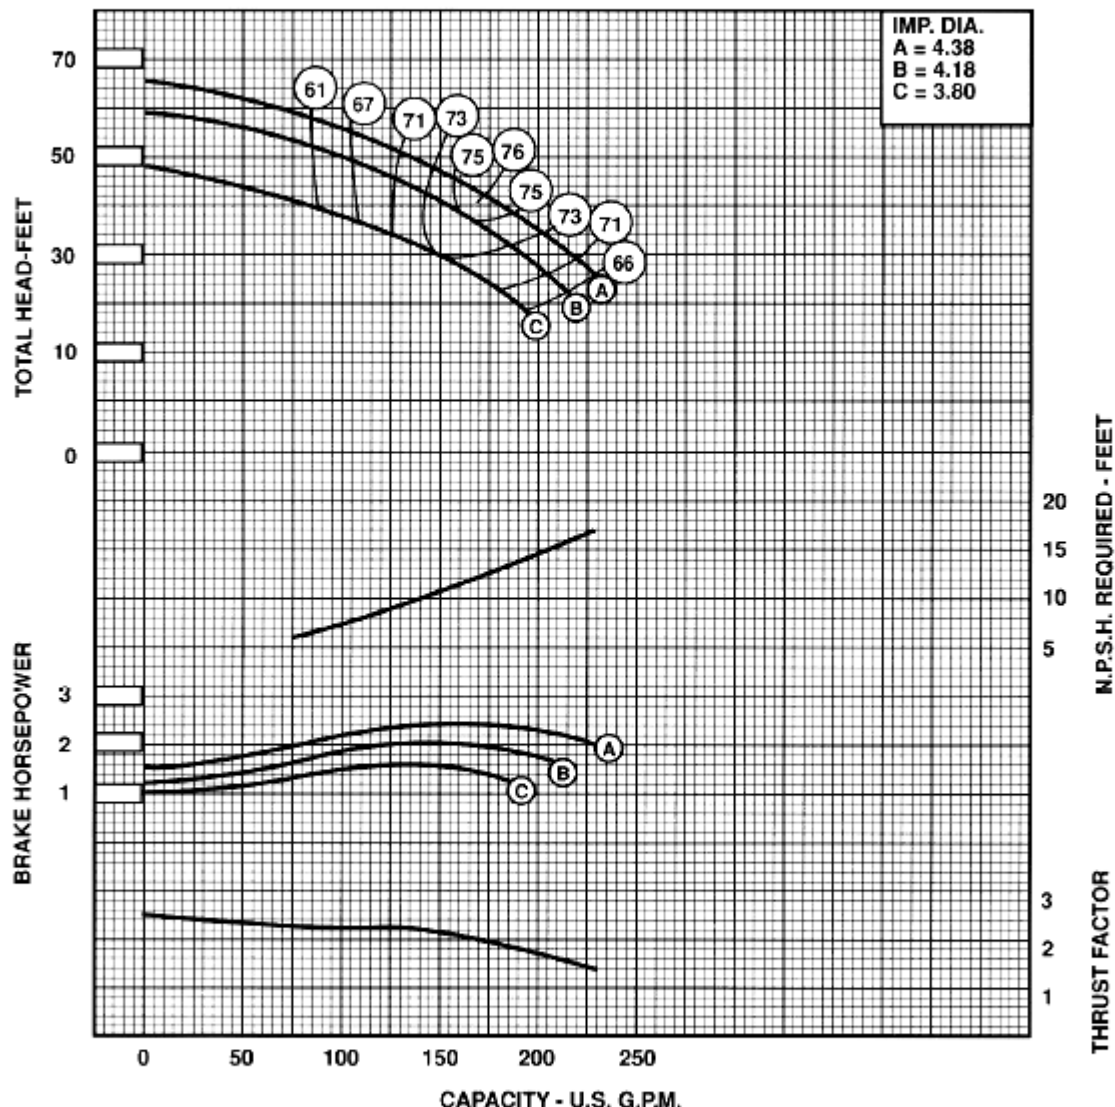ONE
STAGE()
STAGES**PUMP PERFORMANCE**

EYE AREA - SQ. IN.	= 3.88	IMPELLER WT. - LBS.	= 2.8
WR. PER IMPELLER LB.-FT. ²	= 0.03	ONE STAGE WT. - LBS.	= 100
MAX. NO. STD. STAGES	= 17	ADD'L STAGE WT. - LBS.	= 26
MAX. OPERATING - P.S.I.	= 530	DISCH. - IN.	= 4
STD. LATERAL - IN.	= 0.50	SUCTION - IN.	= 4
STD. SHAFT DIA. - IN.	= 1.00	BOWL CONN. THREADED - COLLET	
MIN. SURMERGENCE - IN.	= 21	ADD 4-1/4" PER ADDITIONAL STAGE	

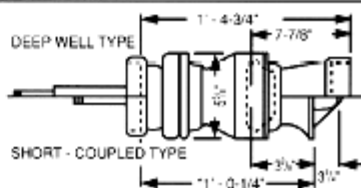

Curves reflect typical performance, refer to factory for certification.