

**CURVE data****Verli-Line®**

| No. Stages | Eff. Change | MATERIAL     | Eff. Change |
|------------|-------------|--------------|-------------|
| 1          | -5          | IMP. - C.I.  | -2          |
| 2          | -2          | IMP. - NI-RI | -1          |
| 7          | 1           | BOWL - BRZ.  | -1          |
| 12         | 1.5         | BOWL - NI-R  | -1          |

**6RH****3500**

R.P.M.


SINGLE STAGE LAB PERFORMANCE WITH STANDARD MATERIALS. EFFICIENCY SHOWN FOR 5 OR MORE STAGES. HORSE POWER SHOWN FOR ONE STAGE BASED ON 5 STAGE EFFICIENCY. CORRECTIONS SHOULD BE MADE FOR STAGES AND MATERIAL.

ONE


( )

STAGE

STAGES

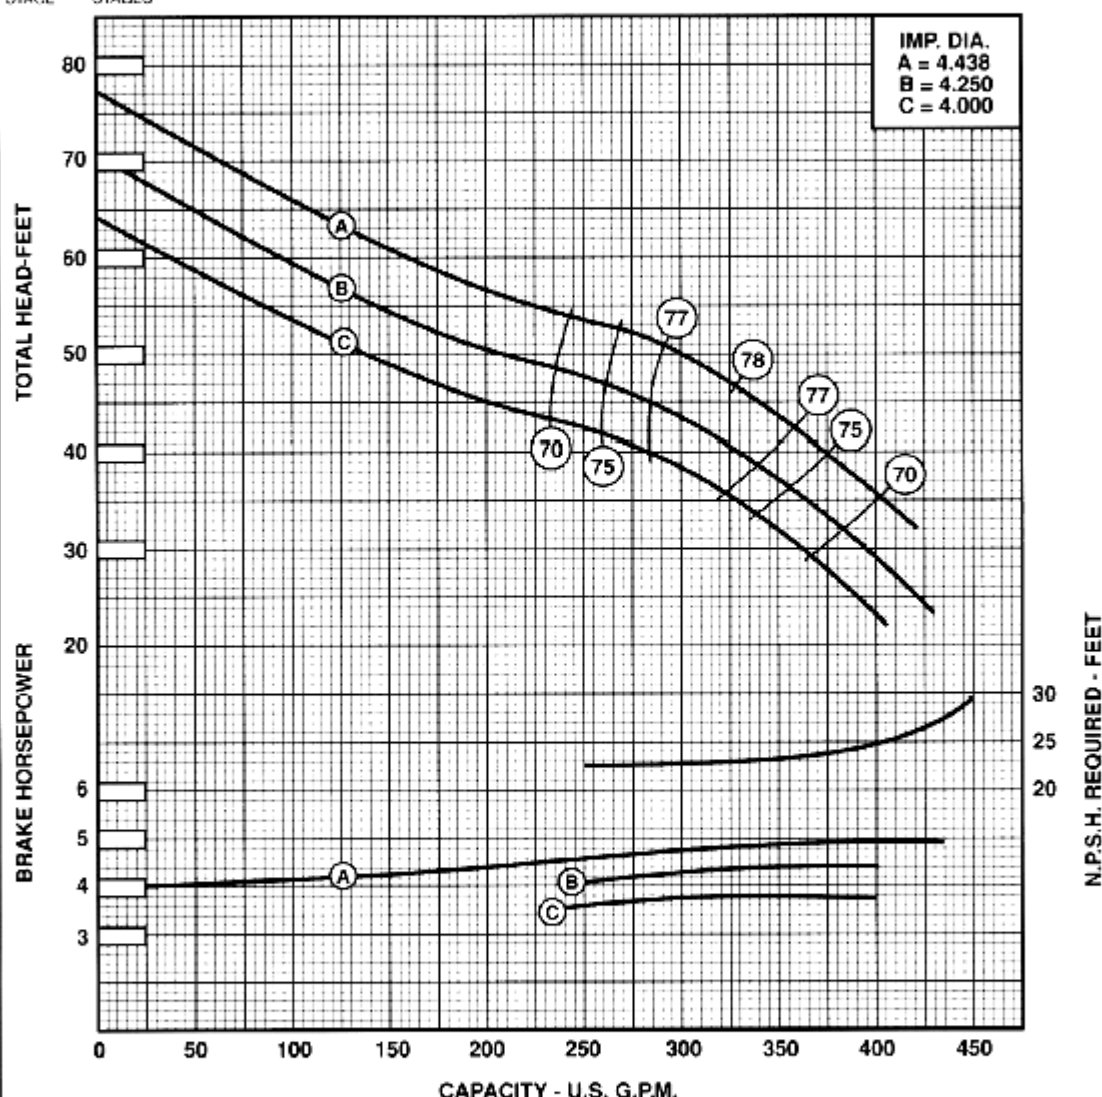**PUMP PERFORMANCE**

|                                        |          |                                 |         |
|----------------------------------------|----------|---------------------------------|---------|
| EYE AREA - SQ. IN.                     | = 6.79   | IMPELLER WT. - LBS.             | = 5     |
| W.P. PER IMPELLER LB.-FT. <sup>2</sup> | = 0.0426 | ONE STAGE WT. - LBS.            | = 40    |
| MAX. SPHERE SIZE                       | = -----  | ADD'L STAGE WT. - LBS.          | = 22    |
| MAX. NO. STD. STAGES                   | = 25     | IMPELLER NUMBER                 | = ----- |
| MAX. OPERATING - P.S.I.                | = 1000   | DISCH. - IN.                    | = 4     |
| STD. LATERAL - IN.                     | = 0.31   | SUCTION - IN.                   | = 4     |
| STD. SHAFT DIA. - IN.                  | = 1.00   | MAX. LATERAL - IN.              | = ----- |
| MAX. SHAFT DIA. - IN.                  | = -----  | BOWL CONN. THREADED - COLLET    |         |
| MIN. SUBMERGENCE - IN.                 | = 13     | ADD 5-1/8" PER ADDITIONAL STAGE |         |

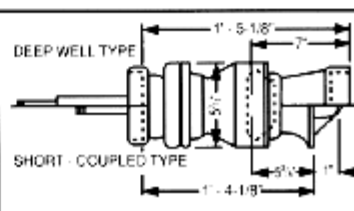

Curves reflect typical performance; refer to factory for confirmation