


CURVE data**Verli-Line®**

No. Stages	Eff. Change	MATERIAL	Eff. Change
1	-6	IMP - C.I.	-1
2	-2	IMP - NI-RI	-1
7	1	BOWL - BRZ.	-1
12	1.5	BOWL - NI-R.	-1


6RM**3500** R.P.M.

SINGLE STAGE LAB PERFORMANCE WITH STANDARD MATERIALS. EFFICIENCY SHOWN FOR 5 OR MORE STAGES HORSE POWER SHOWN FOR ONE STAGE BASED ON 5 STAGE EFFICIENCY. CORRECTIONS SHOULD BE MADE FOR STAGES AND MATERIAL.

ONE STAGE | 1 STAGES

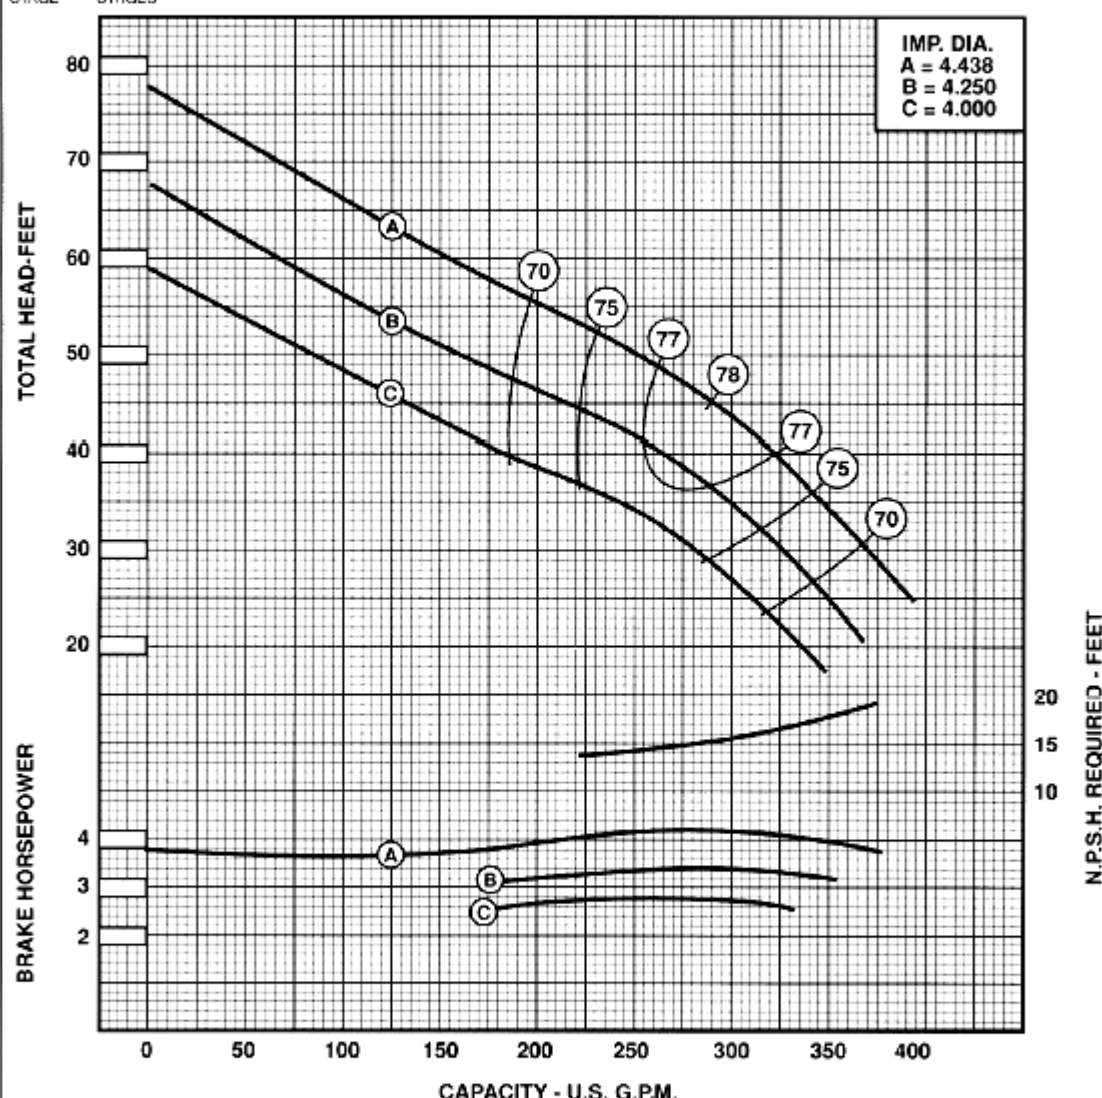PUMP PERFORMANCE

EYE AREA - SQ. IN.	= 6.79	IMPELLER WT. - LBS.	= 5
WHP PER IMPELLER LB.-FT. ²	= .0426	ONE STAGE WT. - LBS.	= 40
MAX. SPHERE SIZE	= -----	ADD'L STAGE WT. - LBS.	= 22
MAX. NO. STD. STAGES	= 30	IMPELLER NUMBER	= -----
MAX. OPERATING - P.S.I.	= 1000	DISCH. - IN.	= 4
STD. LATERAL - IN.	= -----	SUCTION - IN.	= 4
STD. SHAFT DIA. - IN.	= 1	MAX. LATERAL IN.	= -----
MAX. SHAFT DIA. - IN.	= -----	BOWL CONN. THREADED - COLLET	
MIN. SUBMERGENCE - IN.	= 13	ADD 5-1/8" PER ADDITIONAL STAGE.	

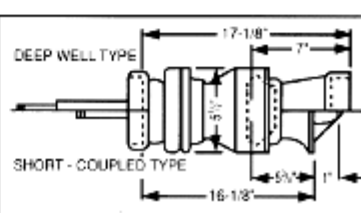

Curves reflect typical performance, refer to factory for certification.

VL3500/6RM/1110