

CURVE data**Verli-Line®**


No. Stages	Eff. Change	MATERIAL	Eff. Change
1	-5	IMP. - C.I.	-2
2	-3	IMP. - NI-RI	-1
6	0	BOWL - BRZ.	0
12	1	BOWL - NI-R.	0

6TH**3500**


R.P.M.

SINGLE STAGE LAB PERFORMANCE WITH STANDARD MATERIALS. EFFICIENCY SHOWN FOR 6 OR MORE STAGES. HORSE POWER SHOWN FOR ONE STAGE BASED ON 6 STAGE EFFICIENCY. CORRECTIONS SHOULD BE MADE FOR STAGES AND MATERIAL.

ONE ()
STAGE STAGES

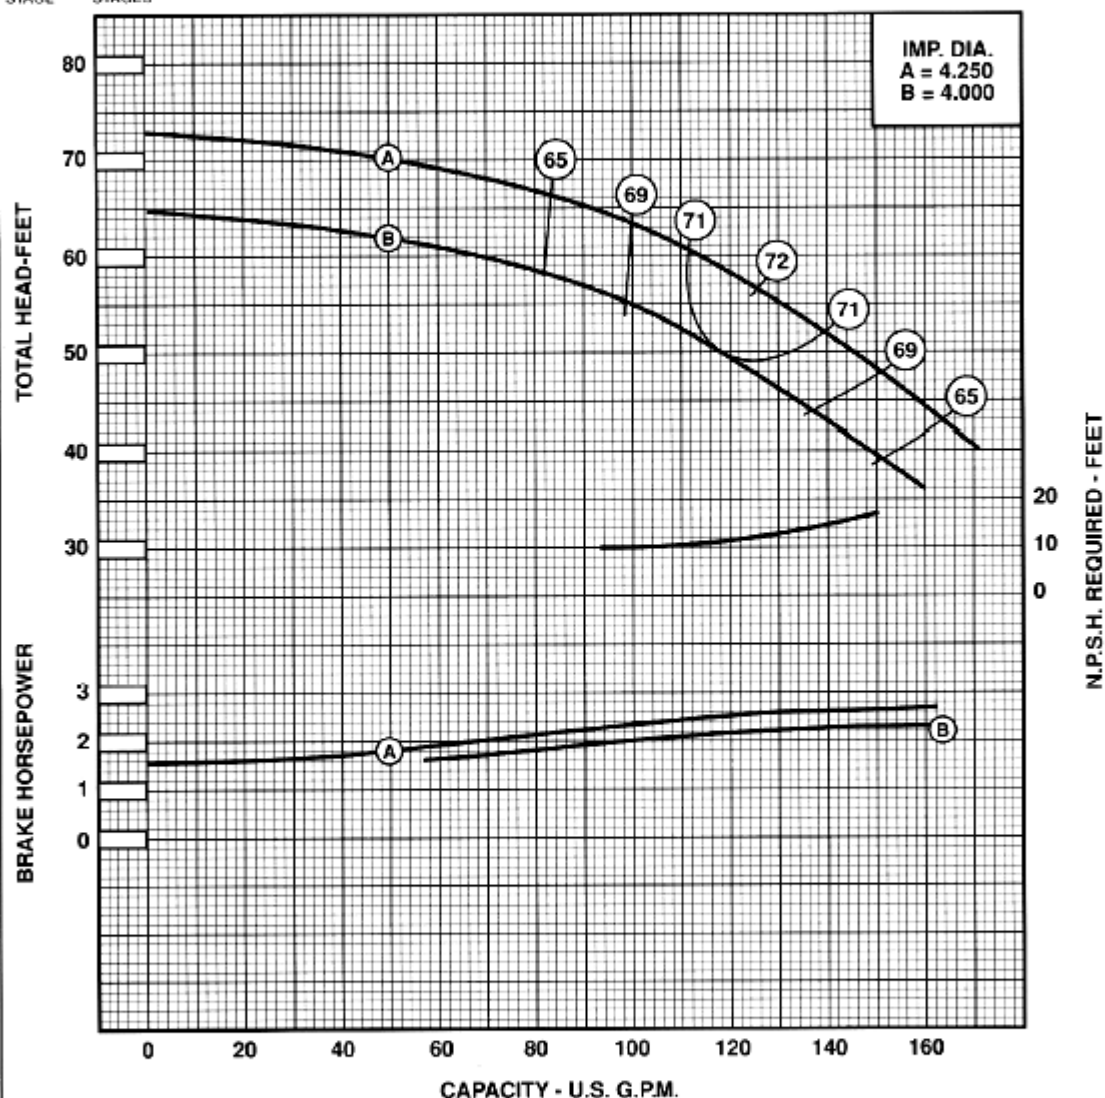PUMP PERFORMANCE

EYE AREA - SQ. IN.	= 3.92	IMPELLER WT. - LBS.	= 6
WR. PER IMPELLER LB.-FT. ²	= 0.03	ONE STAGE WT. - LBS.	= 45
MAX. SPHERE SIZE	= -----	ADD'L STAGE WT. - LBS.	= 18
MAX. NO. STD. STAGES	= 40	IMPELLER NUMBER	= -----
MAX. OPERATING - P.S.I.	= 1000	DISCH. - IN.	= 4
STD. LATERAL - IN.	= 0.22	SUCTION - IN.	= 4
STD. SHAFT DIA. - IN.	= 1.00	MAX. LATERAL - IN.	= -----
MAX. SHAFT DIA. - IN.	= -----	BOWL CONN. THREADED - COLLET	= -----
MIN. SUBMERGENCE - IN.	= 11	ADD 3 1/2" PER ADDITIONAL STAGE.	= -----

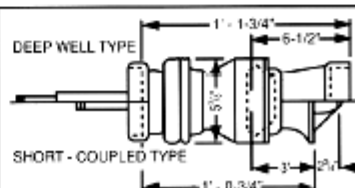

Curves reflect typical performance. refer to factory for certification

VL3500S11110