


CURVE data**Verti-Line®**

No. Stages	Eff. Change	MATERIAL	Eff. Change
1	-4	IMP. - C.I.	-1
2	-2	IMP. - NI-RI	-1
3	-1	BOWL - BRZ.	-2
4	0	BOWL - NI-R.	-2


8FHH**3500**

R.P.M.

SINGLE STAGE LAB PERFORMANCE WITH STANDARD MATERIALS. EFFICIENCY SHOWN FOR 3 OR MORE STAGES. HORSE POWER SHOWN FOR ONE STAGE BASED ON 3 STAGE EFFICIENCY. CORRECTIONS SHOULD BE MADE FOR STAGES AND MATERIAL.

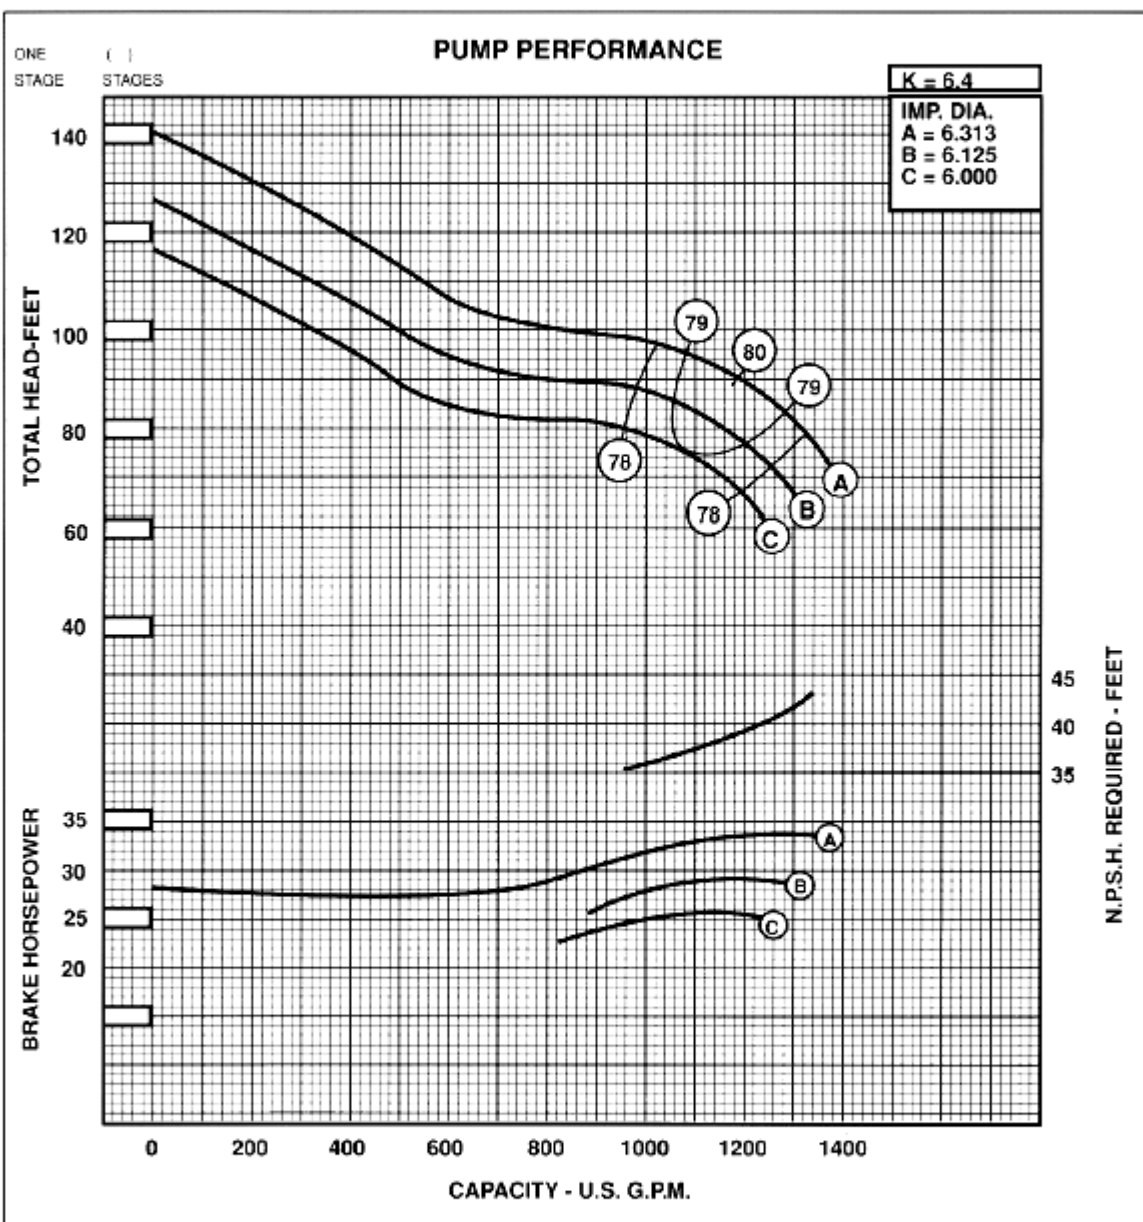

EYE AREA - SQ. IN.	= 17.5	IMPELLER WT. - LBS.	= 10
WR. PER IMPELLER LB.-FT. ²	= 0.240	ONE STAGE WT. - LBS.	= 125
MAX NO. STD. STAGES	= 13	ADDL. STAGE WT. - LBS.	= 50
MAX. OPERATING - P.S.I.	= 800	DISCH. - IN.	= 6
STD. LATERAL - IN.	= 0.440	SUCTION - IN.	= 6
STD. SHAFT DIA. - IN.	= 1.100	BOWL CONN. THREADED-COLLET	
MAX. SHAFT DIA. - IN.	= —	ADD 7.5" PER ADDITIONAL STAGE	
MIN. SUBMERGENCE - IN.	= 21		

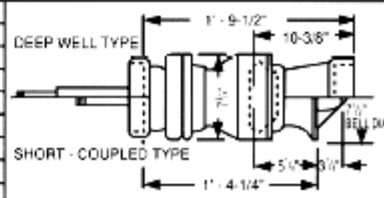

Curves reflect typical performance. refer to factory for certification