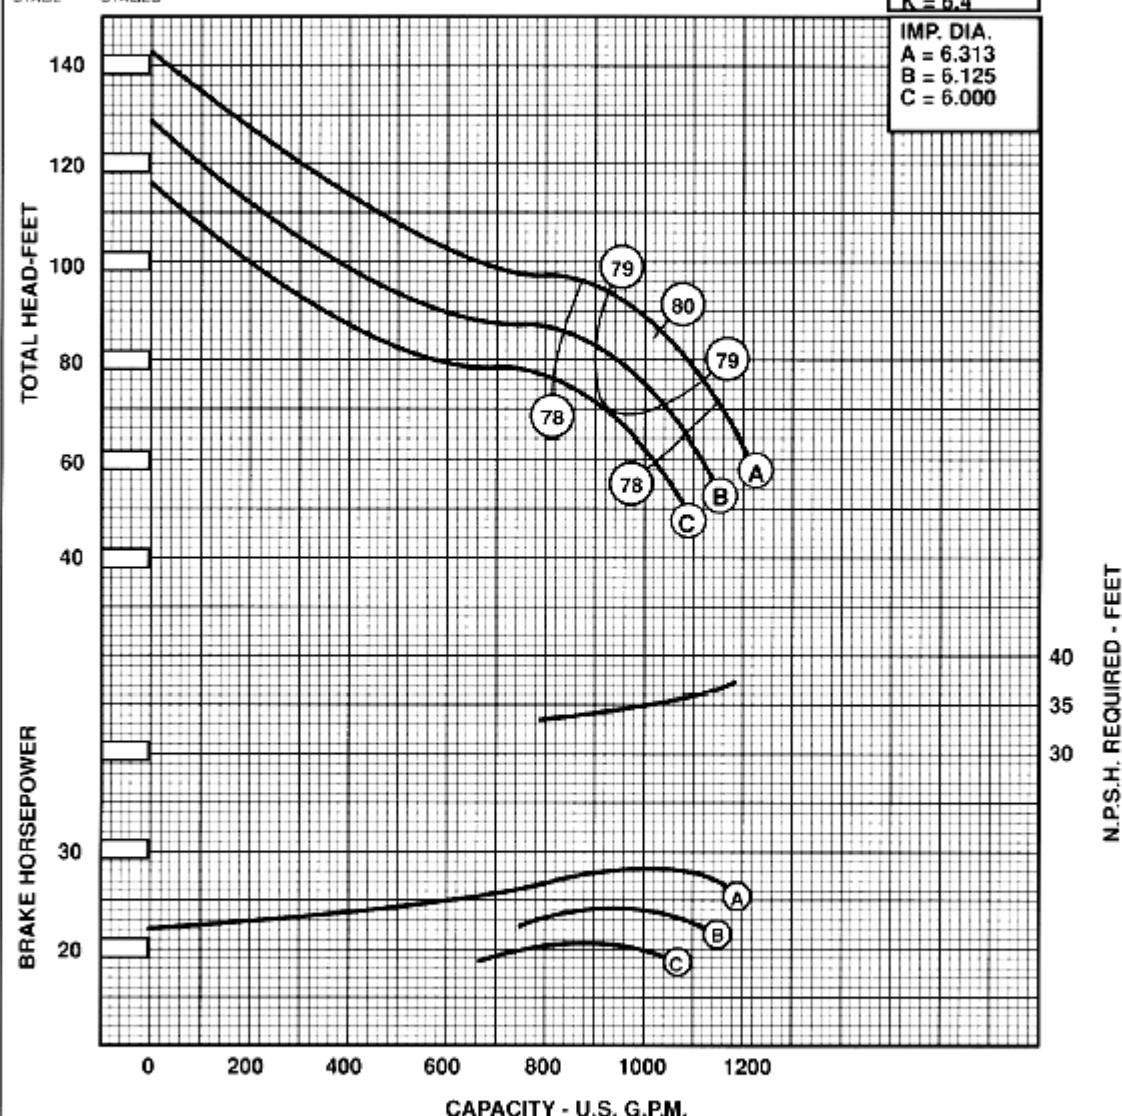


CURVE data**Verli-Line®**


No. Stages	Eff. Change	MATERIAL	Eff. Change
1	-4	IMP - C.I.	-1
2	-2	IMP - NI-RI	-1
3	+1	BOWL - BRZ	-2
4	0	BOWL - NI-R	-2

8FHM**3500** R.P.M.

SINGLE STAGE LAB PERFORMANCE WITH STANDARD MATERIALS. EFFICIENCY SHOWN FOR 4 OR MORE STAGES. HORSE POWER SHOWN FOR ONE STAGE BASED ON 4 STAGE EFFICIENCY CORRECTIONS SHOULD BE MADE FOR STAGES AND MATERIAL.

ONE
STAGE**PUMP PERFORMANCE**

EYE AREA - SQ. IN.	= 15.3	IMPELLER WT. - LBS.	= 10
W.P. PER IMPELLER LB.-FT.	= 0.240	ONE STAGE WT. - LBS.	= 125
MAX. NO. STD. STAGES	= 12	ADD'L STAGE WT. - LBS.	= 50
MAX. OPERATING - P.S.I.	= 800	DISCH. - IN.	= 6
STD. LATERAL - IN.	= 0.440	SUCTION - IN.	= 6
STD. SHAFT DIA. - IN.	= 1.188	BOWL CONN. THREADED COLLET	
MAX. SHAFT DIA. - IN.	= —	ADD 7.5" PER ADDITIONAL STAGE.	
MIN. SUBMERGENCE - IN.	= 21		

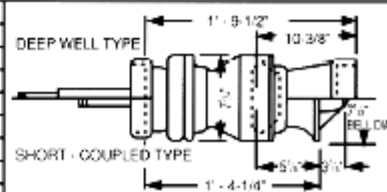

Curves reflect typical performance; refer to factory for verification.