

CURVE data


Verli-Line®

No. Stages	Eff. Change	MATERIAL	Eff. Change
1	-1.0	IMP. - C.I.	-1.0
2	NO CHG.		
3	NO CHG.		
4	NO CHG.		


32BRHC**580**

R.P.M.

SINGLE STAGE LAB PERFORMANCE WITH STANDARD MATERIALS. EFFICIENCY SHOWN FOR 3 OR MORE STAGES HORSE POWER SHOWN FOR ONE STAGE BASED ON 3 STAGE EFFICIENCY CORRECTIONS SHOULD BE MADE FOR STAGES AND MATERIAL.

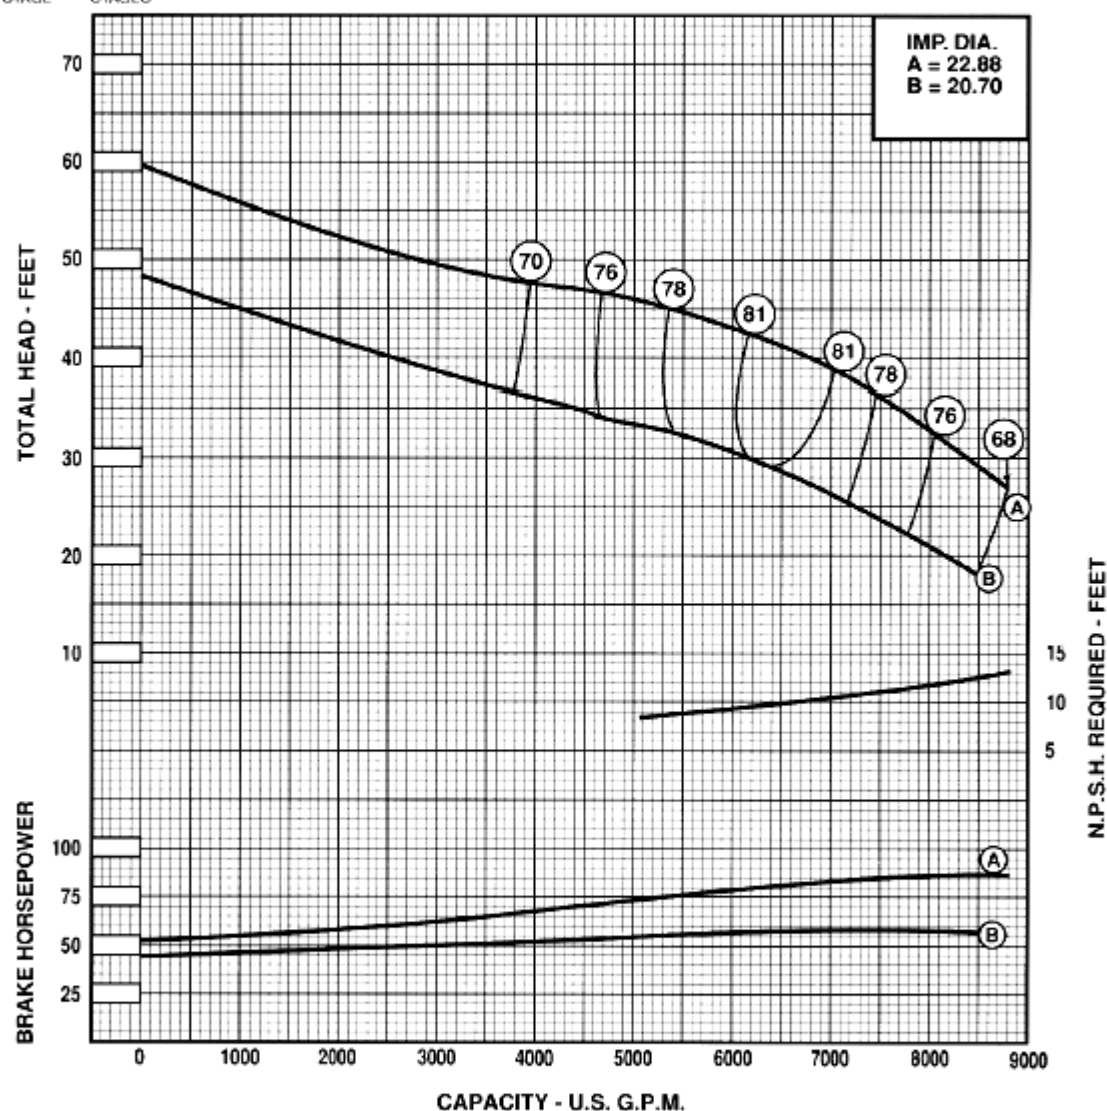ONE ()
STAGE STAGES**PUMP PERFORMANCE**

EYE AREA - SQ. IN.	= 166.0	IMPELLER WT. - LBS.	= 232
WRP PER IMPELLER LB.-FT. ²	= 149.80	ONE STAGE WT. - LBS.	= 3300
MAX. SPHERE SIZE	= 1.88	ADD'L STAGE WT. - LBS.	= 1650
MAX. NO. STD. STAGES	= 7	IMPELLER NUMBER	= YT5PA99
MAX. OPERATING - P.S.I.	= -----	DISCH. - IN.	= 24
STD. LATERAL - IN.	= 1.06	SUCTION - IN.	= -----
STD. SHAFT DIA. - IN.	= 5	MAX. LATERAL - IN.	= -----
MAX. SHAFT DIA. - IN.	= -----	BOWL / IMP. CONN.	/
MIN. SUBMERGENCE - IN.	= 50	ADD 24-1/4" PER ADDITIONAL STAGE.	



Curves reflect typical performance. refer to factory for certification.