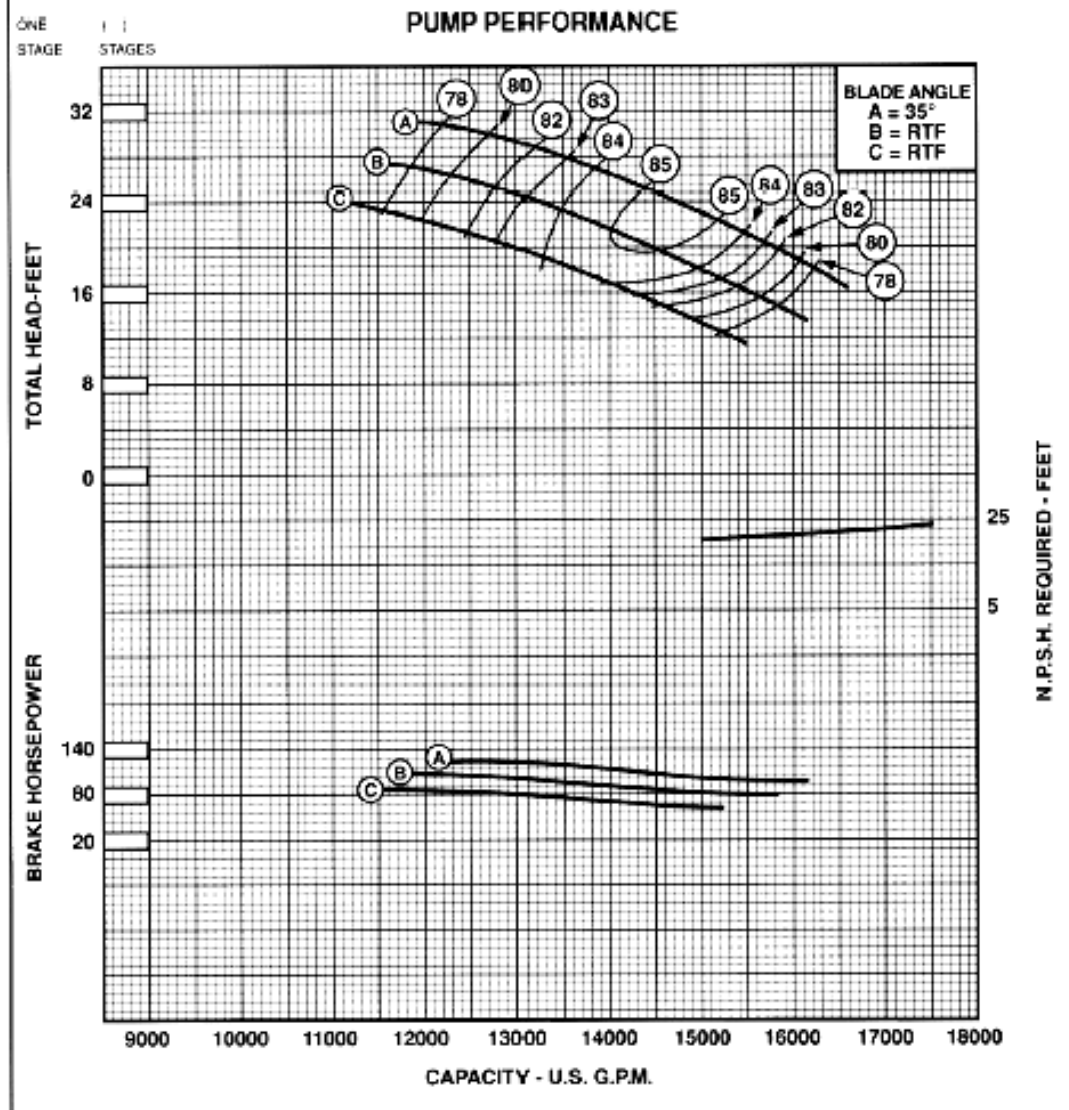


Veri-Line®**24LM****700** R.P.M.

IMPELLER DIAMETER	SHUT-OFF HEAD ft.	SHUT OFF HORSEPOWER	*K* FACTOR lbs. / ft.	MAX. SPHERES	
				IMP. PATT. NO.	2.0 in.
A	66.3	188.0	133.0	CASE PATT. NO.	-
B	58.5	137.0	133.0	DISCHARGE BOWL	24LM2
C	50.8	115.0	133.0	INTER. BOWL	24LM4

VAL70024LM1193

Curves reflect typical performance, refer to factory for certification