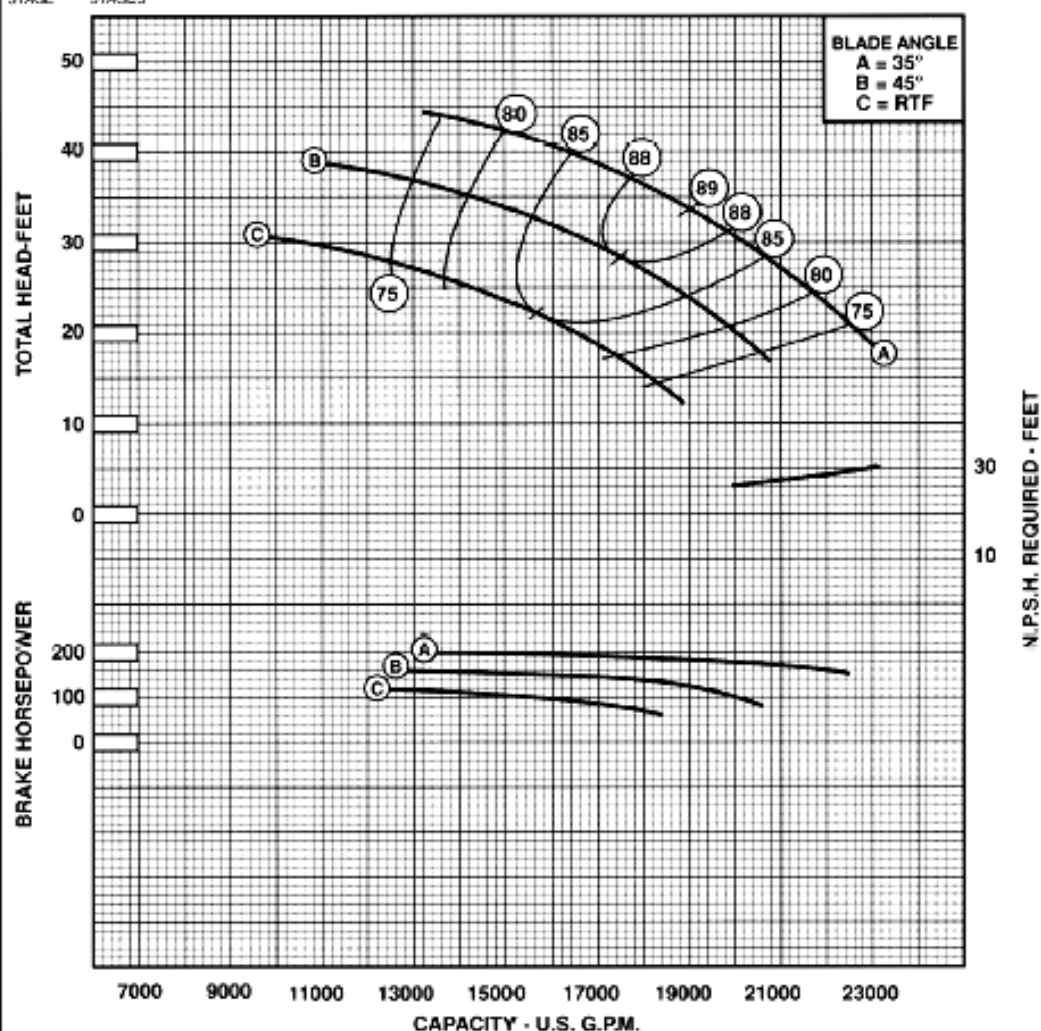


Veri-Line®**26LM****700**
R.P.M.ONE
STAGE ()
STAGES**PUMP PERFORMANCE**

IMPELLER DIAMETER	SHUT-OFF HEAD ft.	SHUT OFF HORSEPOWER	*K* FACTOR lbs. / ft.	MAX. SPHERES	
				IMP. PATT. NO.	2.0 in.
A	89.7	331.0	159.0	CASE PATT. NO.	26LM4A
B	77.8	234.0	159.0	DISCHARGE BOWL	26LM2
C	62.5	183.0	159.0	INTER BOWL	26LM4

VLD060861 M1160

Curves reflect typical performance. refer to factory for certification