

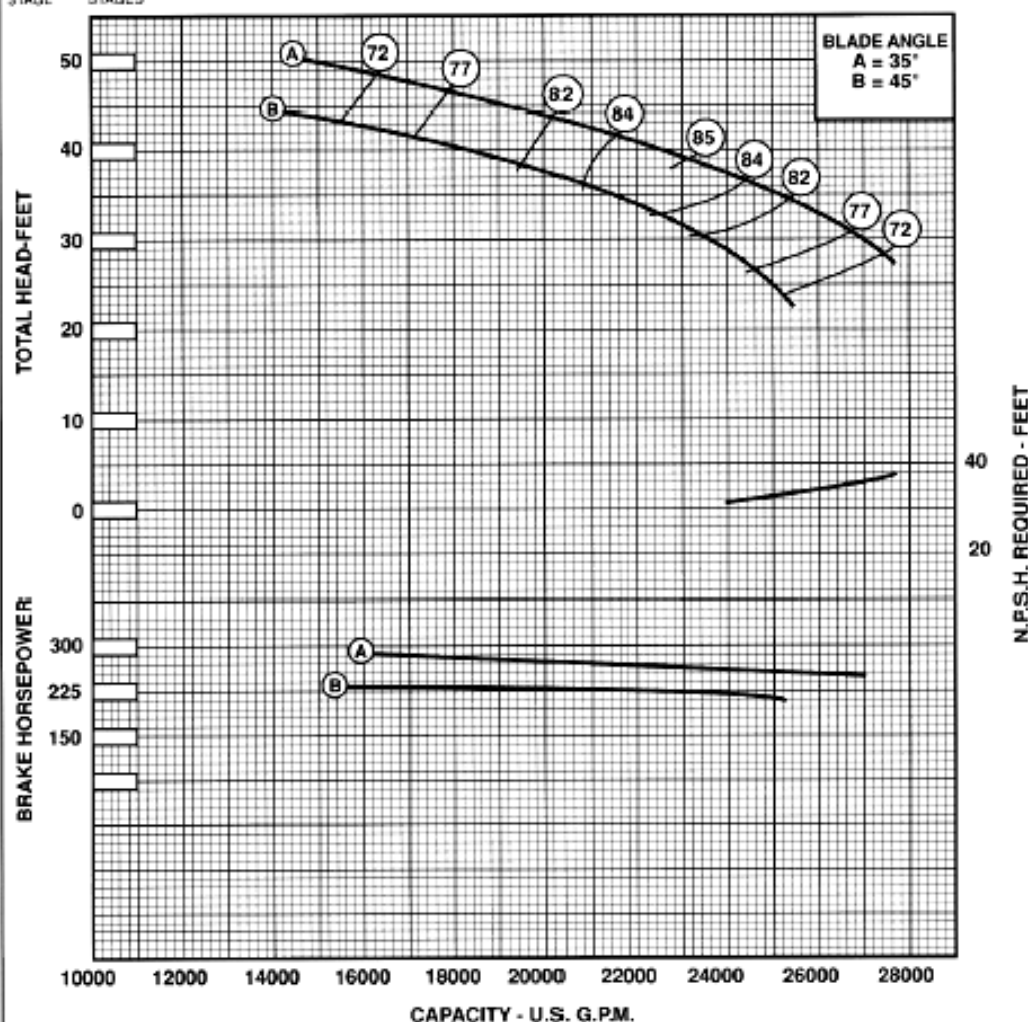
CURVE data

Verli-Line®

26LMA

700

R.P.M.

ONE
STAGE**PUMP PERFORMANCE**

IMPELLER DIAMETER	SHUT-OFF HEAD ft.	SHUT OFF HORSEPOWER	"K" FACTOR lbs. / ft.	MAX. SPHERES	2.0 in.
A	89.7	438.0	159.0	IMP. PATT. NO.	26LM6B
B	69.6	308.0	159.0	CASE PATT. NO.	-
				DISCHARGE BOWL	26LM2
				INTER. BOWL	26LM4

Curves reflect typical performance, refer to factory for verification.

V. 870206L MAX160