

Verli-Line®


No. Stages	Eff. Change	MATERIAL	Eff. Change
1	NO CHG.	IMP. - C.I.	-1.0
2	NO CHG.		
3	NO CHG.		
4	NO CHG.		

27BRM**705**


R.P.M.

SINGLE STAGE LAB PERFORMANCE WITH STANDARD MATERIALS. EFFICIENCY SHOWN FOR 3 OR MORE STAGES. HORSE POWER SHOWN FOR ONE STAGE BASED ON 3 STAGE EFFICIENCY. CORRECTIONS SHOULD BE MADE FOR STAGES AND MATERIAL.

ONE ()
STAGE STAGES

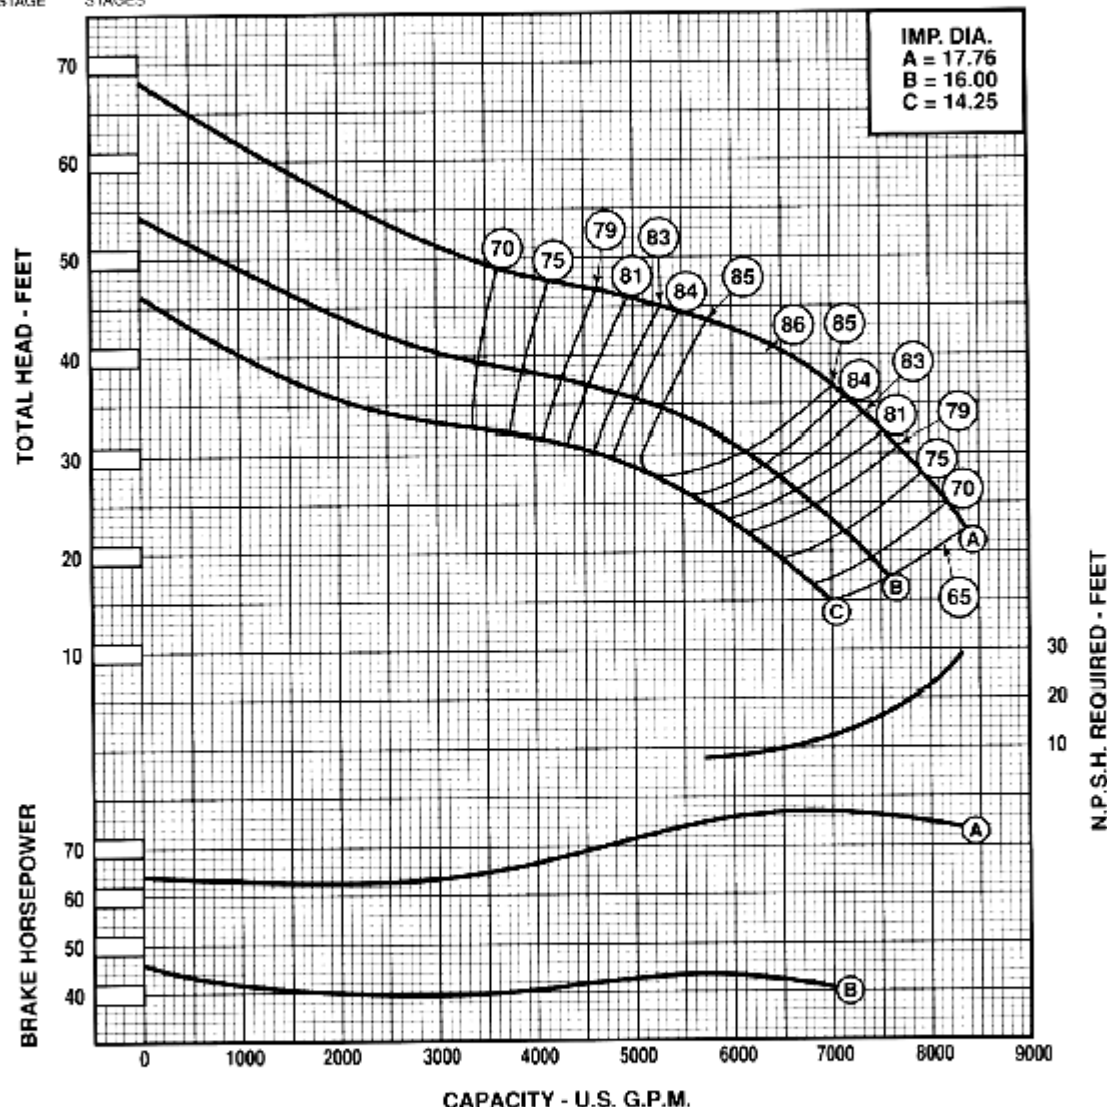PUMP PERFORMANCE

EYE AREA - SQ. IN.	= 139.36	IMPELLER WT - LBS.	= 225
WR' PER IMPELLER LB.-FT.	= 60.0	ONE STAGE WT - LBS.	= 1388
MAX. SPH. H. SIZE	= 2.75	ADD'L STAGE WT - LBS.	= 940
MAX. NO. STD. STAGES	= 7	IMPELLER NUMBER	= T7MKB32A
MAX. OPERATING - PSI	=	DISCH. - IN.	= 20
STD. LATERAL - IN.	= 1.25	SUCTION - IN.	=
STD. SHAFT DIA. - IN.	= 3.18	MAX. LATERAL - IN.	=
MAX. SHAFT DIA. - IN.	=	BOWL / IMP. CONN. -	
MIN. SUBMERGENCE - IN.	= 42	ADD 21 1/2" PER ADDITIONAL STAGE.	

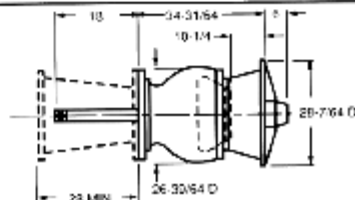

Curves reflect typical performance. Refer to factory for certification.