


CURVE data**Verli-Line®**

No. Stages	Eff. Change	MATERIAL	Eff. Change
1	-1.0	IMP. - C.J.	-1.0
2	NO CHG.		
3	NO CHG.		
4	NO CHG.		


36BRMC**705**

R.P.M.

SINGLE STAGE LAB PERFORMANCE WITH STANDARD MATERIALS. EFFICIENCY SHOWN FOR 3 OR MORE STAGES. HORSE POWER SHOWN FOR ONE STAGE BASED ON 3 STAGE EFFICIENCY. CORRECTIONS SHOULD BE MADE FOR STAGES AND MATERIAL.

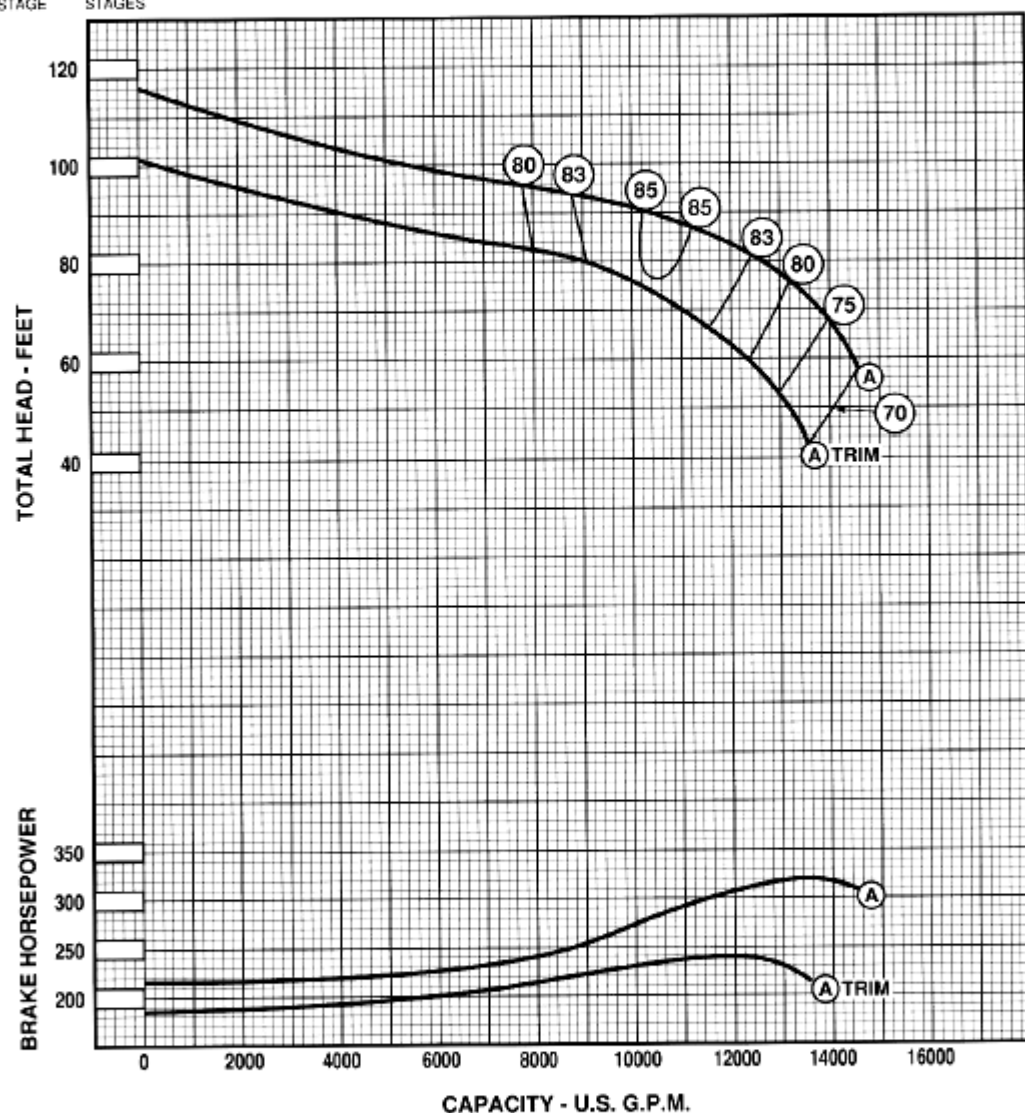ONE
STAGE**PUMP PERFORMANCE**

EYE AREA - SQ. IN.	= 215	IMPELLER WT. - LBS.	= 307
WR: PER IMPELLER LB.-FT. ²	= 305.00	ONE STAGE WT. - LBS.	= 3000
MAX. SPHERE SIZE	= 2.83	ADJ. STAGE WT. - LBS.	= 1750
MAX. NO. STD. STAGES	= 7	IMPELLER NUMBER	= YT6T92
MAX. OPERATING - P.S.I.	= -----	DISCH. - IN.	= 24
STD. LATERAL - IN.	= .88	SUCTION - IN.	= -----
STD. SHAFT DIA. - IN.	= 4.50	MAX. LATERAL - IN.	= -----
MAX. SHAFT DIA. - IN.	= -----	BOWL / IMP. CONN.	= -----
MIN. SUBMERGENCE - IN.	= 49	ADD 26-1/4" PER ADDITIONAL STAGE.	



Curves reflect typical performance. refer to factory for certification.