


Verli-Line®

No. Stages	Eff. Change	MATERIAL	Eff. Change
1	+1.0	IMP. - C.I.	+1.0
2	NO CHG		
3	NO CHG		
4	NO CHG		


20BRHC**880**

R.P.M.

SINGLE STAGE LAB PERFORMANCE WITH STANDARD MATERIALS. EFFICIENCY SHOWN FOR 3 OR MORE STAGES. HORSE POWER SHOWN FOR ONE STAGE BASED ON 3 STAGE EFFICIENCY. CORRECTIONS SHOULD BE MADE FOR STAGES AND MATERIAL.

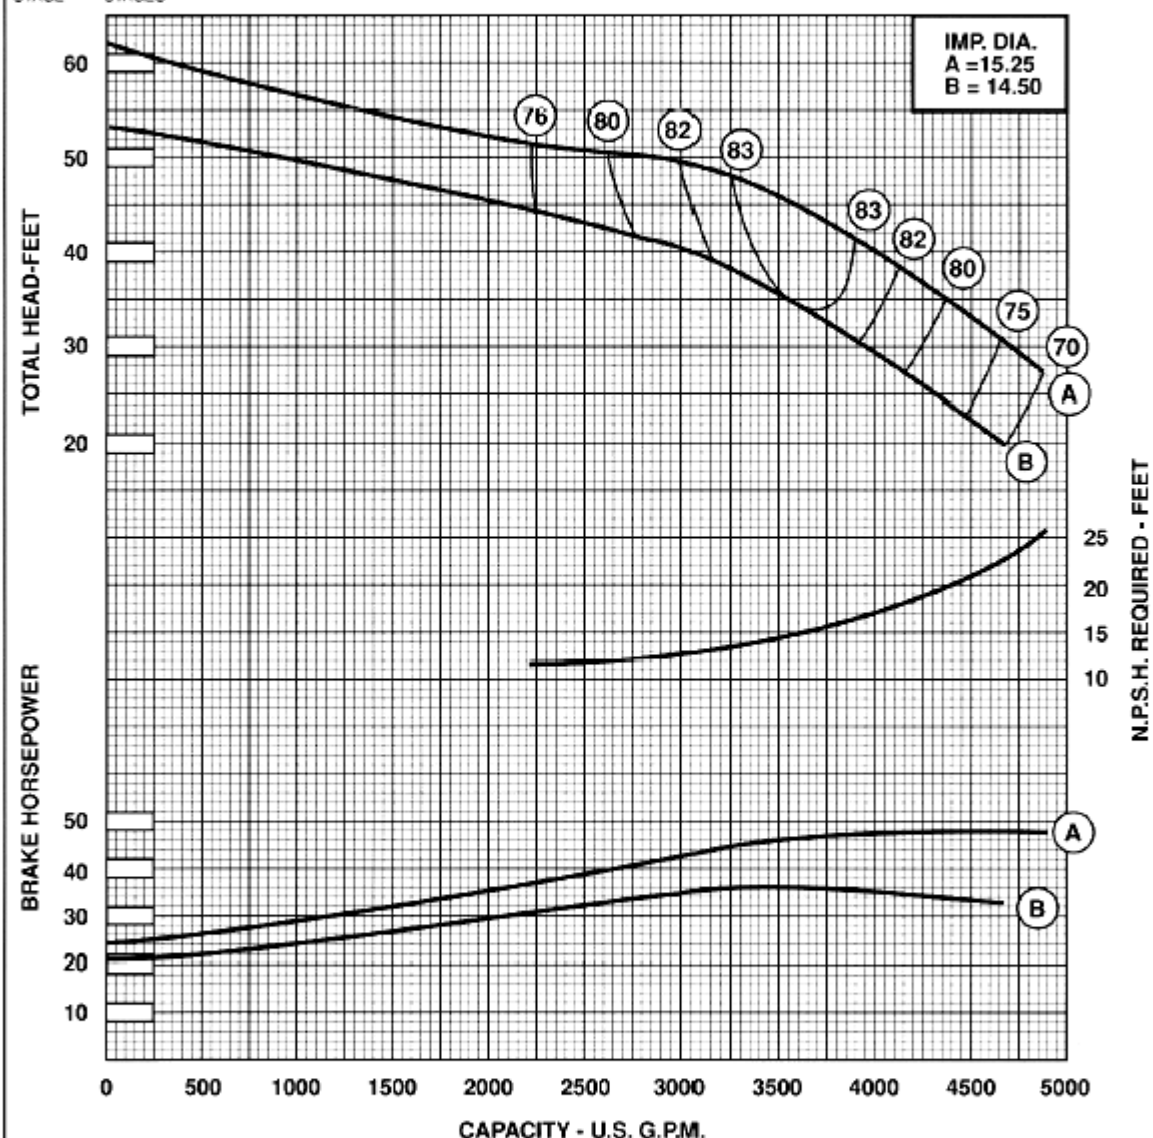ONE
STAGE**PUMP PERFORMANCE**

EYE AREA - SQ. IN.	= 74.80	IMPELLER WT. - LBS.	= 87
WR. PER IMPELLER LB.-FT. ²	= 17.69	ONE STAGE WT. - LBS.	= 1000
MAX. SPHERE SIZE	= 1.25	ADD'L STAGE WT. - LBS.	= 475
MAX. NO. STD. STAGES	= 12	IMPELLER NUMBER	= T5LB99
MAX. OPERATING - P.S.I.	= ----	DISCH. - IN.	= 14
STD. LATERAL - IN.	= .94	SUCTION - IN.	= 14
STD. SHAFT DIA. - IN.	= 2-11/16	MAX. LATERAL - IN.	= ----
MAX. SHAFT DIA. - IN.	= ----	BOWL/IMP. CONN.	= 1
MIN. SUBMERGENCE - IN.	= 36	ADD 15-7/8" PER ADDITIONAL STAGE.	

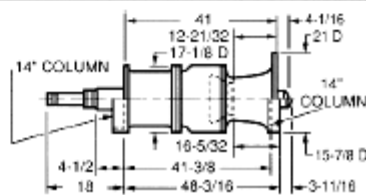

Curves reflect typical performance, refer to factory for certification.