


Verli-Line®

No. Stages	Eff. Change	MATERIAL	Eff. Change
1	-2	IMP. - C.I.	-1
2	0	IMP. - NI-RI	-1
3	0	BOWL - BRZ.	-2
		BOWL - NI-R.	-2


20 EHL**880**

R.P.M.

SINGLE STAGE LAB PERFORMANCE WITH STANDARD MATERIALS. EFFICIENCY SHOWN FOR 5 OR MORE STAGES. HORSE POWER SHOWN FOR ONE STAGE BASED ON 5 STAGE EFFICIENCY. CORRECTIONS SHOULD BE MADE FOR STAGES AND MATERIAL.

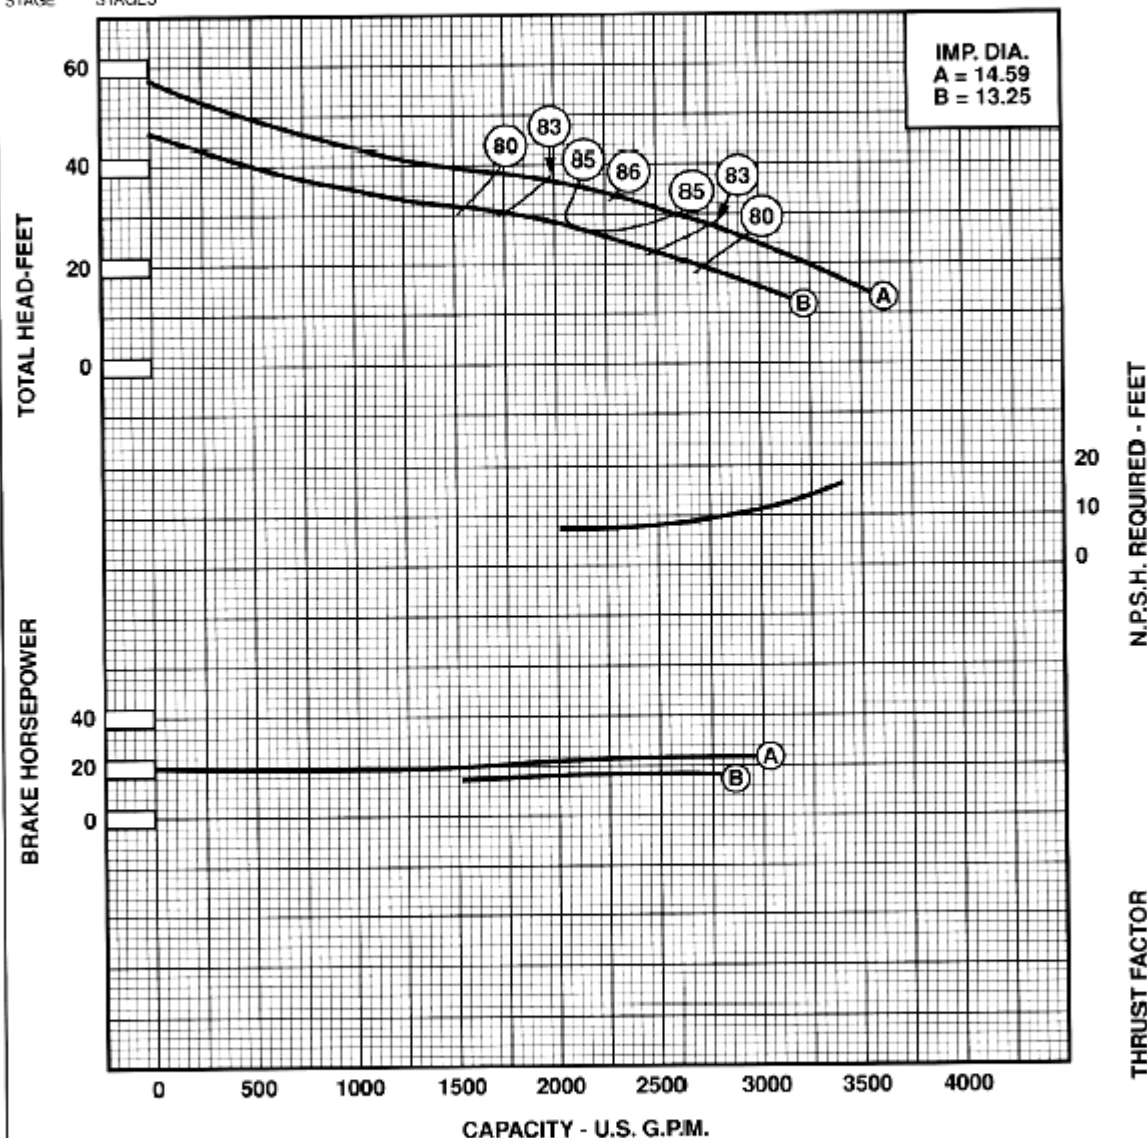ONE ()
STAGE STAGES**PUMP PERFORMANCE**

EYE AREA - SQ. IN.	= 61.2	IMPELLER WT. - LBS.	= 89
WR. PER IMPELLER LB. - FT. ²	= 10.94	ONE STAGE WT. - LBS.	= 920
MAX. SPHERE SIZE	= .000	ADJUL. STAGE WT. - LBS.	= 425
MAX. NO. STD. STAGES	= 7	IMPELLER NUMBER	= .000
MAX. OPERATING - PSI	= 200	DISCH. - IN.	= 16 CD
STD. LATERAL - IN.	= .560	SUCTION - IN.	= 14 CD
STD. SHAFT DIA. - IN.	= 2-7/16	MAX. LATERAL - IN.	= .000
MAX. SHAFT DIA. - IN.	= .000	BOWL CONN. - FLANGED - COLLET	
MIN. SUBMERGENCE - IN.	= 33	ADD 15" PER ADDITIONAL STAGE.	

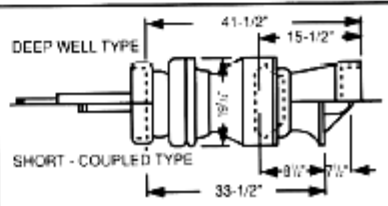

Curves reflect typical performance; refer to factory for certification.