

CURVE data**Verli-Line®**


No. Stages	Eff. Change	MATERIAL	Eff. Change
1	-2.5	IMP. - C.I.	-1.0
2	-1.5		
3	-0.5		
4	NO. CHG		

21BRH**880**


R.P.M.

SINGLE STAGE LAB PERFORMANCE WITH STANDARD MATERIALS. EFFICIENCY SHOWN FOR 3 OR MORE STAGES. HORSE POWER SHOWN FOR ONE STAGE BASED ON 3 STAGE EFFICIENCY. CORRECTIONS SHOULD BE MADE FOR STAGES AND MATERIAL.

ONE ()
STAGE STAGES

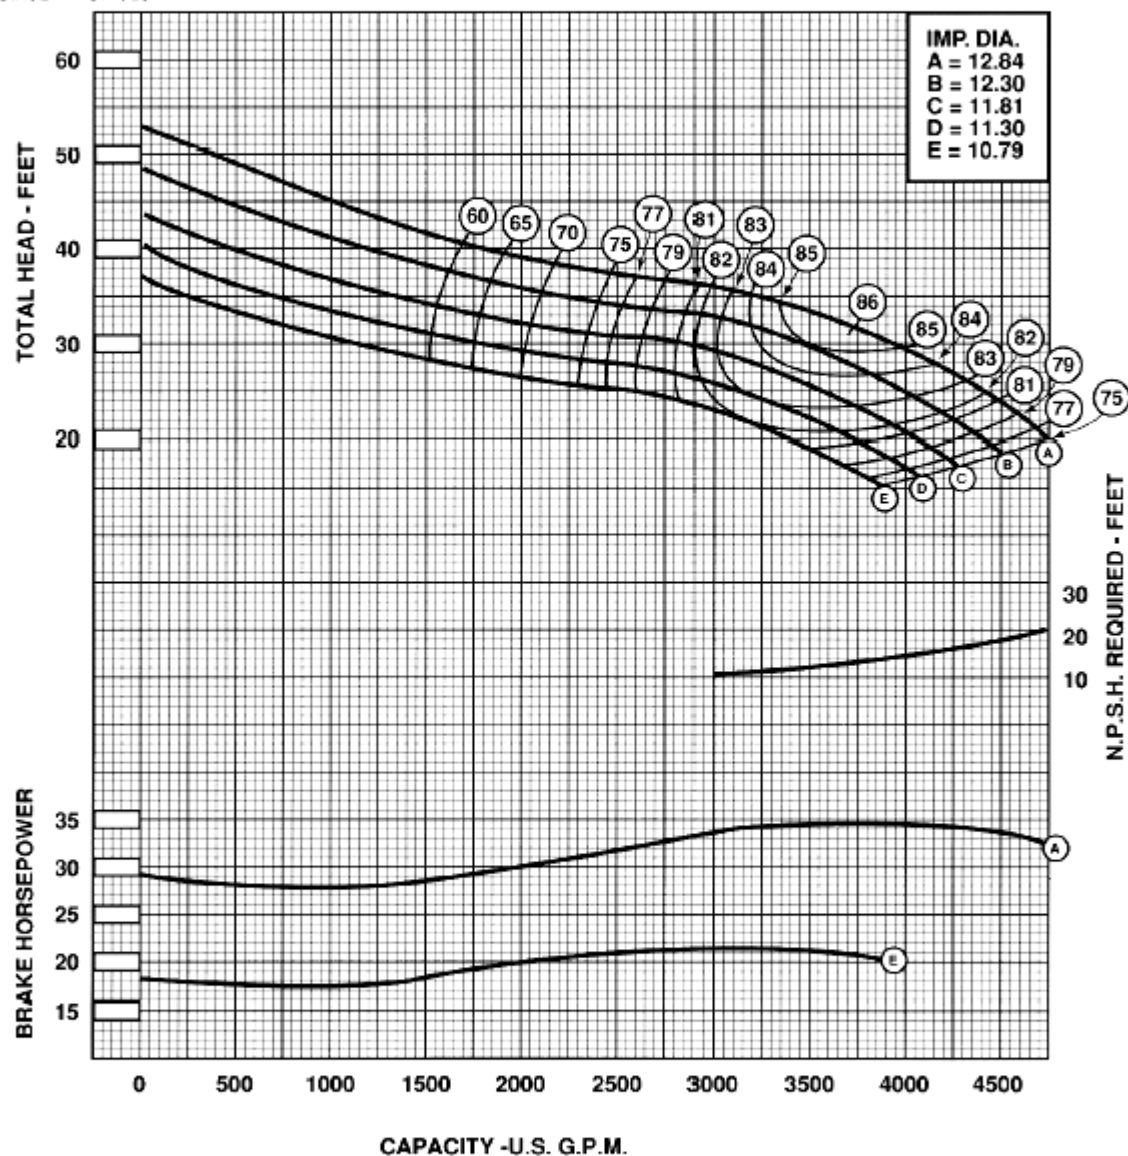PUMP PERFORMANCE

EYE AREA - SQ. IN.	= 77.5	IMPELLER WT. - LBS.	= 88
W.P. PER IMPELLER LB.-FT. ²	= 16.93	ONE STAGE WT. - LBS.	= 900
MAX. SPHERE SIZE	= 1.62	ADJVL STAGE WT. - LBS.	= 435
MAX. NO. STD. STAGES	= 5	IMPELLER NUMBER	= T7LK B99
MAX. OPERATING - P.S.I.	=	DISCH. - IN.	= 15
STD. LATERAL - IN.	= .84	SUCTION - IN.	=
STD. SHAFT DIA. - IN.	= 2-7/16	MAX. LATERAL - IN.	=
MAX. SHAFT DIA. - IN.	=	BOWL/IMP. CONN. —	
MIN. SURMERGENCE - IN.	= 31	ADD 19-1/8" PER ADDITIONAL STAGE.	

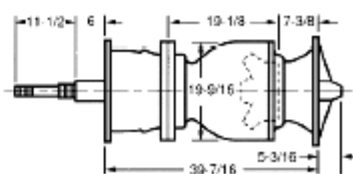

Curves reflect typical performance, refer to factory for certification.

Verli-Line


No. Stages	Eff. Change	MATERIAL	Eff. Change
1	-2.5	IMP. - C.I.	-1.0
2	-1.5		
3	-0.5		
4	NO CHG.		

21BRH***880**

R.P.M.


SINGLE STAGE LAB PERFORMANCE WITH STANDARD MATERIALS. EFFICIENCY SHOWN FOR 3 OR MORE STAGES. HORSE POWER SHOWN FOR ONE STAGE BASED ON 3 STAGE EFFICIENCY. CORRECTIONS SHOULD BE MADE FOR STAGES AND MATERIAL.

ONE { }
STAGE STAGES

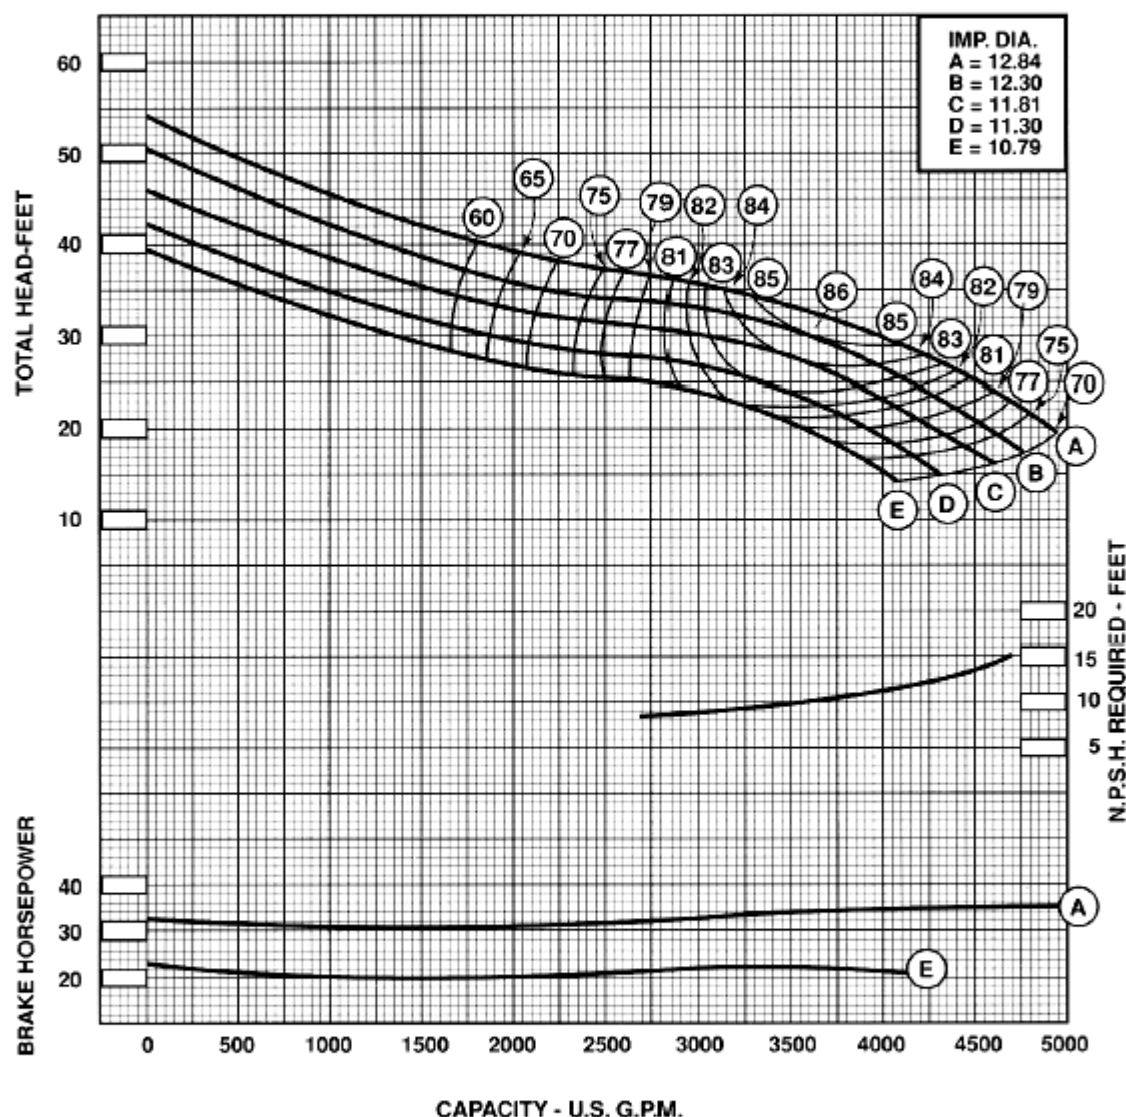PUMP PERFORMANCE

* SPECIAL FILING REQUIRED.

EYE AREA - SQ. IN.	= 77.5	IMPELLER WT. - LBS.	= 88
WR. PER IMPELLER LB.-FT. ²	= 16.93	ONE STAGE WT. - LBS.	= 900
MAX. SPHERE SIZE	= 1.62 IN.	ADD'L. STAGE WT. - LBS.	= 435
MAX. NO. STD. STAGES	= 5	IMPELLER NUMBER	= T7LKB99
MAX. OPERATING - P.S.I.	= -----	DISCH. - IN.	= 16
STD. LATERAL - IN.	= 94	SUCTION - IN.	= -----
STD. SHAFT DIA. - IN.	= 2.4375	MAX. LATERAL - IN.	= -----
MAX. SHAFT DIA. - IN.	= -----	BOWL/IMP. CONN. - -----	= -----
MIN. SUBMERGENCE - IN.	= 31	ADD 19-1/8" PER ADDITIONAL STAGE.	

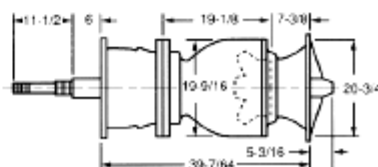

Curves reflect typical performance; refer to factory for certification.