

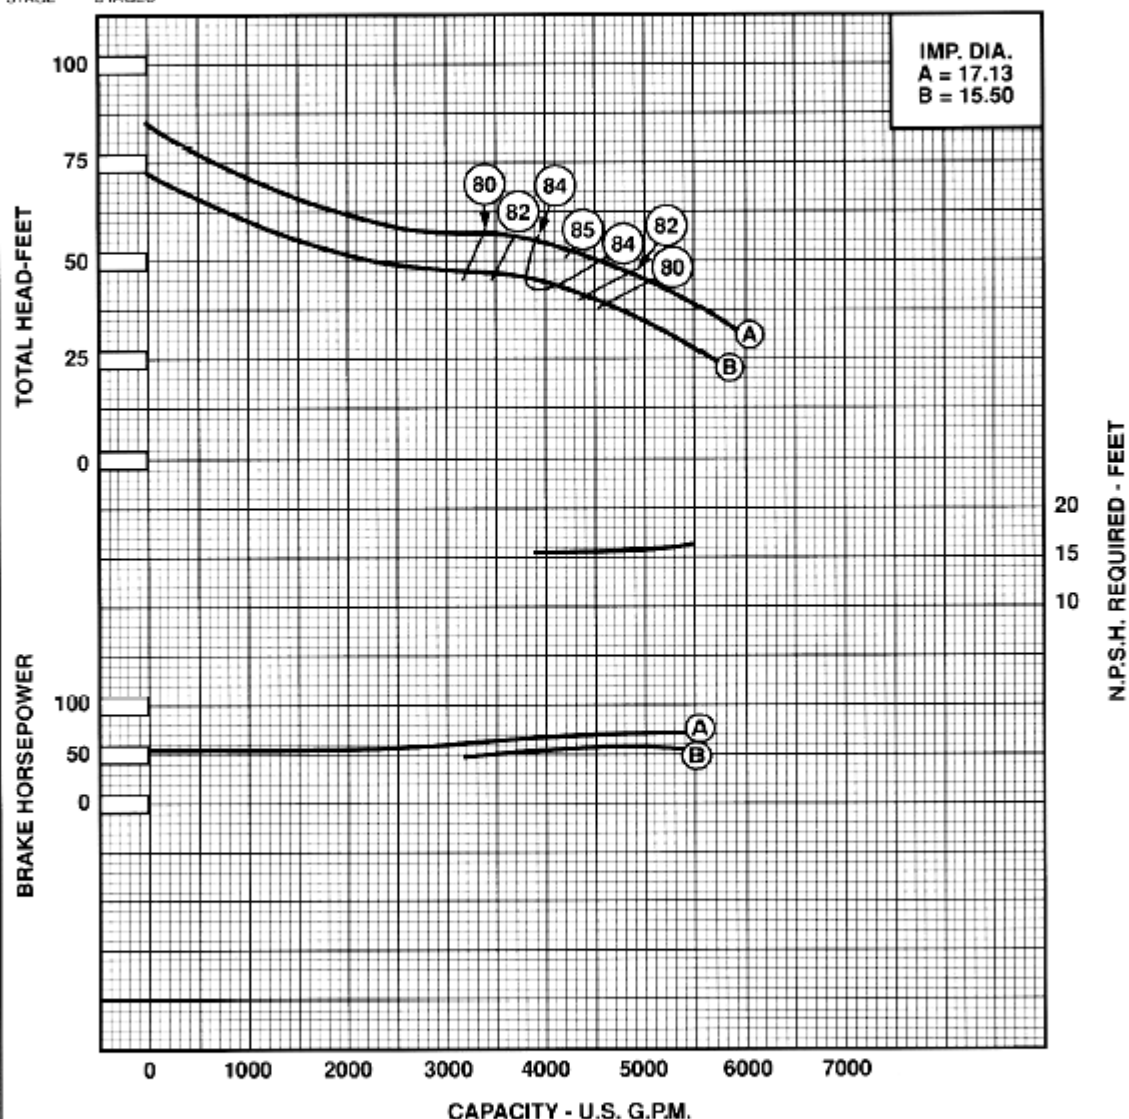
CURVE data**Verli-Line®**

No. Stages	Eff. Change	MATERIAL	Eff. Change
1	-3.5	IMP. - C.I.	-1
2	-1	IMP. - NI-RI	-1
3	0	BOWL - BRZ.	-2
5	1	BOWL - NI-R.	-2

24EHH**880**

R.P.M.

SINGLE STAGE LAB PERFORMANCE WITH STANDARD MATERIALS. EFFICIENCY SHOWN FOR 3 OR MORE STAGES. HORSE POWER SHOWN FOR ONE STAGE BASED ON 3 STAGE EFFICIENCY CORRECTIONS SHOULD BE MADE FOR STAGES AND MATERIAL.

ONE ()
STAGE STAGES**PUMP PERFORMANCE**

EYE AREA - SQ. IN.	= 68.92	IMPELLER WT. - LBS.	= 135
WR. PER IMPELLER LB.-FT. ²	= 26.2	ONE STAGE WT. - LBS.	= 1150
MAX. SPHERE SIZE	= - - - - -	ADD'L STAGE WT. - LBS.	= 850
MAX. NO. STD. STAGES	= 9	IMPELLER NUMBER	= - - - - -
MAX. OPERATING - P.S.I.	= 200	DISCH. - IN.	= 16 OD
STD. LATERAL - IN.	= 800	SUCTION - IN.	= 16 OD
STD. SHAFT DIA. - IN.	= 2-11/16	MAX. LATERAL - IN.	= - - - - -
MAX. SHAFT DIA. - IN.	= - - - - -	BOWL CONN. FLANGED - COLLET	
MIN. SUBMERGENCE - IN.	= 38	ADD 18" PER ADDITIONAL STAGE.	

