

CURVE data**Verli-Line®**

No Stages	Eff. Change	MATERIAL	Eff. Change
1	-1	IMP. - C.I.	-1
2	0	IMP. - NI-RI	-1
3	0	BOWL - BRZ.	-1
4	0	BOWL - NI-R.	-1

28SKKH**880**

R.P.M.


SINGLE STAGE LAB PERFORMANCE WITH STANDARD MATERIALS. EFFICIENCY SHOWN FOR 2 OR MORE STAGES. HORSE POWER SHOWN FOR ONE STAGE BASED ON 2 STAGE EFFICIENCY. CORRECTIONS SHOULD BE MADE FOR STAGES AND MATERIAL.

ONE
STAGE


1
STAGES

PUMP PERFORMANCE**K = 59.0**

IMP. DIA.
A = 20.875
B = 18.875
C = REFER TO
FACTORY

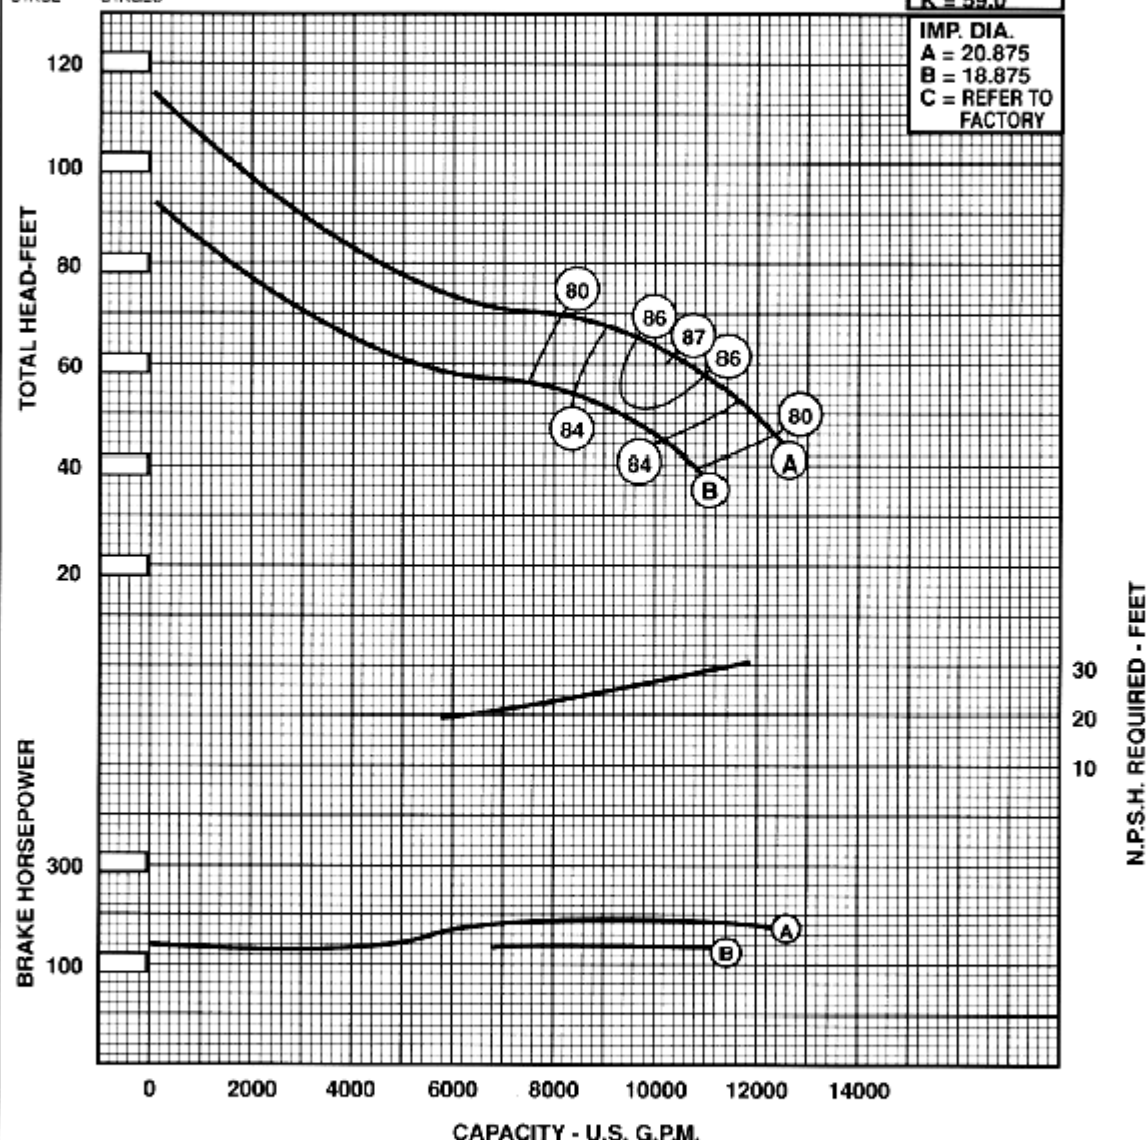

EYE AREA - SQ. IN.	= 140.0	IMPELLER WT. - LBS.	= 190
Wt. PER IMPELLER LB.-FT. ³	= 61.6	ONE STAGE WT. - LBS.	= 2300
MAX. NO. STD. STAGES	= 5	ADD'L STAGE WT. - LBS.	= 920
MAX. OPERATING - P.S.I.	= 200	DISCH. - IN.	= 16.20
STD. SHAFT DIA. - IN.	= 2.688	SUCTION - IN.	= BELL
MAX. SHAFT DIA. - IN.	= —	BOWL CONN. - FLANGED-COLLET	
MIN. SUBMERGENCE - IN.	= 57	ADD 22.75" PER ADDITIONAL STAGE	

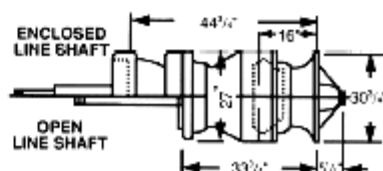

Curves reflect typical performance; refer to factory for certification