


**Verti-Line™**

| No. Stages | Eff. Change | MATERIAL     | Eff. Change |
|------------|-------------|--------------|-------------|
| 1          | -2          | IMP. - C.I.  | -1          |
| 2          | 0           | IMP. - NI-RI | -1          |
| 3          | 0           | BOWL - BRZ   | -1          |
| 4          | 0           | BOWL - NI-R  | -1          |

**30KL****880**


R.P.M.

SINGLE STAGE LAB PERFORMANCE WITH STANDARD MATERIALS. EFFICIENCY SHOWN FOR 2 OR MORE STAGES. HORSE POWER SHOWN FOR ONE STAGE BASED ON 2 STAGE EFFICIENCY CORRECTIONS SHOULD BE MADE FOR STAGES AND MATERIAL.

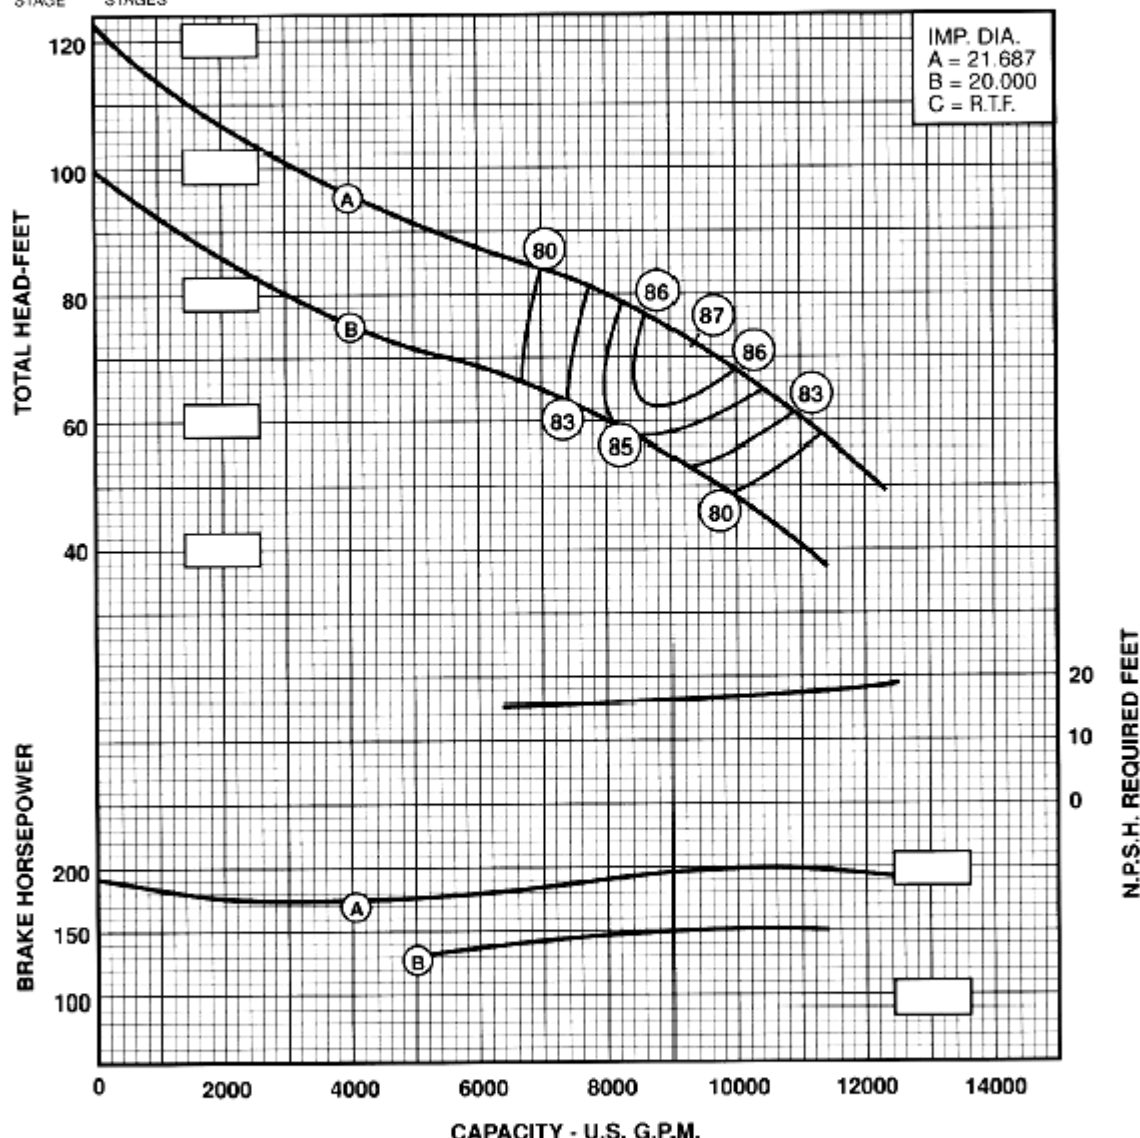ONE ( )  
STAGE STAGES**PUMP PERFORMANCE**

|                                       |          |
|---------------------------------------|----------|
| EYE AREA - SQ. IN.                    | = 173.75 |
| WT. PER IMPELLER LB. FT. <sup>2</sup> | = 122.0  |
| MAX. NO. STG. STAGES                  | = 3      |
| MAX. OPERATING - P.S.I.               | = 300    |
| STD. SHAFT DIA. - IN.                 | = 3.25   |
| MAX. SHAFT DIA. - IN.                 | = —      |
| MIN. SUBMERGENCE - IN.                | = 60     |

|                                 |         |
|---------------------------------|---------|
| IMPELLER WT. - LBS.             | = 246   |
| ONE STAGE WT. - LBS.            | = 3000  |
| ADD'L STAGE WT. - LBS.          | = 1300  |
| DISCH. - IN.                    | = 16.20 |
| SUCTION - IN.                   | = BELL  |
| BOWL CONN. FLANGED-KEYED        |         |
| ADD 28.5" PER ADDITIONAL STAGE. |         |

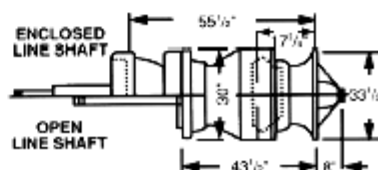

Curves reflect typical performance; refer to factory for certification.