

CURVE data

Verli-Line®

No. Stages	Eff. Change	MATERIAL	Eff. Change
1	-2	IMP. - C.I.	-2
2	-0	IMP. - NI-RI	-1
3	0	BOWL - BRZ.	-1
		BOWL - NI-RI	-1

30KM


880

R.P.M.

SINGLE STAGE LAB PERFORMANCE WITH STANDARD MATERIALS. EFFICIENCY SHOWN FOR 2 OR MORE STAGES. HORSE POWER SHOWN FOR ONE STAGE BASED ON 2 STAGE EFFICIENCY. CORRECTIONS SHOULD BE MADE FOR STAGES AND MATERIAL.


ONE
STAGE ()
STAGES

PUMP PERFORMANCE

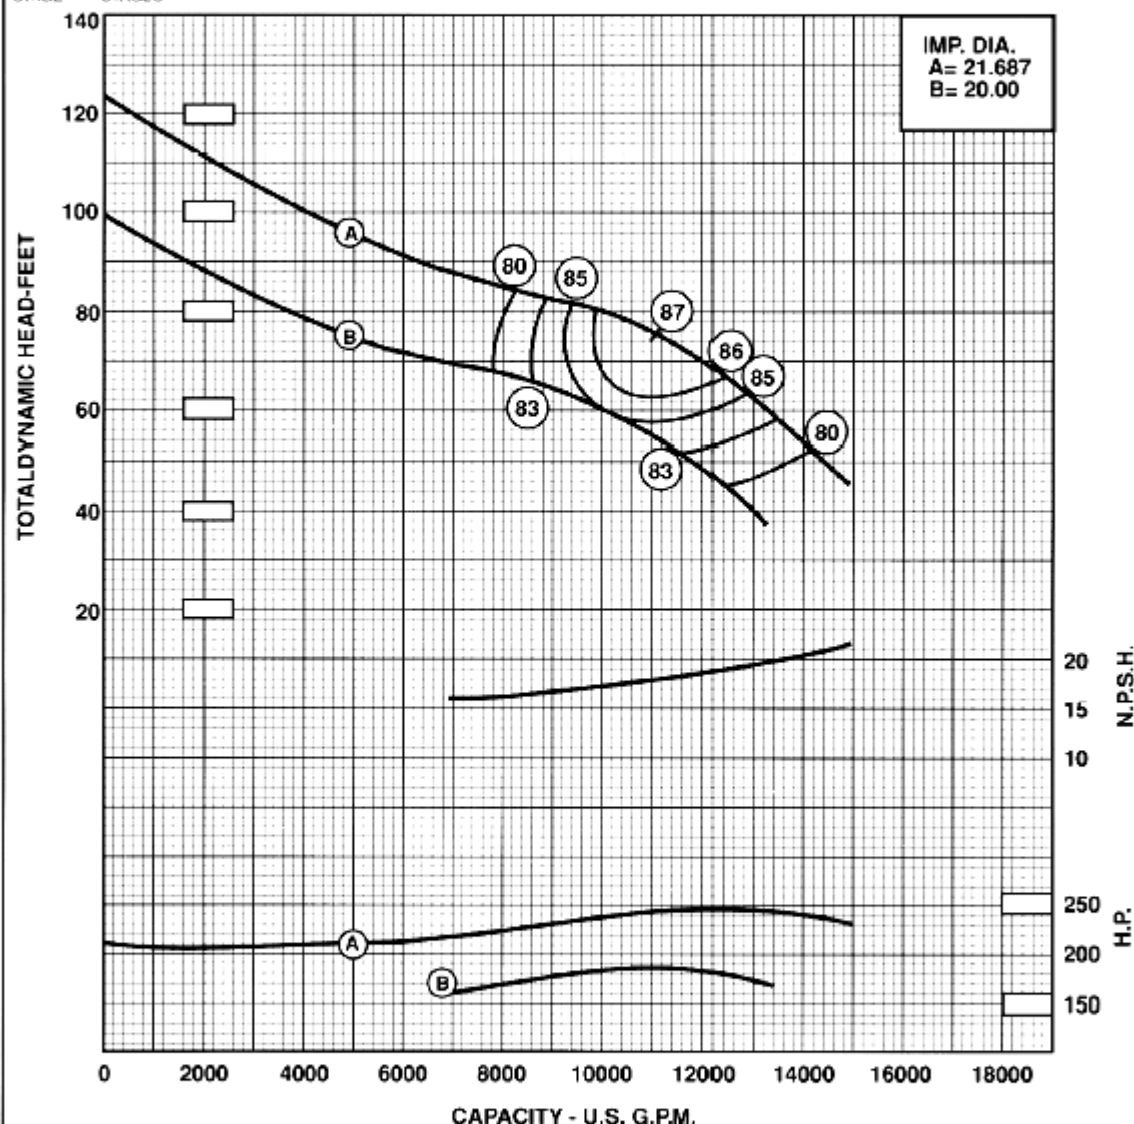

EYE AREA - SQ. IN.	= 173.75	IMPELLER WT. - LBS.	= 498
WR. PER IMPELLER LB.-FT.	= 122	ONE STAGE WT. - LBS.	= 3000
MAX. SPHERE SIZE	= --	ADD'L STAGE WT. - LBS.	= 1500
MAX. NO. STD. STAGES	= 8	IMPELLER NUMBER	= --
MAX. OPERATING - P.S.I.	= 300	DISCH. - SIZES	= 12
STD. LATERAL - IN.	= 1.375	SUCTION - SIZES	= 33 1/2 BELL
STD. SHAFT DIA. - IN.	= 2 11/16	MAX. LATERAL IN.	= --
MAX. SHAFT DIA. - IN.	= --	BOWL CONN. FLANGED-COLLET	
MIN. SUBMERGENCE - IN.	= 60	ADD 28 1/2" PER ADDITIONAL STAGE.	

DEEP WELL TYPE

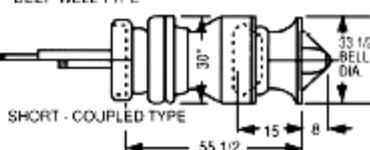

Curves reflect typical performance, refer to factory for certification