


CURVE data**Verli-Line®**

No. Stages	Eff. Change	MATERIAL	Eff. Change
1	-1.0	IMP. - C.I.	-1.0
2	NO CHG.		
3	NO CHG.		
4	NO CHG.		


36BRMC**880 R.P.M.**

SINGLE STAGE LAB PERFORMANCE WITH STANDARD MATERIALS. EFFICIENCY SHOWN FOR 3 OR MORE STAGES. HORSE POWER SHOWN FOR ONE STAGE BASED ON 3 STAGE EFFICIENCY CORRECTIONS SHOULD BE MADE FOR STAGES AND MATERIAL.

ONE ()
STAGE STAGES

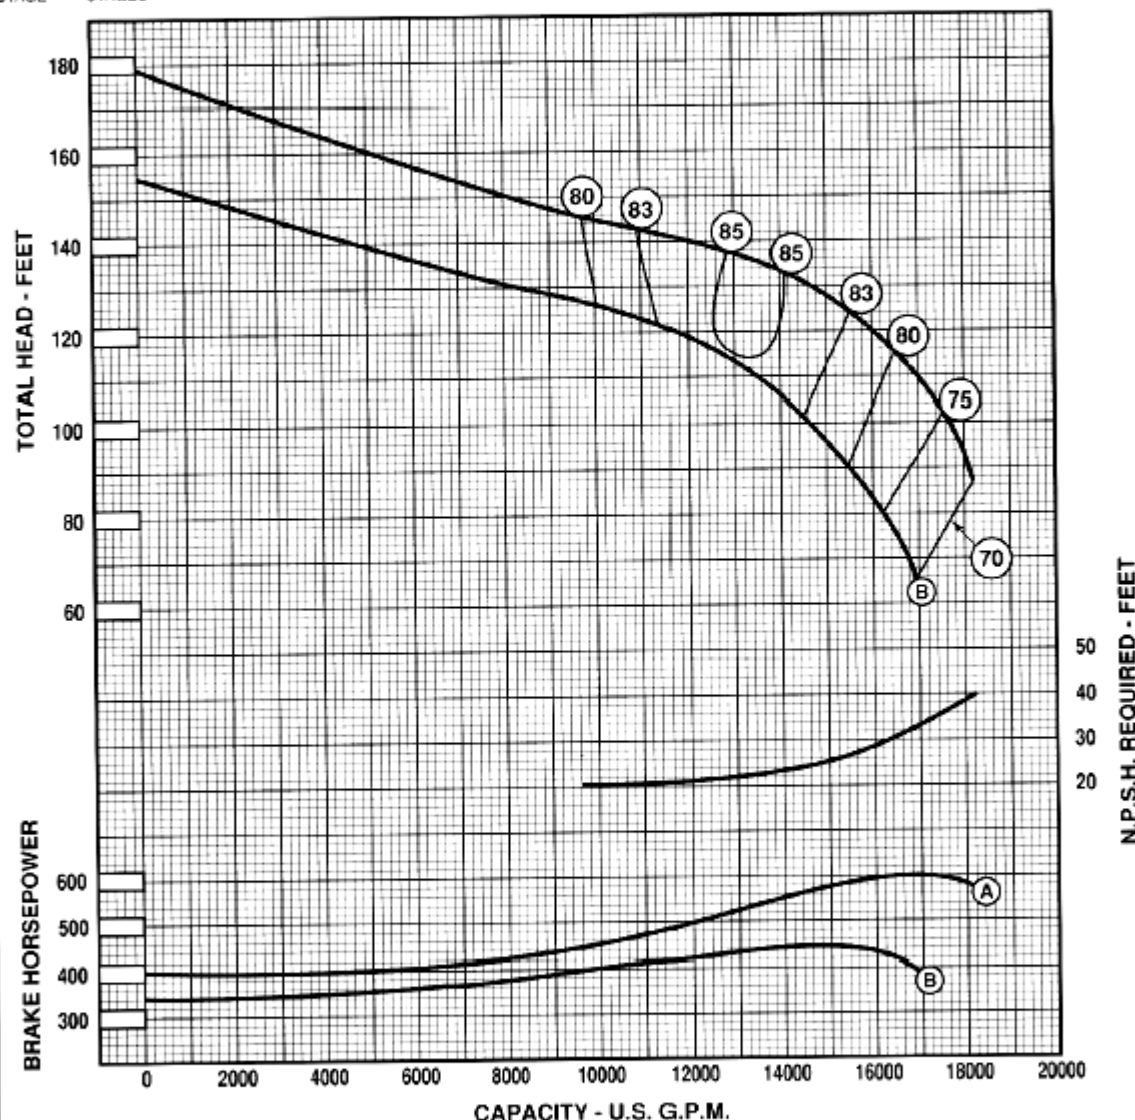PUMP PERFORMANCE

EYE AREA - SQ. IN.	= 216	IMPELLER WT. - LBS.	= 307
WR. PER IMPELLER LB.-FT. ²	= 306.00	ONE STAGE WT. - LBS.	= 3000
MAX. SPHERE SIZE	= 2.63	ADD'L STAGE WT. - LBS.	= 1750
MAX. NO. STD. STAGES	= 6	IMPELLER NUMBER	= YT6T92
MAX. OPERATING - P.S.I.	=	DISCH. - IN.	=
STD. LATERAL - IN.	= 0.88	SUCTION - IN.	=
STD. SHAFT DIA. - IN.	= 4.5	MAX. LATERAL - IN.	=
MAX. SHAFT DIA. - IN.	=	BOWL / IMP. CONN.	=
MIN. SUBMERGENCE - IN.	= 49	ADD 25-1/4" PER ADDITIONAL STAGE	



Curves reflect typical performance, refer to factory for certification.