




PUMPS

VERTICAL TURBINE PUMP

MODEL 28 C-980

VC-61

Dated 07/01/94

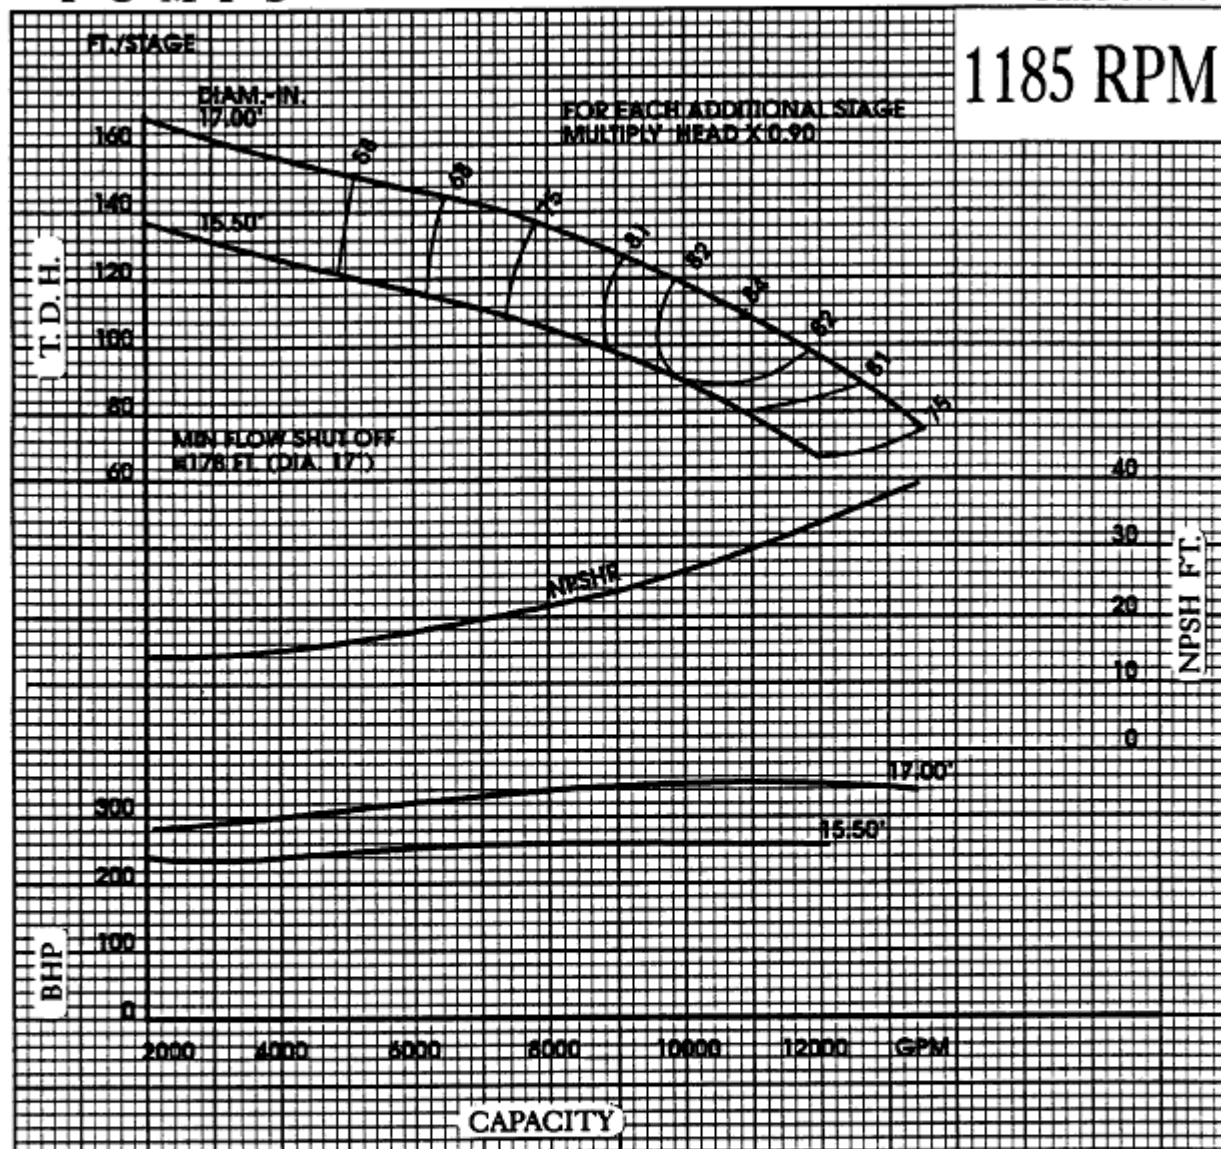

1185 RPM

Efficiency shown is for stages or more, with standard materials. For fewer stages change efficiency as shown.

No. of stages.	Eff. change	No. of stages.	Eff. change
1	—	4	—
2	-5.0	5	—
3	-1.0	6	—

TECHNICAL DATA

	LBS.
Bowl wt. add stage (lbs.)	850
Rotor wt. per stage (lbs.)	180
Bowl wt. first stage (lbs.)	1450
Thrust factor	58
Max bowl horsepower	1200
Impeller eye area (sq. inch.)	140

CUSTOMER:

FLUID:

SP. GR.:

EFF.:

SERVICE:

CAPACITY:

VISC.:

BHP:

DATE:

T. D. H.:

NPSHA:

NPSHR: