



PUMPS


VERTICAL TURBINE PUMP

MODEL 10 A-22

VC-27

Dated 07/01/94

1760 RPM

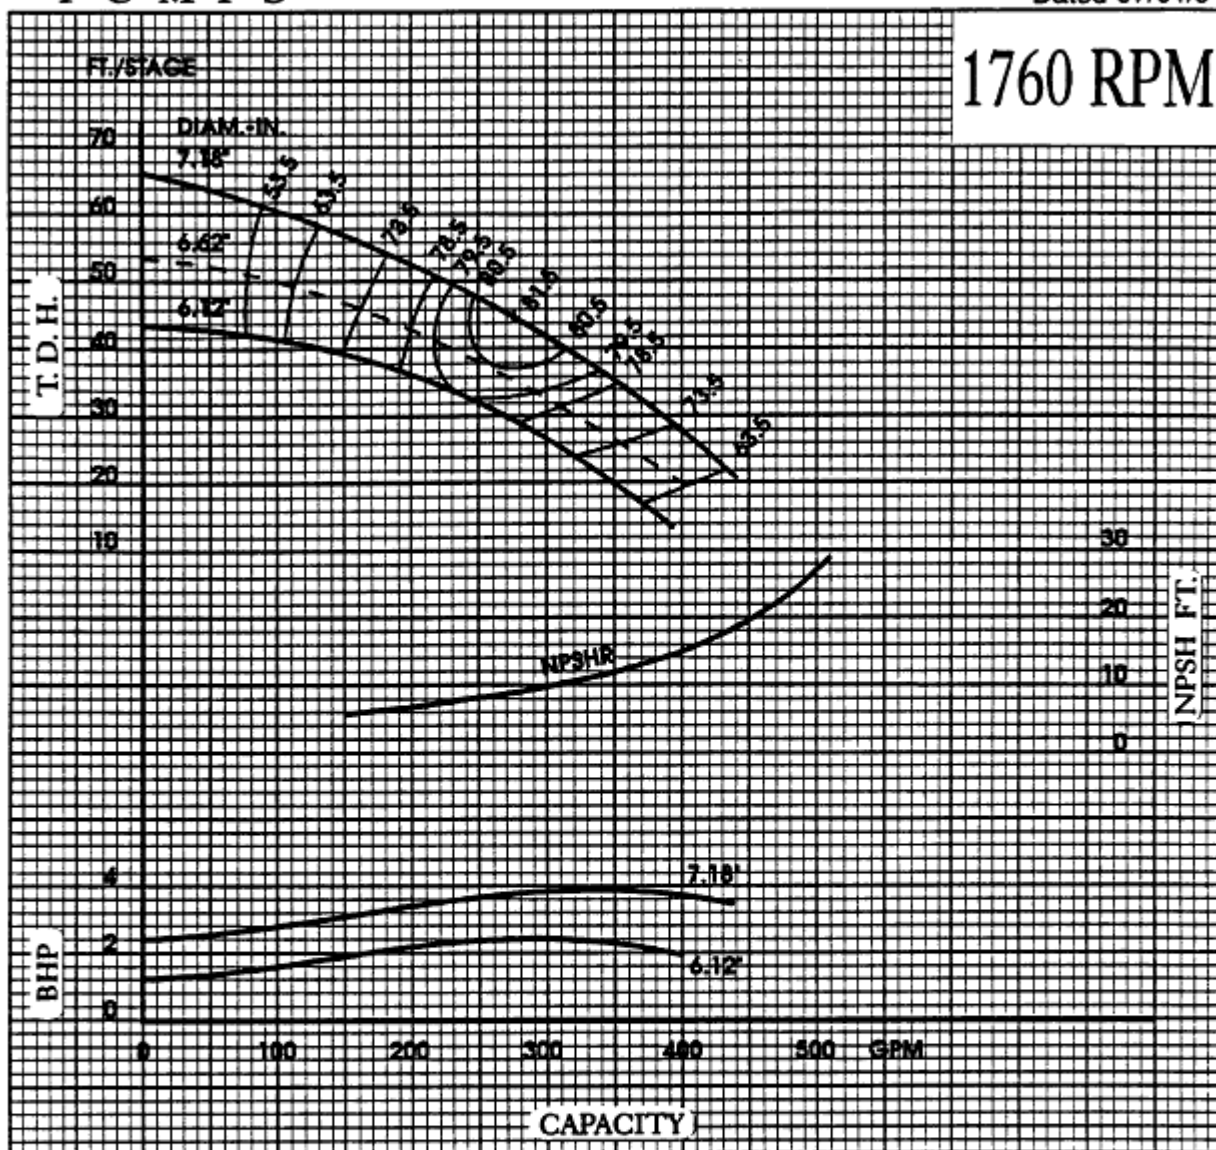

Efficiency shown is for 4 stages or more, with standard materials. For fewer stages change efficiency as shown.

No. of stages.	Eff. change	No. of stages.	Eff. change
1	- 3.0	4	—
2	- 2.0	5	—
3	- 1.0	6	—

TECHNICAL DATA

	LBS.
Bowl wt. addl stage (lbs.)	57
Rotor wt. per stage (lbs.)	14
Bowl wt. first stage (lbs.)	163
Thrust factor	4
Max bowl horsepower	140
Impeller eye area (sq. inch.)	7.8

CUSTOMER:

FLUID:

SP. GR.:

EFF.:

SERVICE:

CAPACITY:

VISC.:

BHP:

DATE:

T. D. H.:

NPSHA:

NPSHR: