



VERTICAL TURBINE PUMP


MODEL 10 C-75

VC-32

Dated 07/01/94

PUMPS

1760 RPM

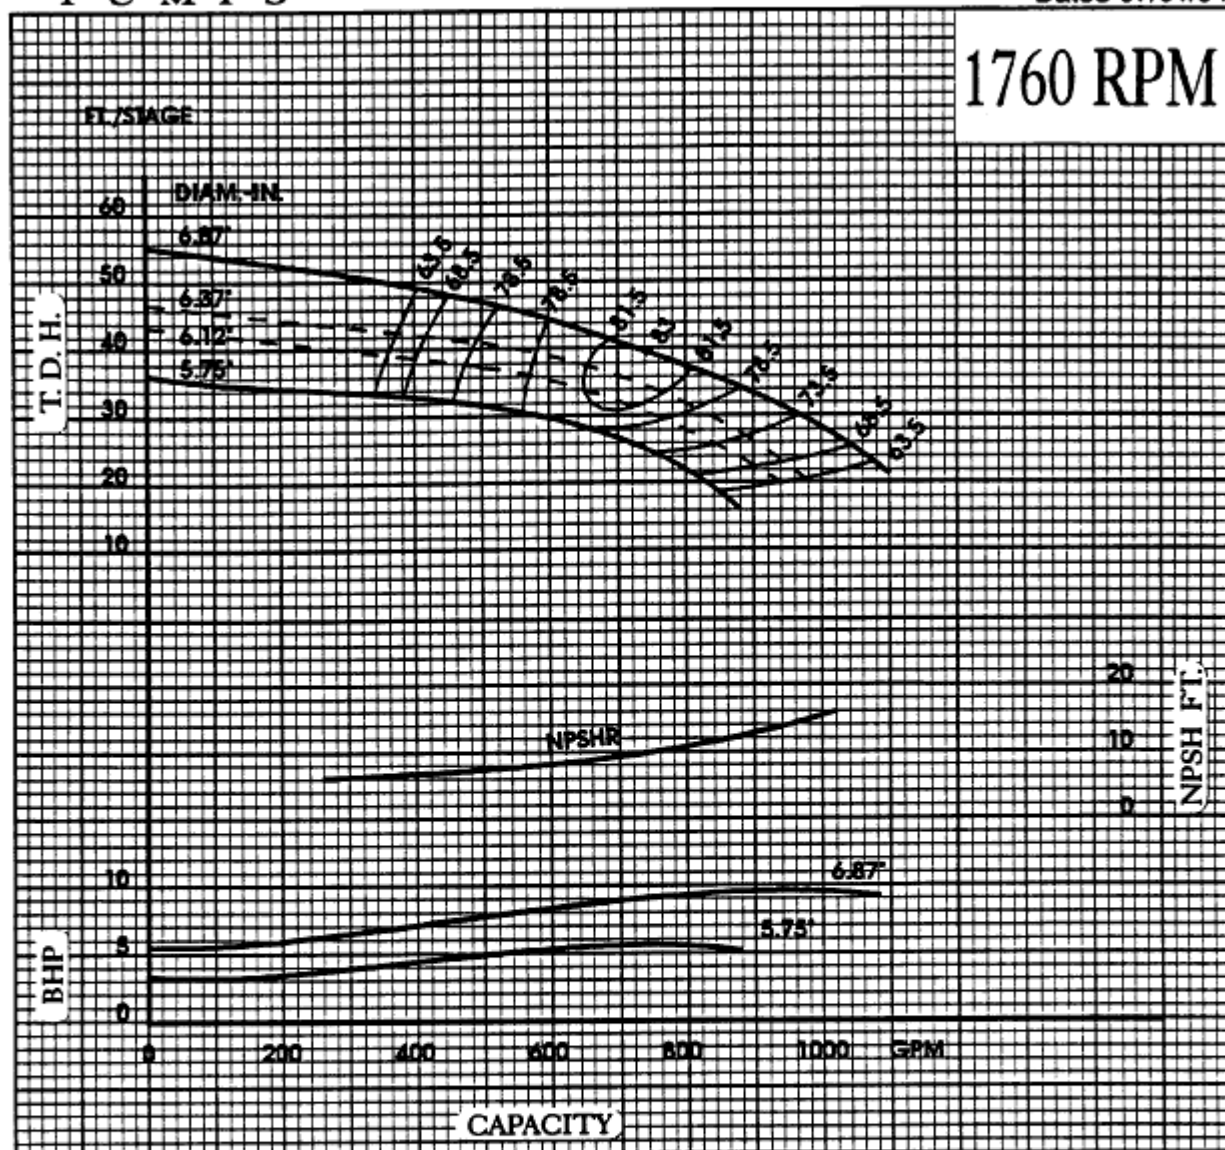

Efficiency shown is for 4 stages or more, with standard materials. For fewer stages change efficiency as shown.

No. of stages.	Eff. change	No. of stages.	Eff. change
1	-2.0	4	—
2	-1.0	5	—
3	-0.5	6	—

TECHNICAL DATA

Bowl wt. addl stage (lbs.)
Rotor wt. per stage (lbs.)
Bowl wt. first stage (lbs.)
Thrust factor
Max bowl horsepower
Impeller eye area (sq. inch.)

LBS.

58
16
165
7
140
14.2

CUSTOMER:

FLUID:

SP. GR.:

EFF.:

SERVICE:

CAPACITY:

VISC.:

BHP:

DATE:

T. D. H.:

NPSHA:

NPSHR: