




VERTICAL TURBINE PUMP

MODEL 10D-90

VC-33

Dated 07/01/94

1760 RPM

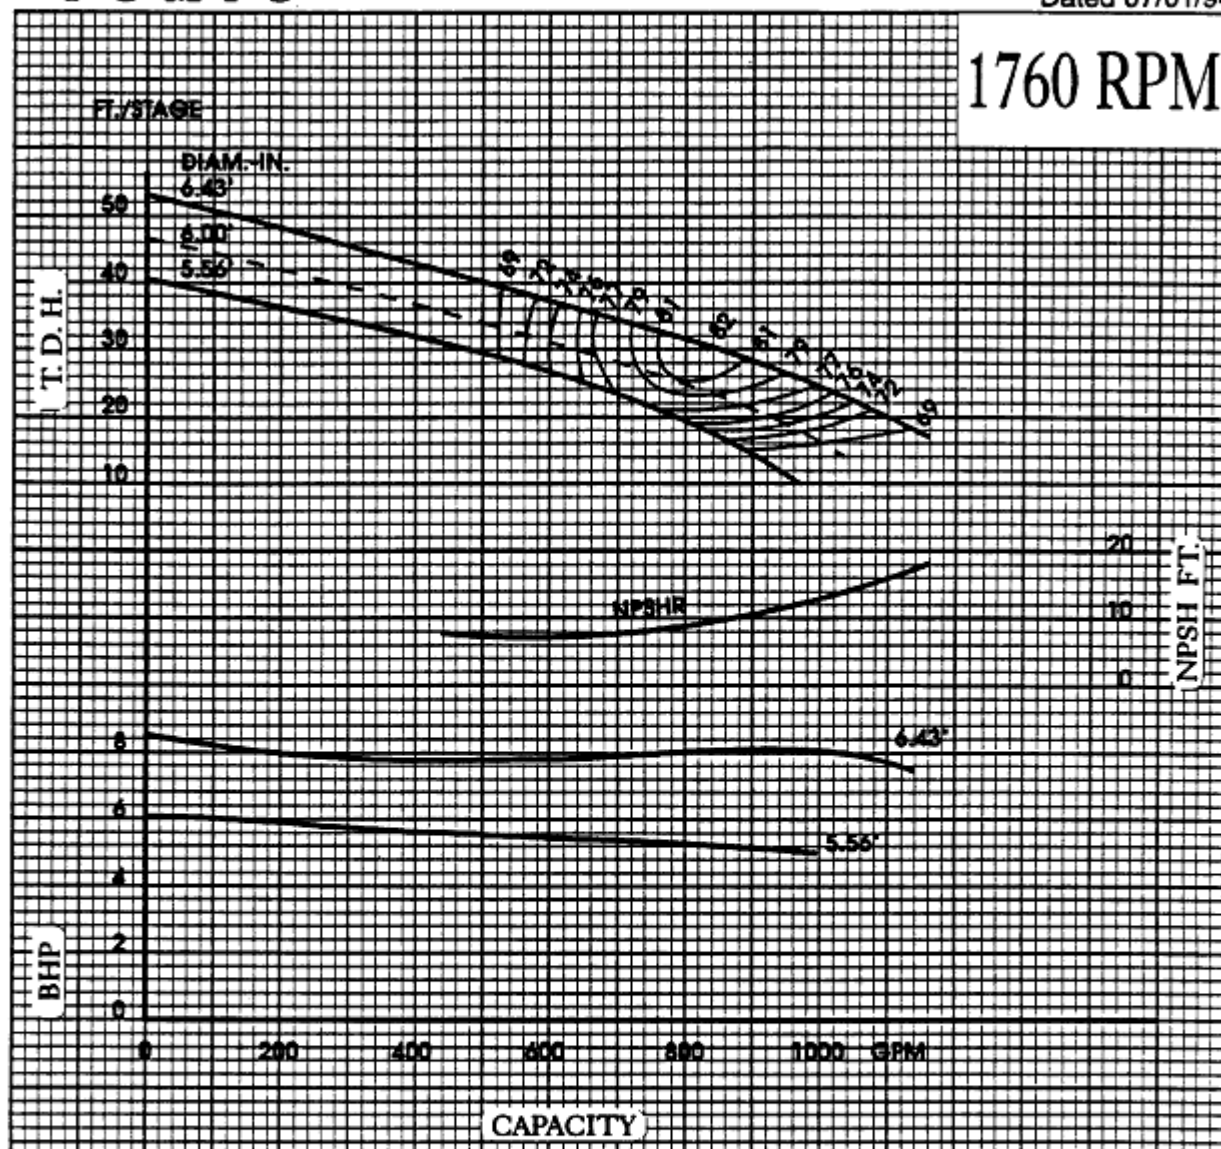

Efficiency shown is for 4 stages or more, with standard materials. For fewer stages change efficiency as shown.

No. of stages.	Eff. change	No. of stages.	Eff. change
1	-3.0	4	—
2	-1.5	5	—
3	-0.5	6	—

TECHNICAL DATA

	LBS.
Bowl wt. add stage (lbs.)	62
Rotor wt. per stage (lbs.)	17
Bowl wt. first stage (lbs.)	177
Thrust factor	9.9
Max bowl horsepower	140
Impeller eye area (sq. inch.)	22.5

CUSTOMER:

FLUID:

SP. GR.:

EFF.:

SERVICE:

CAPACITY:

VISC.:

BHP:

DATE:

T. D. H.:

NPSHA:

NPSHR: