



PUMPS


VERTICAL TURBINE PUMP

MODEL 12 A-40

VC-35

Dated 07/01/94

1760 RPM

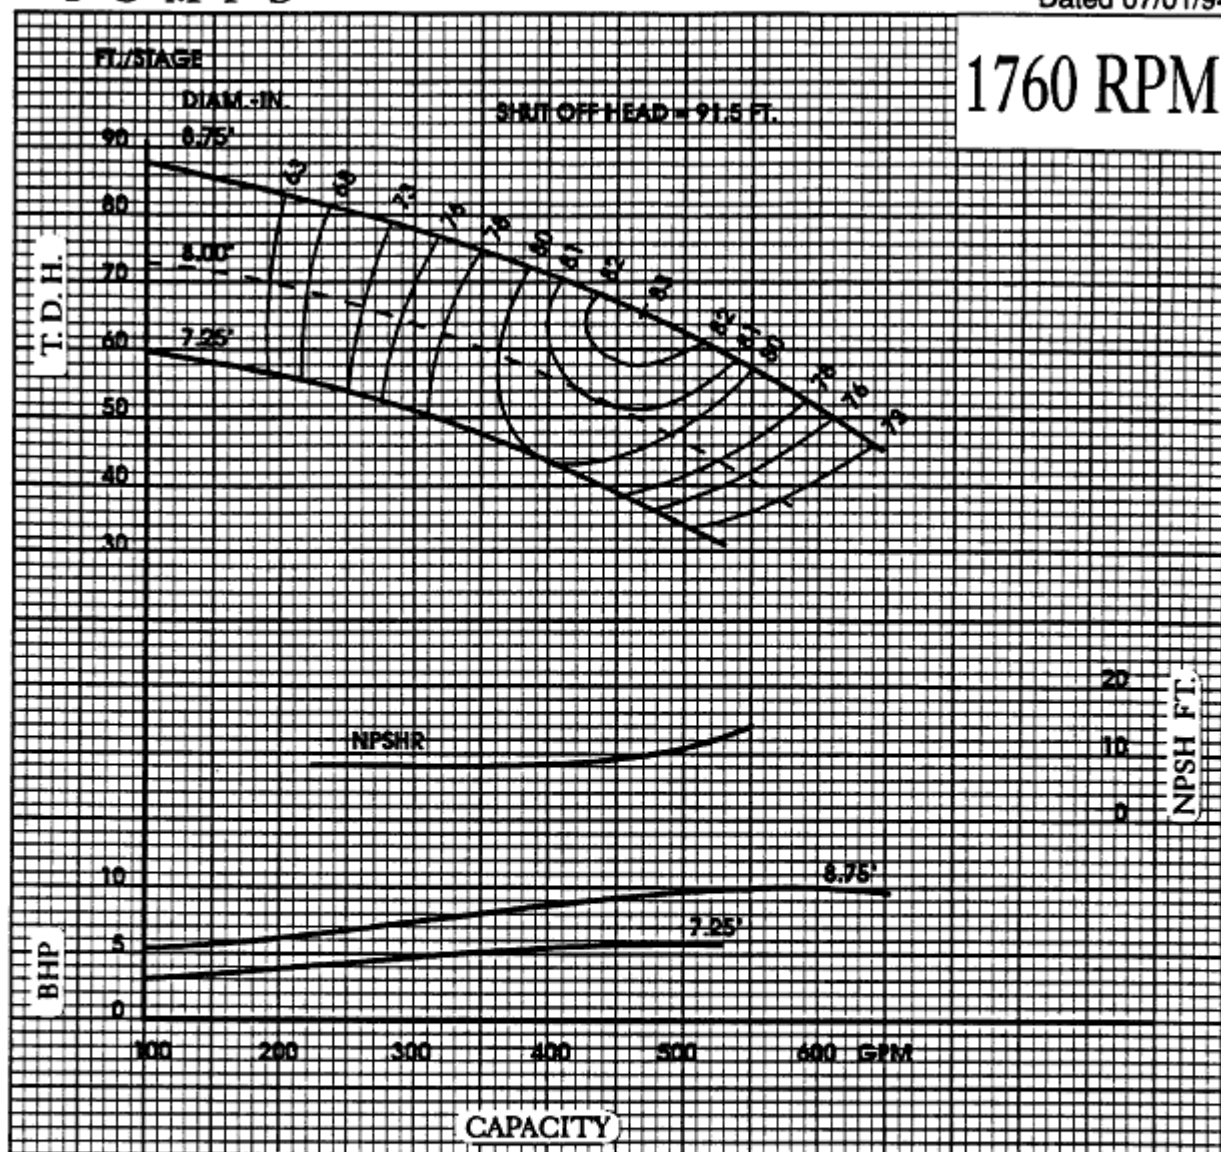

Efficiency shown is for 4 stages or more, with standard materials. For fewer stages change efficiency as shown.

No. of stages.	Eff. change	No. of stages.	Eff. change
1	- 4.0	4	—
2	- 2.0	5	—
3	- 1.0	6	—

TECHNICAL DATA

	LBS.
Bowl wt. addl stage (lbs.)	100
Rotor wt. per stage (lbs.)	25
Bowl wt. first stage (lbs.)	240
Thrust factor	7.2
Max bowl horsepower	240
Impeller eye area (sq. inch.)	11.8

CUSTOMER:

FLUID:

SP. GR.:

EFF.:

SERVICE:

CAPACITY:

VISC.:

BHP:

DATE:

T. D. H.:

NPSHA:

NPSHR: