



P U M P S


VERTICAL TURBINE PUMP

MODEL 12 B-75

VC-37

Dated 07/01/94

1760 RPM

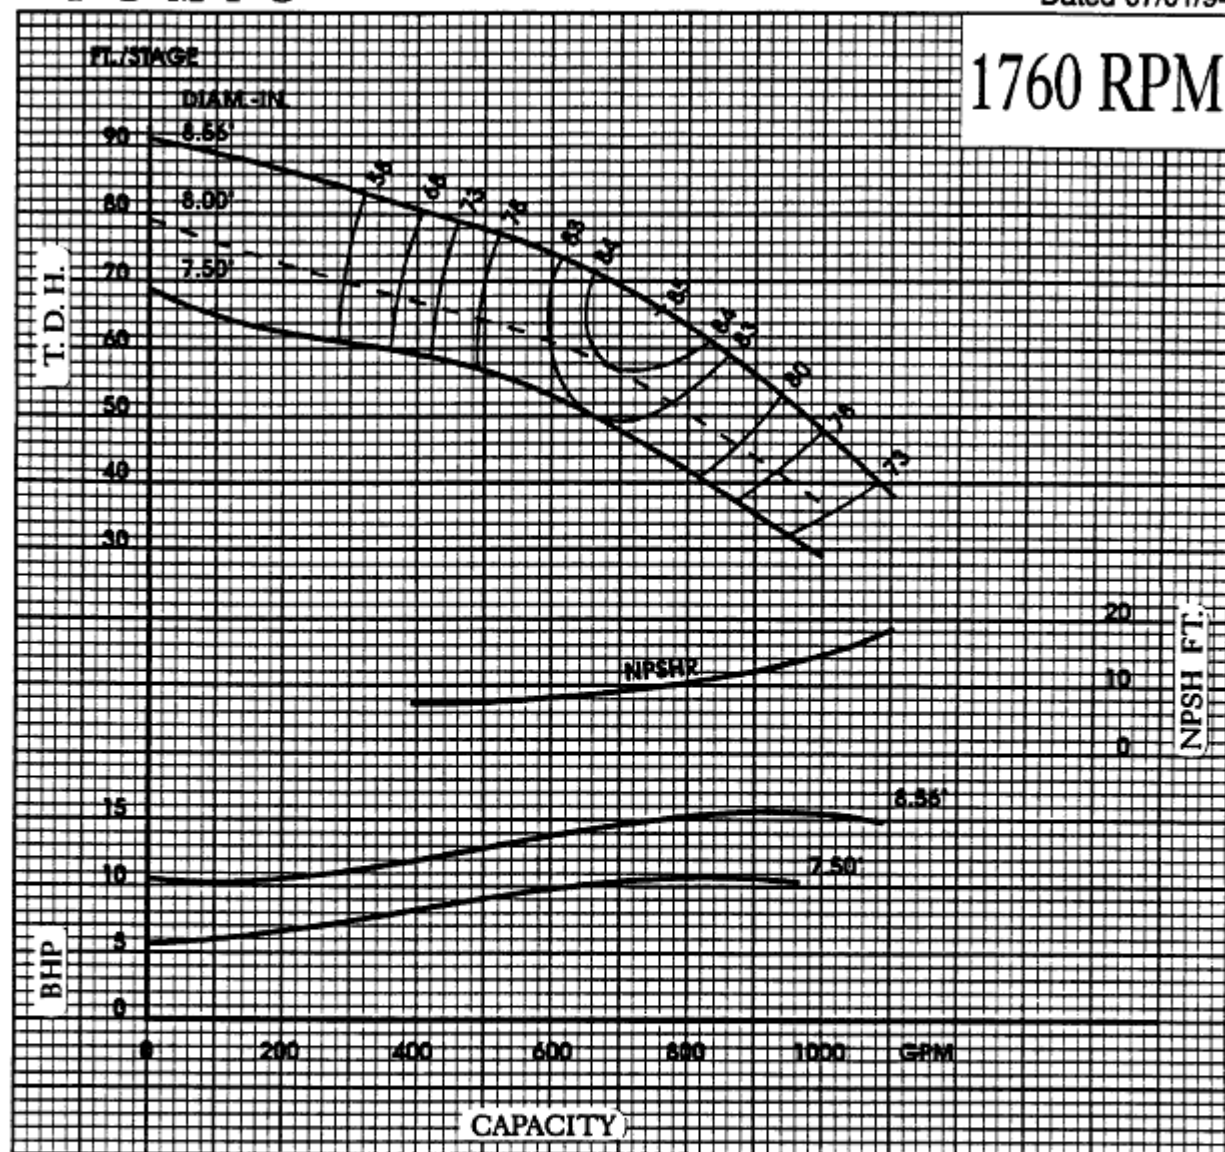

Efficiency shown is for 4 stages or more, with standard materials. For fewer stages change efficiency as shown.

No. of stages.	Eff. change	No. of stages.	Eff. change
1	- 4.0	4	_____
2	- 2.5	5	_____
3	- 1.0	6	_____

TECHNICAL DATA

	LBS.
Bowl wt. addl stage (lbs.)	92
Rotor wt. per stage (lbs.)	25
Bowl wt. first stage (lbs.)	250
Thrust factor	7.9
Max bowl horsepower	240
Impeller eye area (sq. inch.)	16.7

CUSTOMER:

FLUID:

SP. GR.:

EFF.:

SERVICE:

CAPACITY:

VISC.:

BHP:

DATE:

T. D. H.:

NPSHA:

NPSHR: