




P U M P S

VERTICAL TURBINE PUMP

MODEL 12 D-165

VC-41

Dated 07/01/94

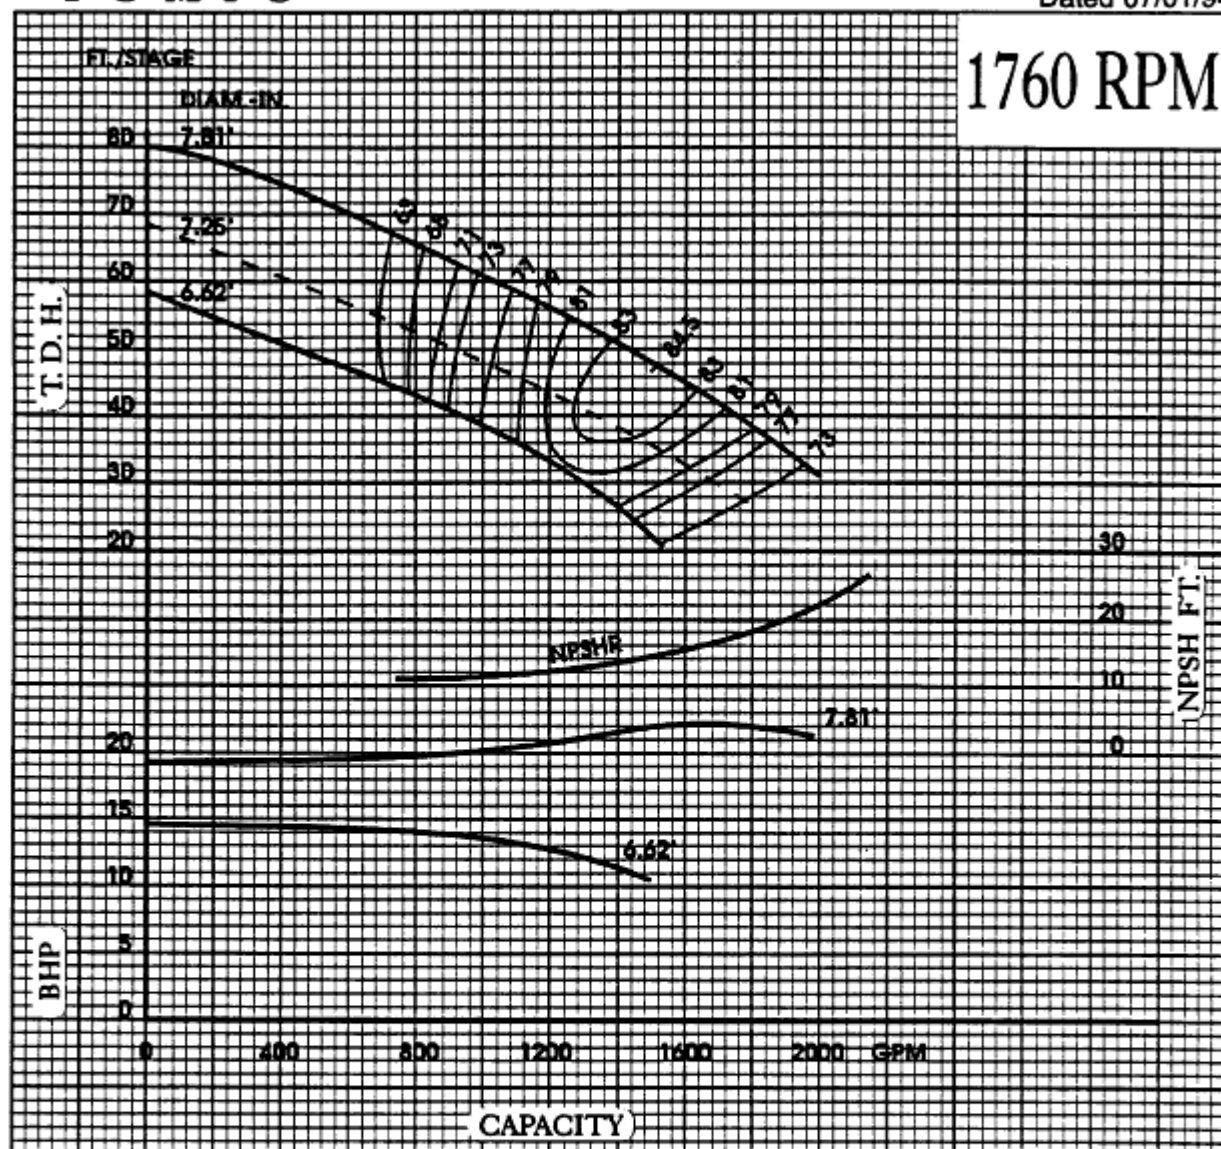

1760 RPM

Efficiency shown is for 2 stages or more, with standard materials. For fewer stages change efficiency as shown.

No. of stages.	Eff. change	No. of stages.	Eff. change
1	- 2.5	4	—
2	—	5	—
3	—	6	—

TECHNICAL DATA

	LBS.
Bowl wt. addl stage (lbs.)	101
Rotor wt. per stage (lbs.)	27
Bowl wt. first stage (lbs.)	275
Thrust factor	14.5
Max bowl horsepower	240
Impeller eye area (sq. inch.)	33.4

CUSTOMER:

FLUID:

SP. GR.:

EFF.:

SERVICE:

CAPACITY:

VISC.:

BHP:

DATE:

T. D. H.:

NPSHA:

NPSHR: