



PUMPS


VERTICAL TURBINE PUMP

MODEL 14 D-276

VC-45

Dated 07/01/94

1760 RPM

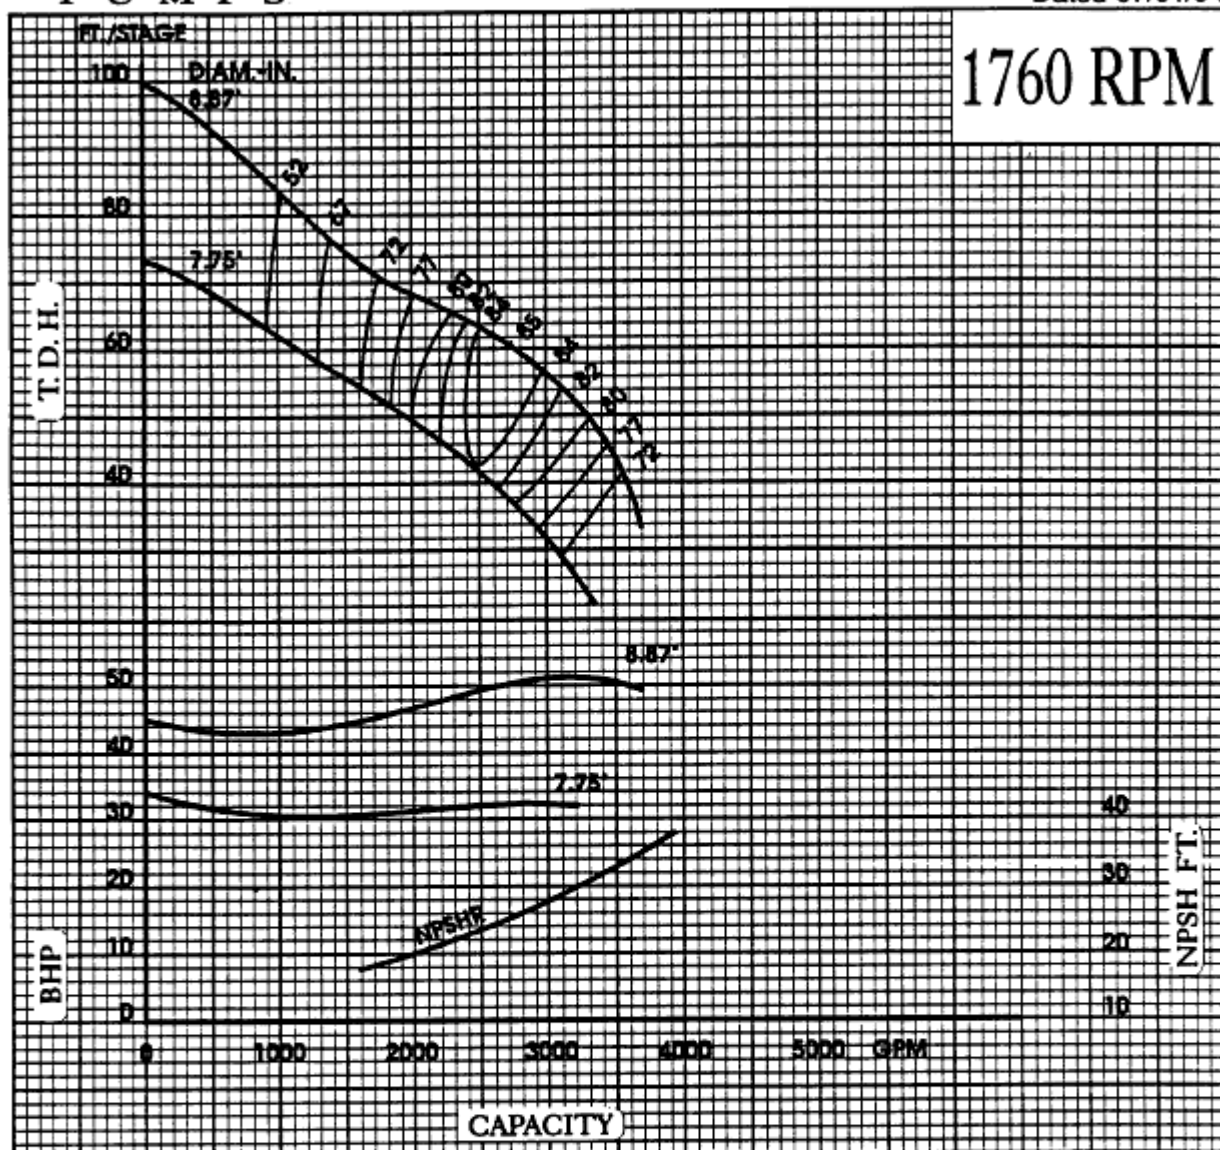

Efficiency shown is for 2 stages or more, with standard materials. For fewer stages change efficiency as shown.

No. of stages.	Eff. change	No. of stages.	Eff. change
1	-2	4	—
2	—	5	—
3	—	6	—

TECHNICAL DATA

	LBS.
Bowl wt. addl stage (lbs.)	135
Rotor wt. per stage (lbs.)	35
Bowl wt. first stage (lbs.)	305
Thrust factor	21
Max bowl horsepower	140
Impeller eye area (sq. inch.)	45

CUSTOMER:

FLUID:

SP. GR.:

EFF.:

SERVICE:

CAPACITY:

VISC.:

BHP:

DATE:

T. D. H.:

NPSHA:

NPSHR: