




VERTICAL TURBINE PUMP

MODEL 15 C-226

VC-46

Dated 07/01/94

1760 RPM

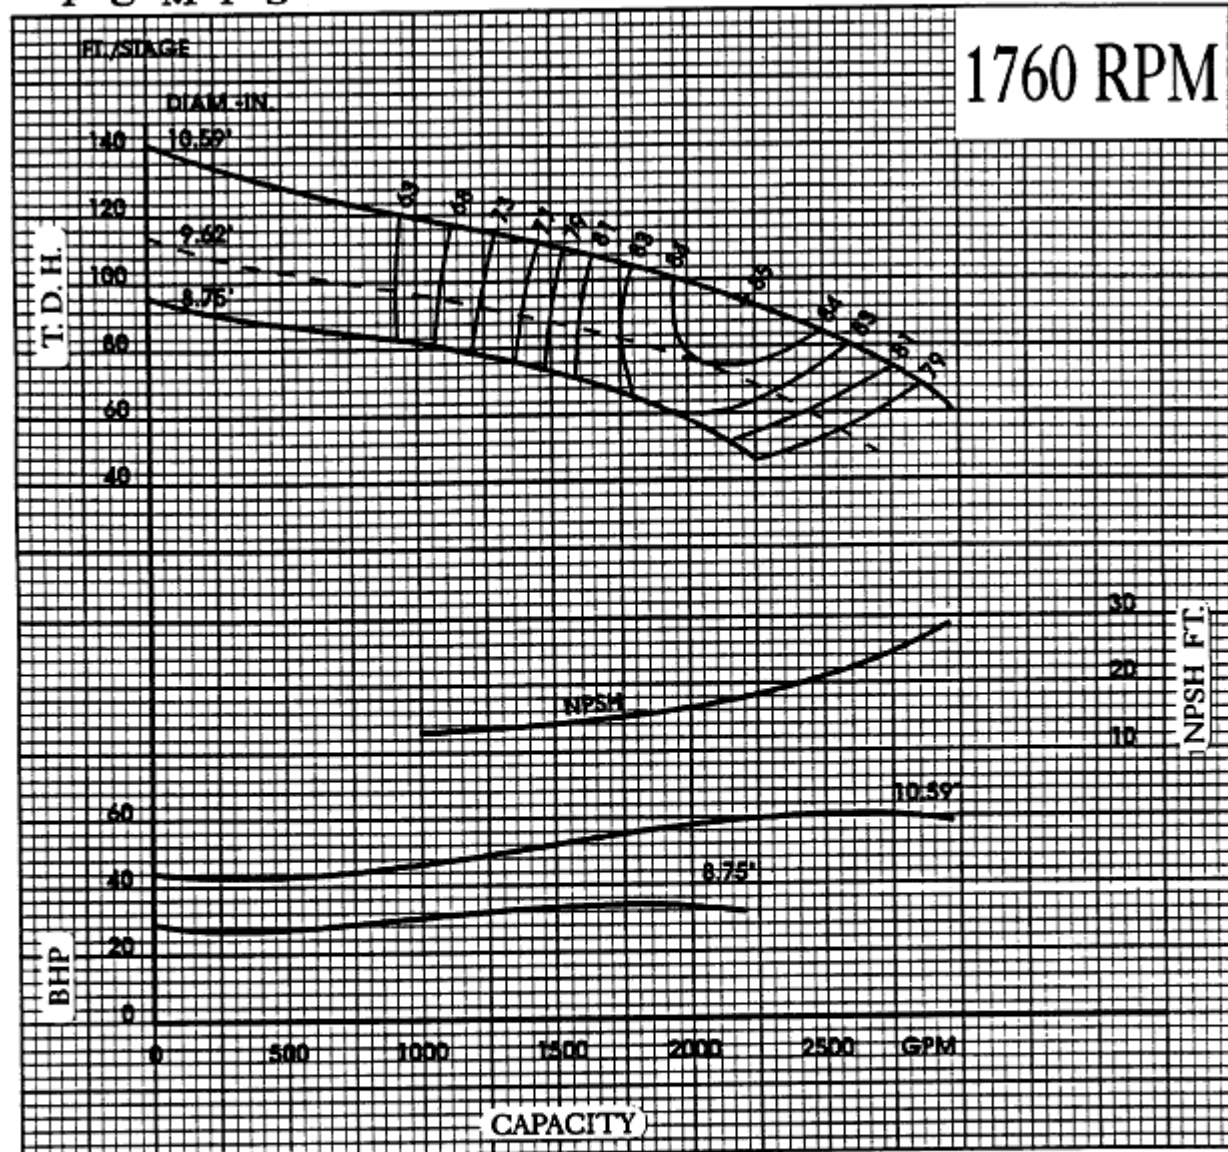

Efficiency shown is for 4 stages or more, with standard materials. For fewer stages change efficiency as shown.

No. of stages.	Eff. change	No. of stages.	Eff. change
1	- 3.0	4	_____
2	- 1.5	5	_____
3	- 0.5	6	_____

TECHNICAL DATA

	LBS.
Bowl wt. addl stage (lbs.)	186
Rotor wt. per stage (lbs.)	58
Bowl wt. first stage (lbs.)	457
Thrust factor	15.7
Max bowl horsepower	570
Impeller eye area (sq. inch.)	34.2

CUSTOMER:

FLUID:

SP. GR.:

EFF.:

SERVICE:

CAPACITY:

VISC.:

BHP:

DATE:

T. D. H.:

NPSHA:

NPSHR: