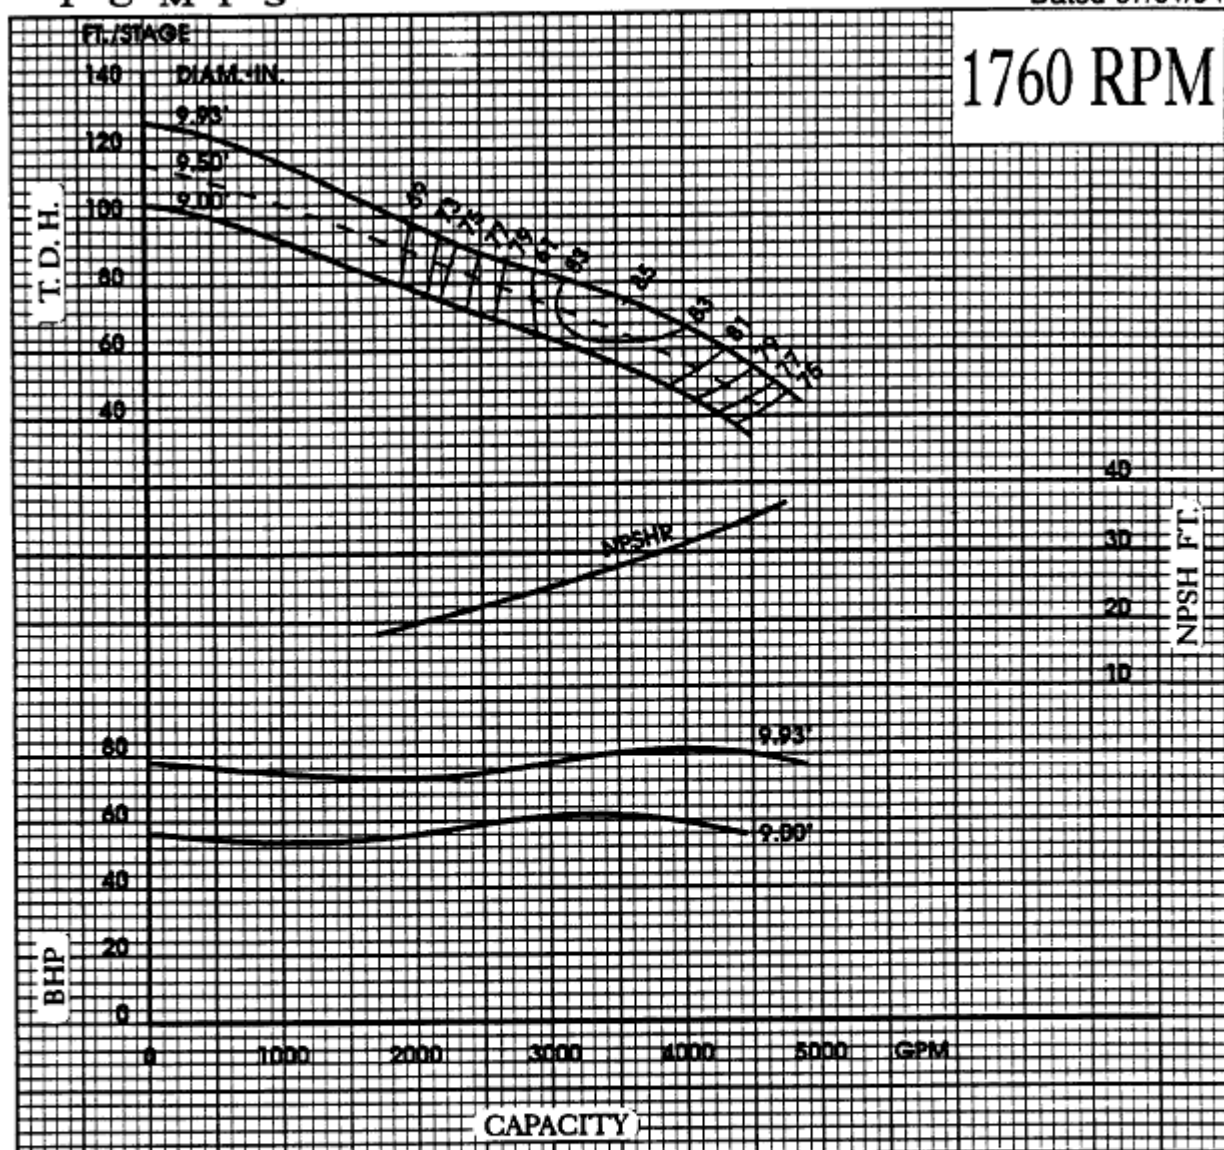


WDM**PUMPS****VERTICAL TURBINE PUMP****MODEL 15 D-410**

VC-49

Dated 07/01/94

1760 RPM

Efficiency shown is for 2 stages or more, with standard materials. For fewer stages change efficiency as shown.

No. of stages.	Eff. change	No. of stages.	Eff. change
1	- 2.0	4	—
2	—	5	—
3	—	6	—

TECHNICAL DATA

	LBS.
Bowl wt. addl stage (lbs.)	180
Rotor wt. per stage (lbs.)	45
Bowl wt. first stage (lbs.)	415
Thrust factor	25.4
Max bowl horsepower	570
Impeller eye area (sq. Inch.)	53.5

CUSTOMER:

FLUID:

SP. GR.:

EFF.:

SERVICE:

CAPACITY:

VISC.:

BHP:

DATE:

T. D. H.:

NPSHA:

NPSHR: