



PUMPS


VERTICAL TURBINE PUMP

MODEL 24 B-440

VC-51

Dated 05/01/95

1775 RPM

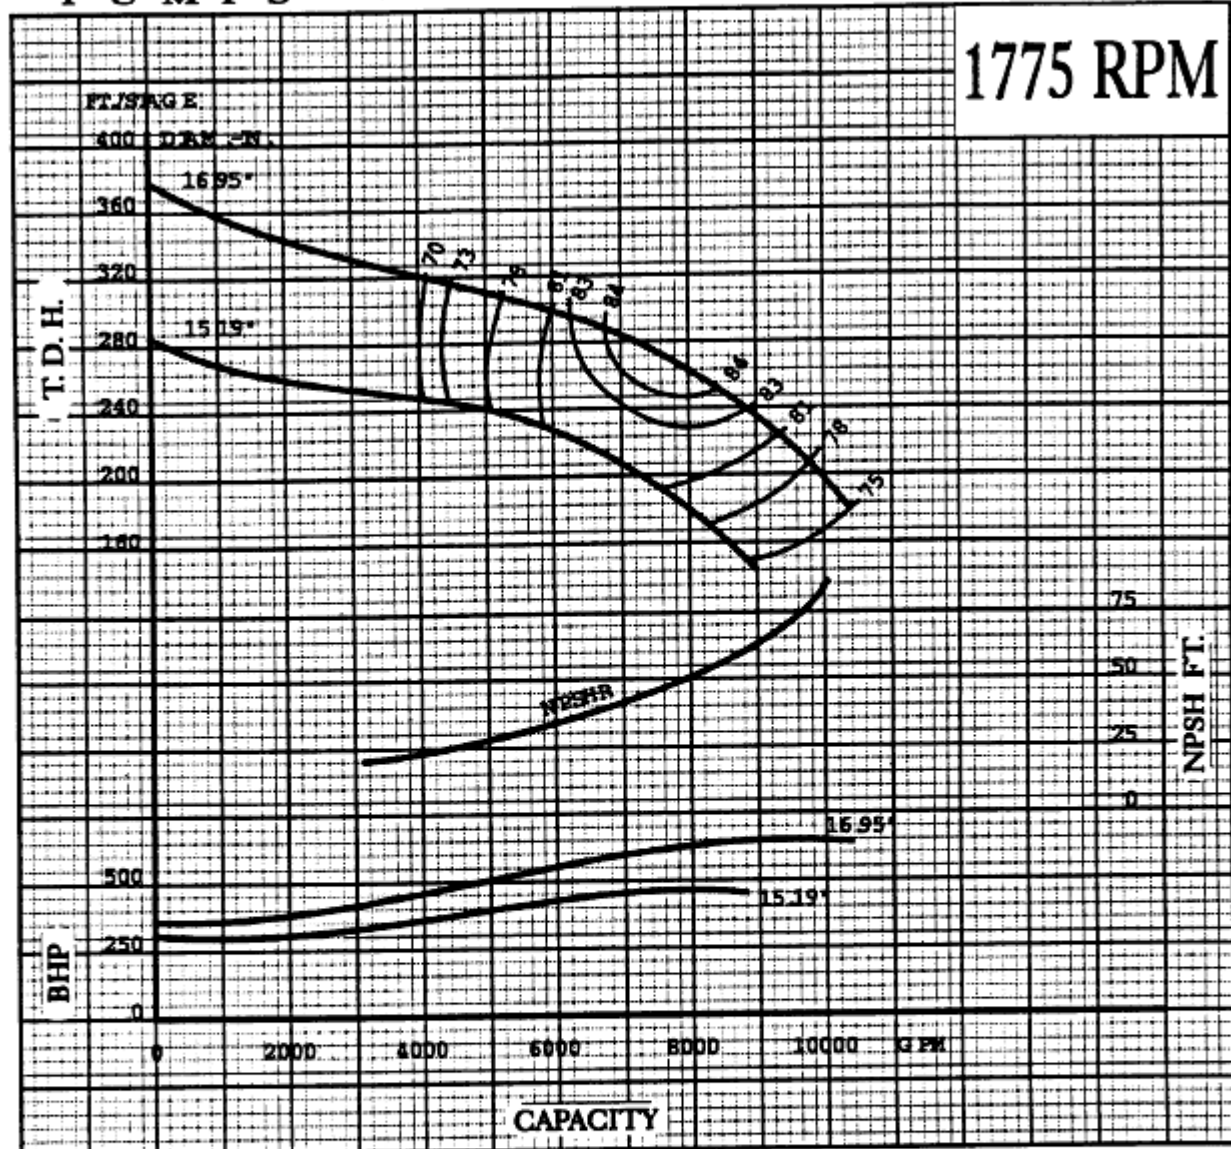

Efficiency shown for 1 stages only, with standard material. For other stages change efficiency as shown.

No. of stages	Eff. change	No. of stages	Eff. change
1	—	4	—
2	0.5	5	—
3	0.5	6	—

TECHNICAL DATA

	lbs.
Bowl wt. addl. stage (ba.)	610
Rotor wt. per stage (ba.)	150
Bowl wt. 1st stage (ba.)	1220
Thrust factor	43
Max bowl horsepower	
Impeller eye area (sq. in.)	91

CUSTOMER:

FLUID:

SP. GR.:

EFF.:

SERVICE:

CAPACITY:

VELOCITY:

BHP:

DATE:

T.D.H.:

NPSHA:

NPSHR: