



PUMPS


VERTICAL TURBINE PUMP

MODEL 8 B-23

VC-23

Dated 07/01/94

1760 RPM

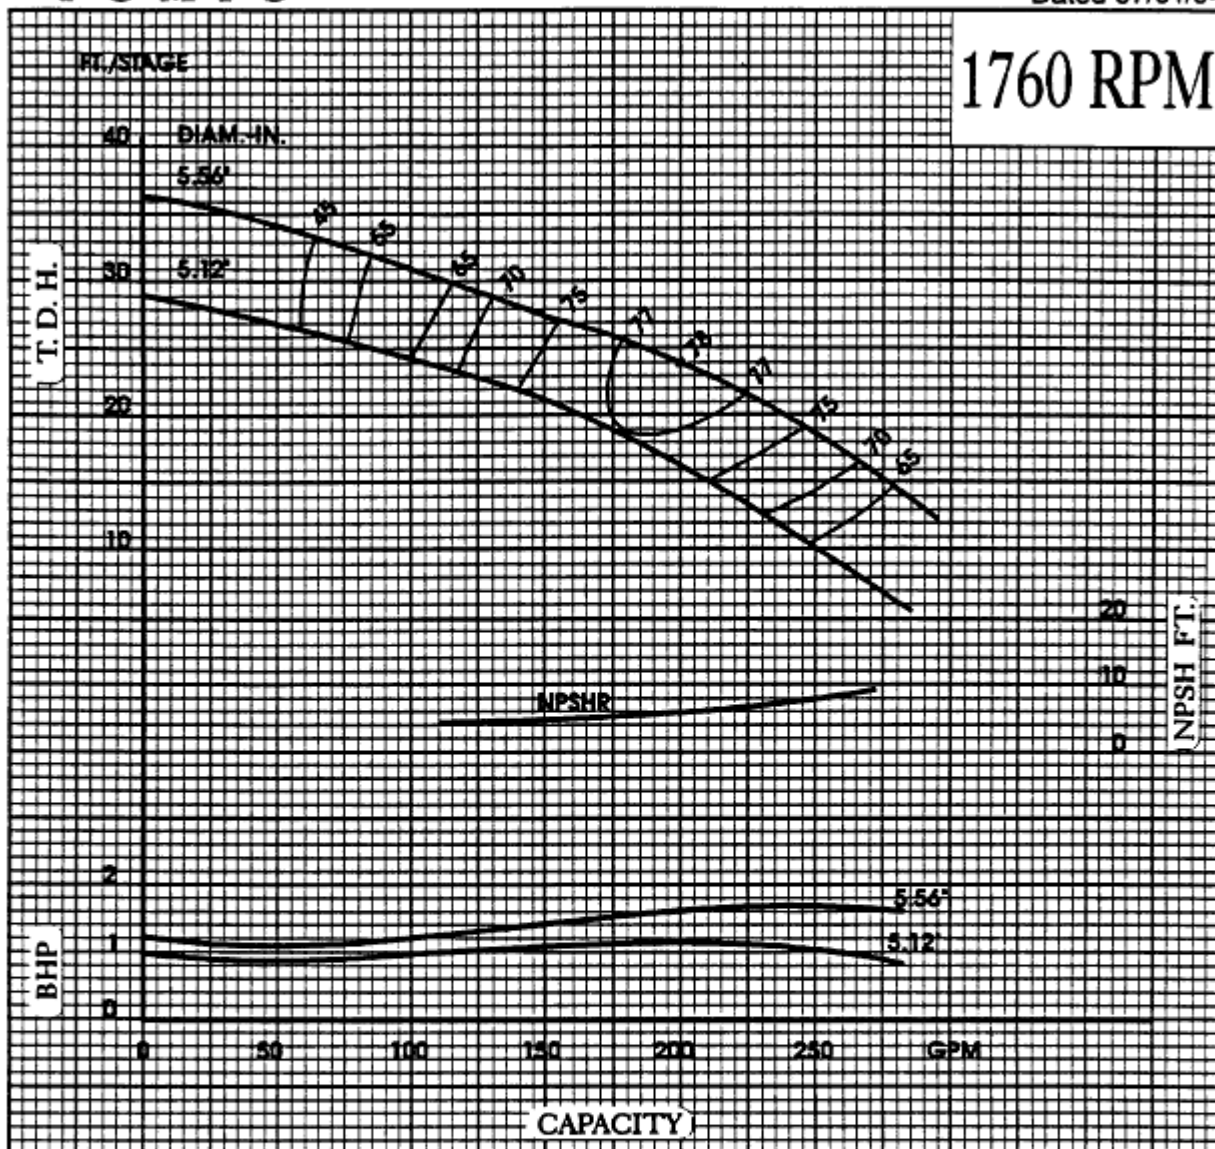

Efficiency shown is for 6 stages or more, with standard materials. For fewer stages change efficiency as shown.

No. of stages.	Eff. change	No. of stages.	Eff. change
1	- 4.0	4	- 1.0
2	- 2.5	5	- 0.5
3	- 1.5	6	—

TECHNICAL DATA

	LBS.
Bowl wt. add stage (lbs.)	30
Rotor wt. per stage (lbs.)	7
Bowl wt. first stage (lbs.)	85
Thrust factor	4.3
Max bowl horsepower	80
Impeller eye area (sq. inch.)	7.7

CUSTOMER:

FLUID:

SP. GR.:

EFF.:

SERVICE:

CAPACITY:

VISC.:

BHP:

DATE:

T. D. H.:

NPSHA:

NPSHR: