



PUMPS


VERTICAL TURBINE PUMP

MODEL 8 C-48

VC-26

Dated 07/01/94

1760 RPM

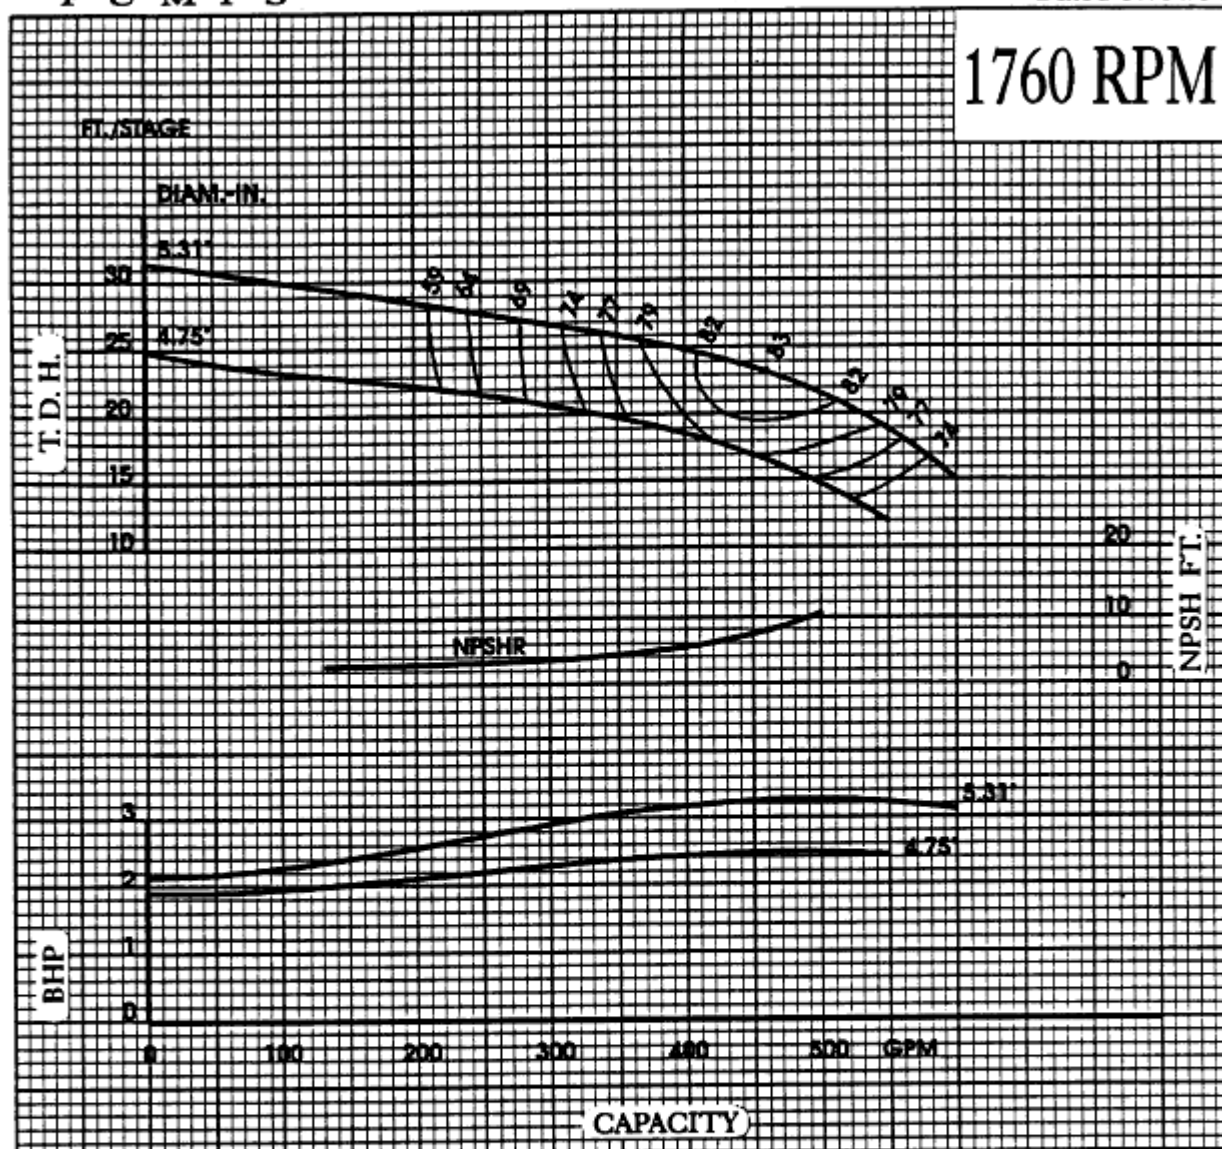

Efficiency shown is for 7 stages or more, with standard materials. For fewer stages change efficiency as shown.

No. of stages.	Eff. change	No. of stages.	Eff. change
1	-4.0	4	-2.0
2	-3.0	5	-1.5
3	-2.5	6	-1.0

TECHNICAL DATA

	LBS.
Bowl wt. addl stage (lbs.)	35
Rotor wt. per stage (lbs.)	7
Bowl wt. first stage (lbs.)	117
Thrust factor	6.1
Max bowl horsepower	80
Impeller eye area (sq. inch.)	12.2

CUSTOMER:

FLUID:

SP. GR.:

EFF.:

SERVICE:

CAPACITY:

VISC.:

BHP:

DATE:

T. D. H.:

NPSHA:

NPSHR: