




VERTICAL TURBINE PUMP

MODEL 10 A-22

VC-11

Dated 07/01/94

3520 RPM

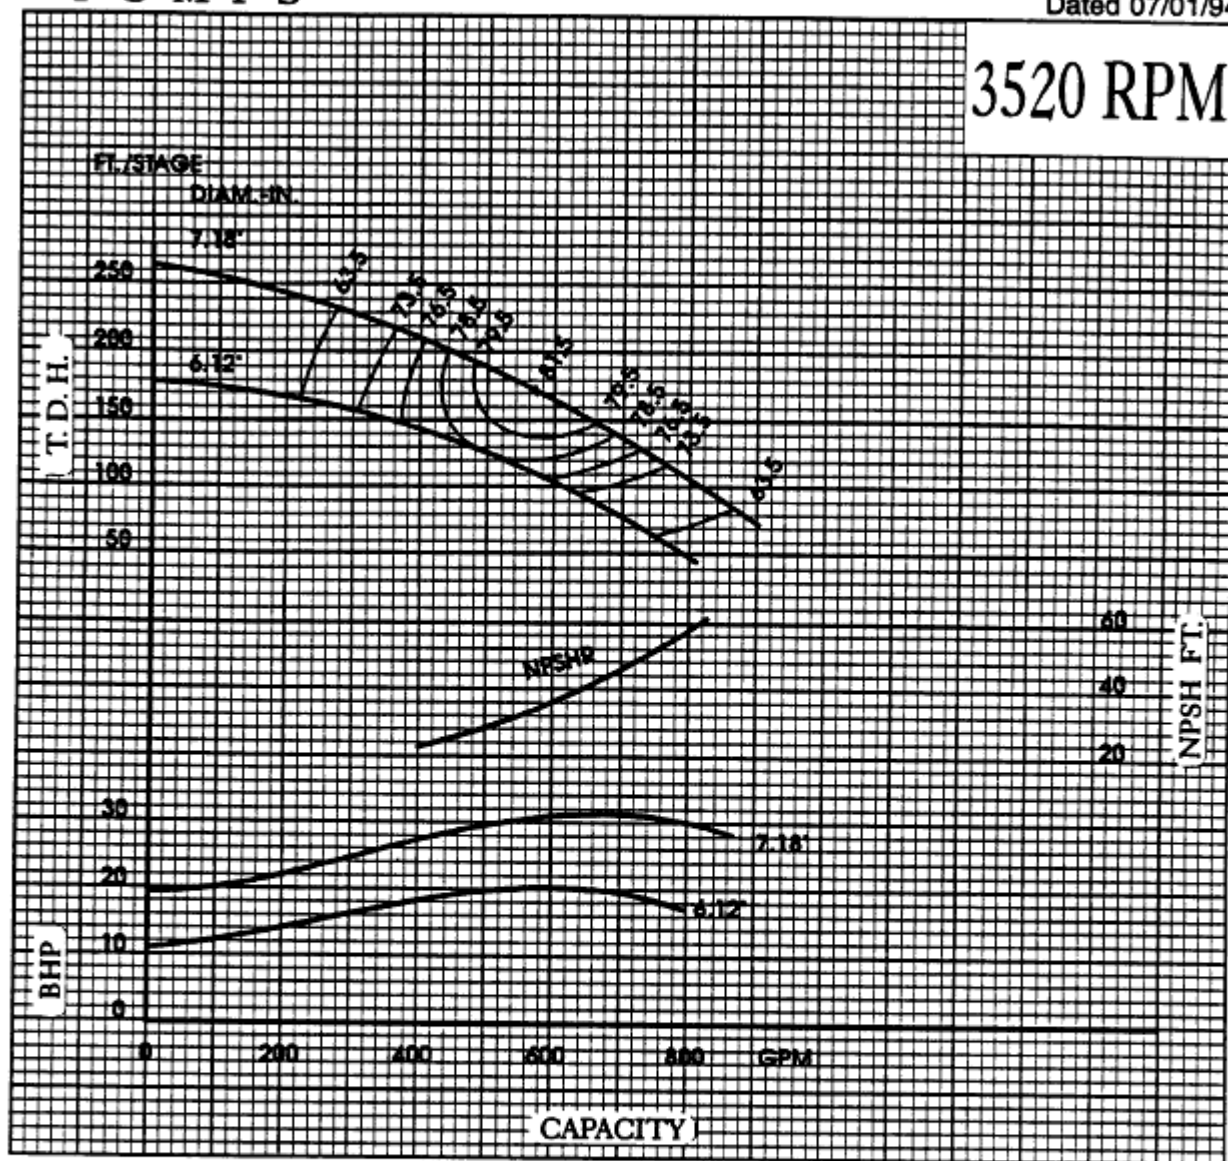

Efficiency shown is for 4 stages or more, with standard materials. For fewer stages change efficiency as shown.

No. of stages.	Eff. change	No. of stages.	Eff. change
1	- 3.0	4	—
2	- 2.0	5	—
3	- 1.0	6	—

TECHNICAL DATA

Bowl wt. addl stage (lbs.)
 Rotor wt. per stage (lbs.)
 Bowl wt. first stage (lbs.)
 Thrust factor
 Max bowl horsepower
 Impeller eye area (sq. inch.)

LBS.

57
 14
 163
 4
 280
 7.8

CUSTOMER:

FLUID:

SP. GR.:

EFF.:

SERVICE:

CAPACITY:

VISC.:

BHP:

DATE:

T. D. H.:

NPSHA:

NPSHR: