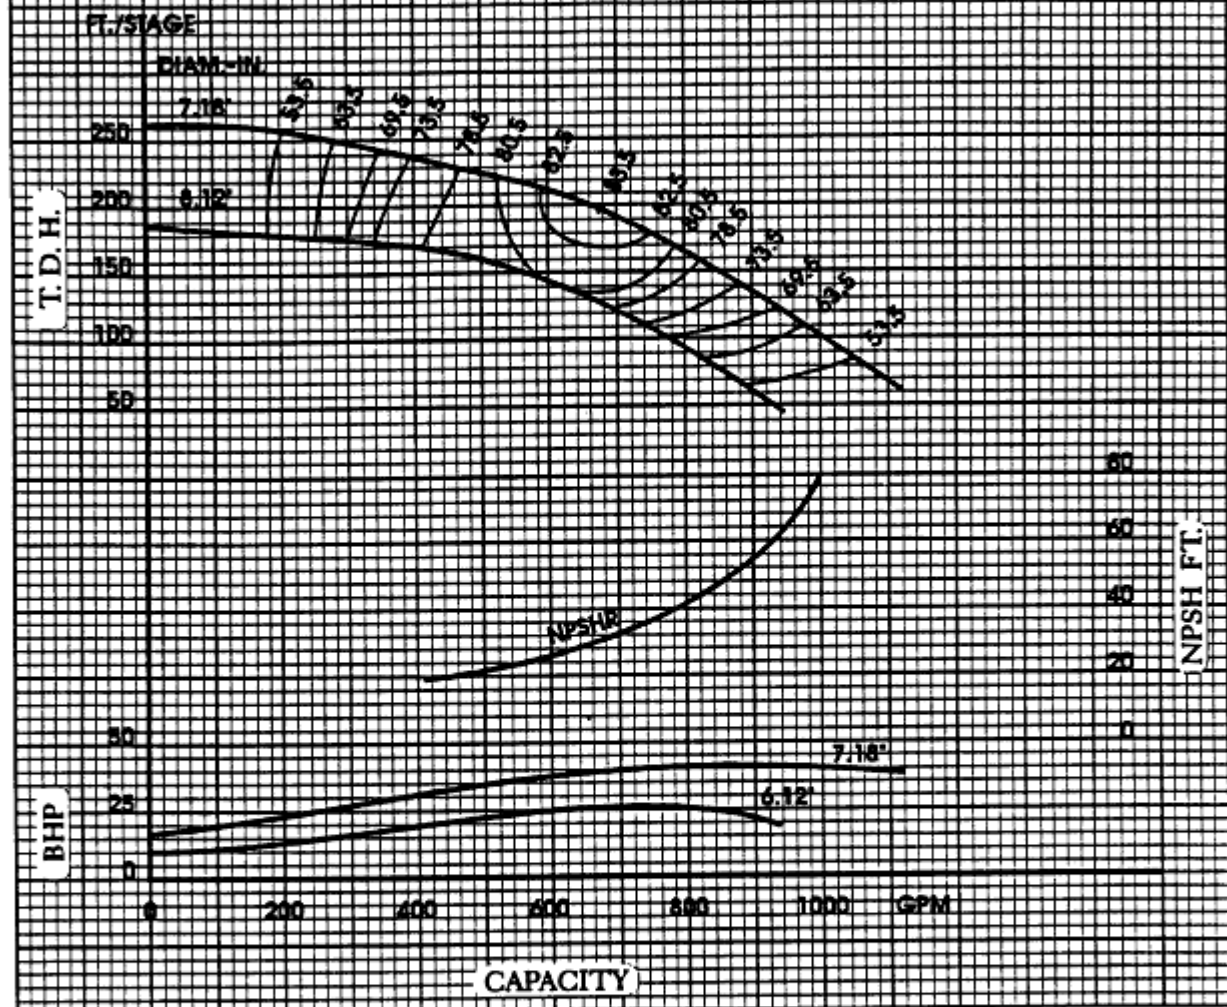


3520 RPM


Efficiency shown is for 4 stages or more, with standard materials. For fewer stages change efficiency as shown.

No. of stages.	Eff. change	No. of stages.	Eff. change
1	-3.0	4	—
2	-2.0	5	—
3	-1.0	6	—

TECHNICAL DATA

	LBS.
Bowl wt. add stage (lbs.)	57
Rotor wt. per stage (lbs.)	14
Bowl wt. first stage (lbs.)	163
Thrust factor	4
Max bowl horsepower	280
Impeller eye area (sq. inch.)	7.8

CUSTOMER:
FLUID:
SP. GR.:
EFF.:
SERVICE:
CAPACITY:
VISC.:
BHP:
DATE:
T. D. H.:
NPSHA:
NPSHR: