



PUMPS


VERTICAL TURBINE PUMP

MODEL 6 A-6

VC-2

Dated 07/01/94

3520 RPM

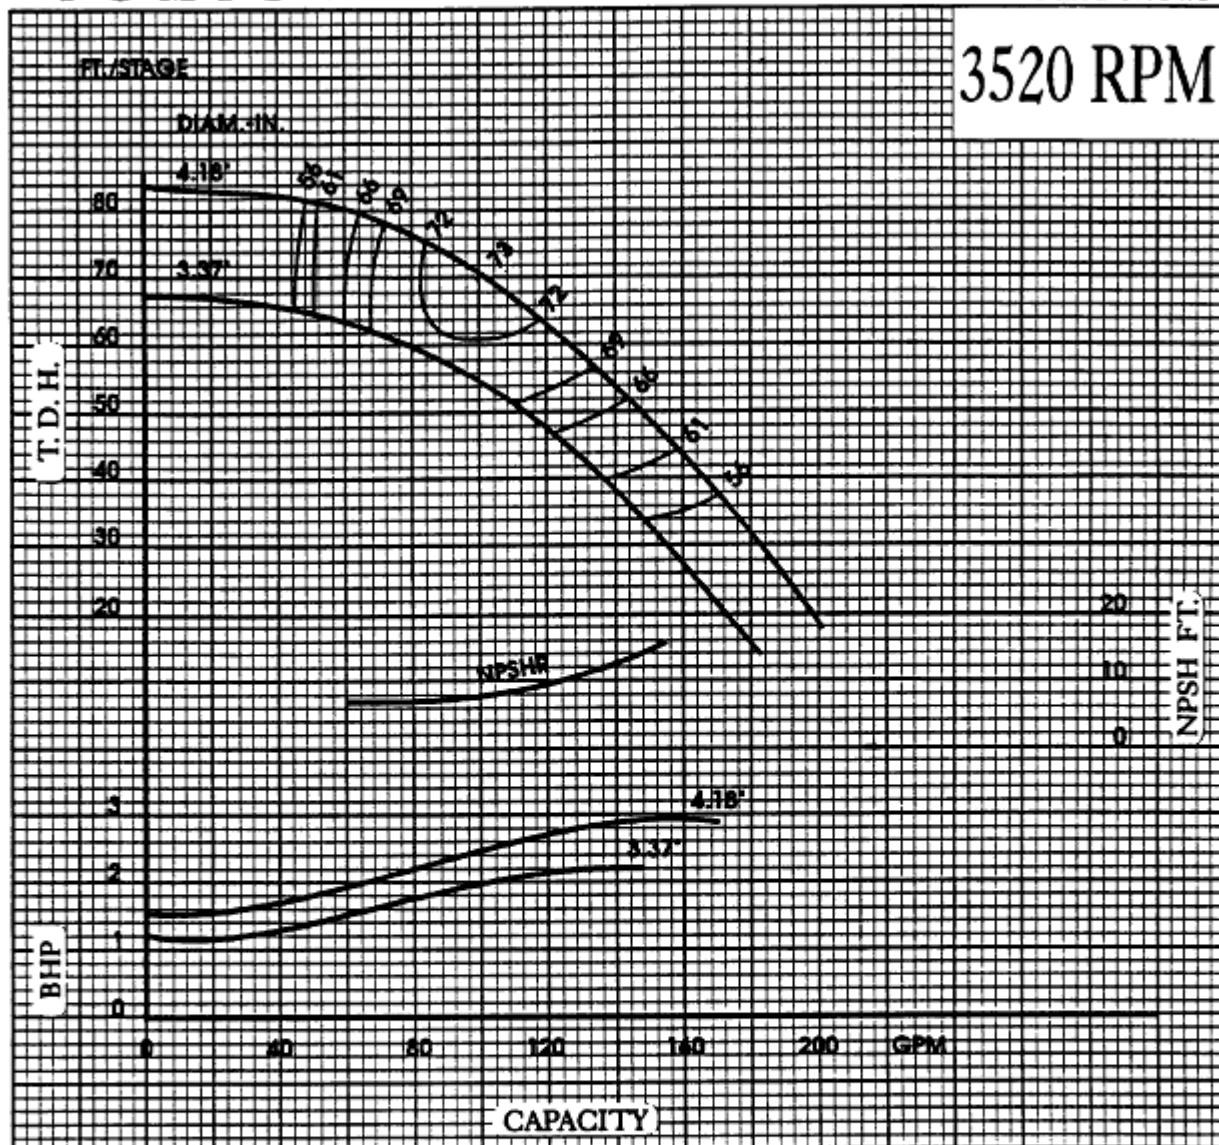

Efficiency shown is for 4 stages or more, with standard materials. For fewer stages change efficiency as shown.

No. of stages.	Eff. change	No. of stages.	Eff. change
1	- 6.0	4	_____
2	- 3.5	5	_____
3	- 1.5	6	_____

TECHNICAL DATA

	LBS.
Bowl wt. addl stage (lbs.)	16
Rotor wt. per stage (lbs.)	4
Bowl wt. first stage (lbs.)	47
Thrust factor	1.75
Max bowl horsepower	80
Impeller eye area (sq. inch.)	2.6

CUSTOMER:

FLUID:

SP. GR.:

EFF.:

SERVICE:

CAPACITY:

VISC.:

BHP:

DATE:

T. D. H.:

NPSHA:

NPSHR: