



PUMPS


VERTICAL TURBINE PUMP

MODEL 6 C-18

VC-6

Dated 07/01/94

3520 RPM

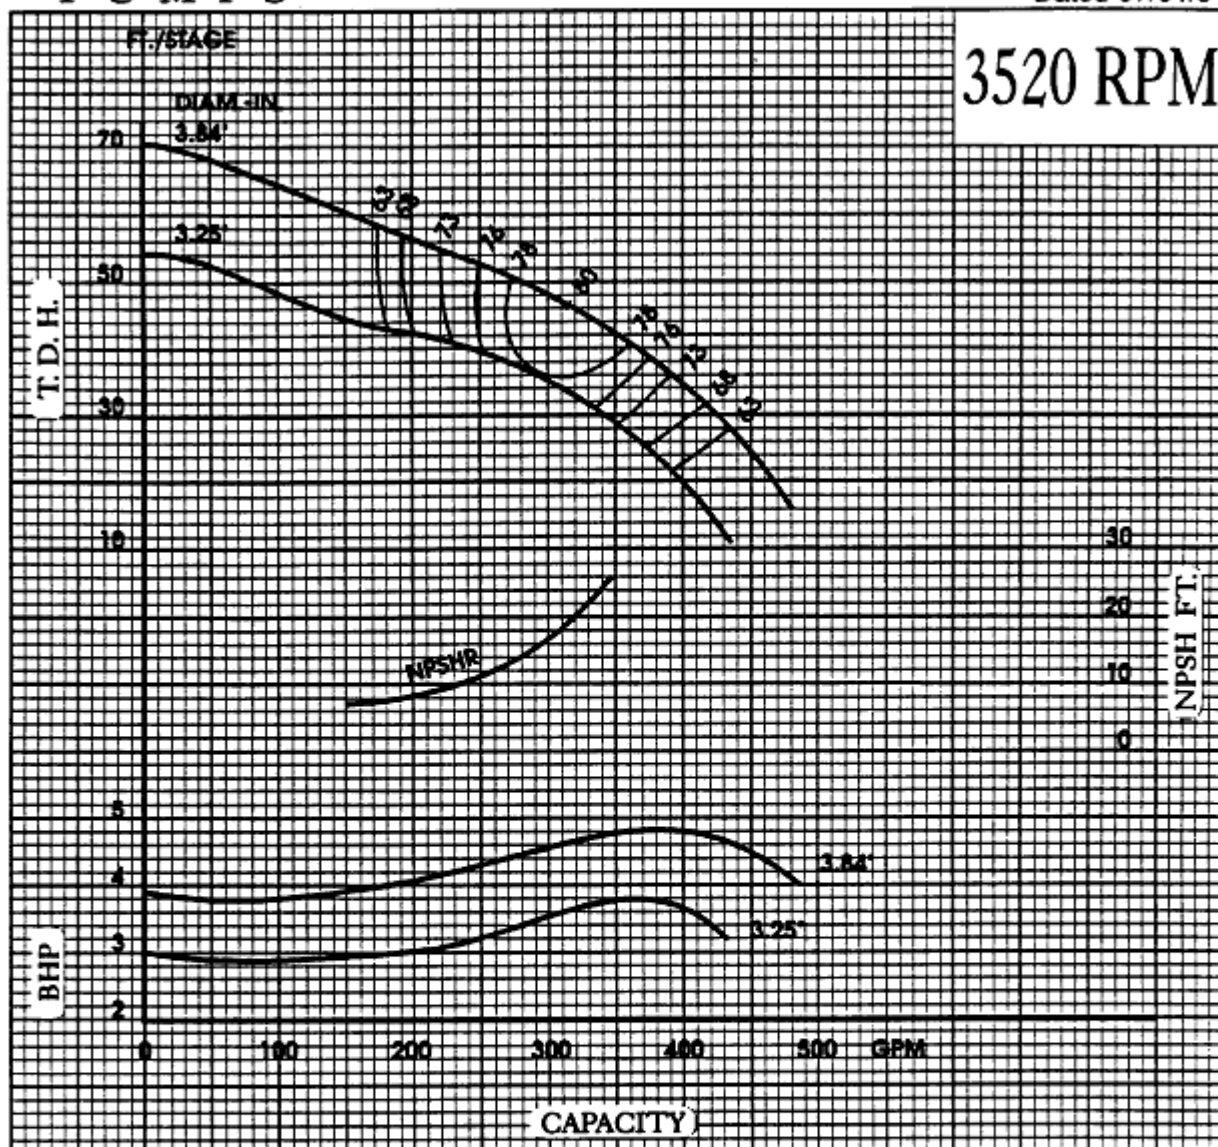

Efficiency shown is for 4 stages or more, with standard materials. For fewer stages change efficiency as shown.

No. of stages.	Eff. change	No. of stages.	Eff. change
1	- 6.0	4	—
2	- 3.5	5	—
3	- 1.5	6	—

TECHNICAL DATA

	LBS.
Bowl wt. add stage (lbs.)	17
Rotor wt. per stage (lbs.)	5
Bowl wt. first stage (lbs.)	53
Thrust factor	3.4
Max bowl horsepower	80
Impeller eye area (sq. inch.)	6.3

CUSTOMER:

FLUID:

SP. GR.:

EFF.:

SERVICE:

CAPACITY:

VISC.:

BHP:

DATE:

T. D. H.:

NPSHA:

NPSHR: