



VERTICAL TURBINE PUMP


MODEL 8 B-23

VC-9

Dated 07/01/94

PUMPS

3520 RPM

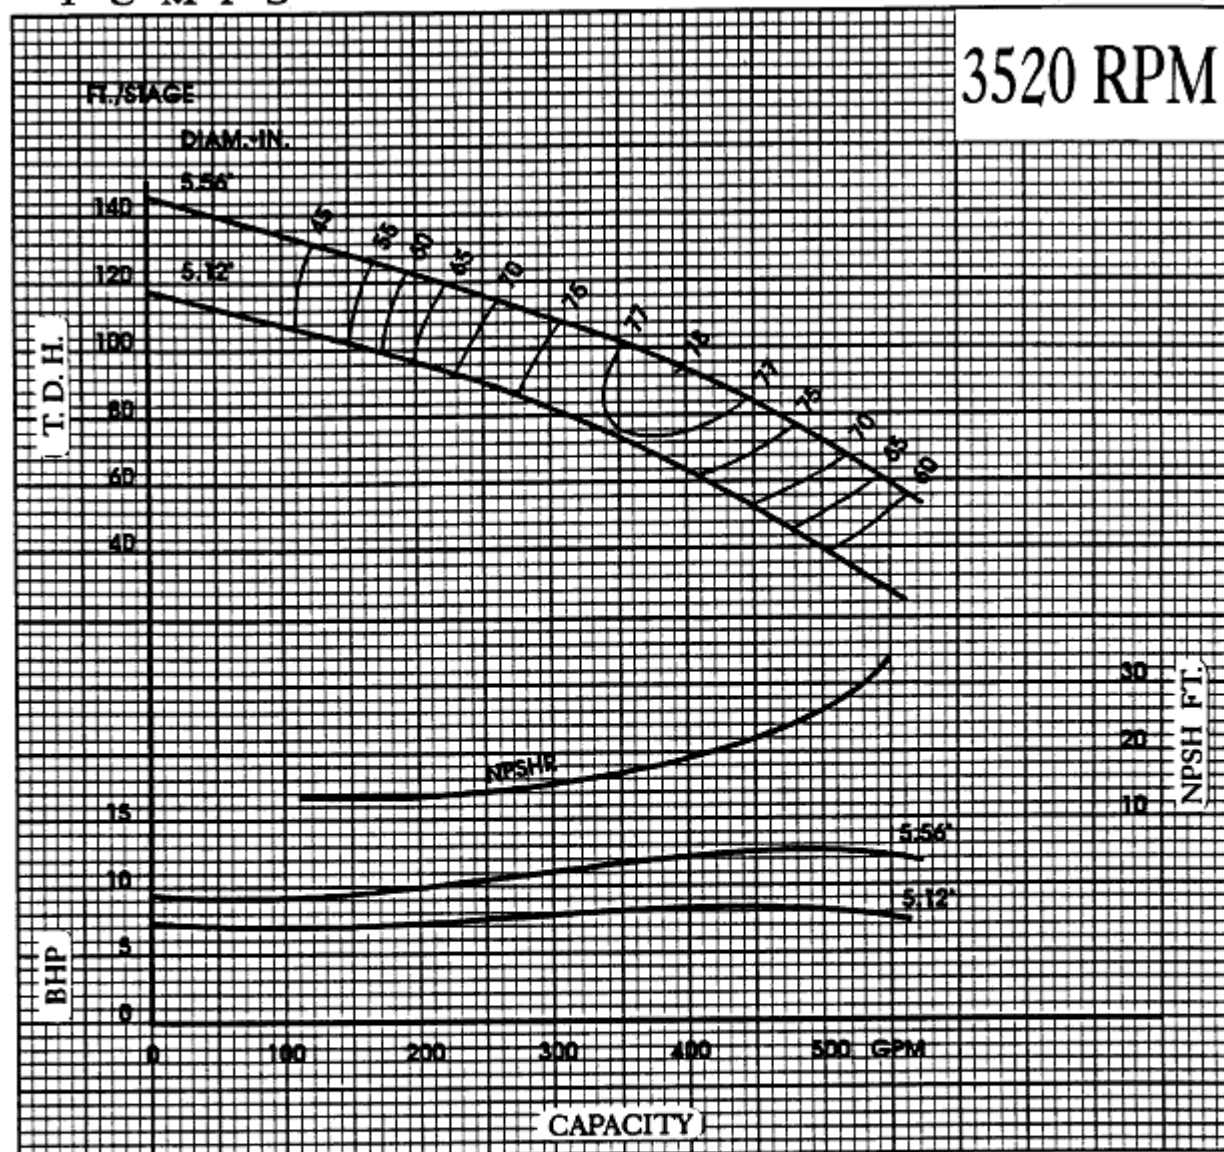

Efficiency shown is for 6 stages or more, with standard materials. For fewer stages change efficiency as shown.

No. of stages.	Eff. change	No. of stages.	Eff. change
1	-4.0	4	—
2	-2.5	5	—
3	-1.0	6	—

TECHNICAL DATA

Bowl wt. addl stage (lbs.)
 Rotor wt. per stage (lbs.)
 Bowl wt. first stage (lbs.)
 Thrust factor
 Max bowl horsepower
 Impeller eye area (sq. inch.)

LBS.

30
 7
 85
 4.3
 160
 7.7

CUSTOMER:

FLUID:

SP. GR.:

EFF.:

SERVICE:

CAPACITY:

VISC.:

BHP:

DATE:

T. D. H.:

NPSHA:

NPSHR: