

BOWL HYDRAULIC PERFORMANCE BASED ON STANDARD MATERIALS OF CONSTRUCTION AND HANDLING CLEAR, FRESH, NONAERATED WATER FREE OF FOREIGN MATERIALS.

CHANGE IN EFFICIENCY


NO. OF STAGES	NO. OF POINTS
1	-3
2	-1
3	0

WESTERN LAND ROLLER™

10C BOWL
M-BH IMPELLER
1760 R.P.M.

FOR LINED BOWLS, MULTIPLY HEAD AND EFFICIENCY BY 1.015

IMPELLER DIAMETER = 7.06 INCHES

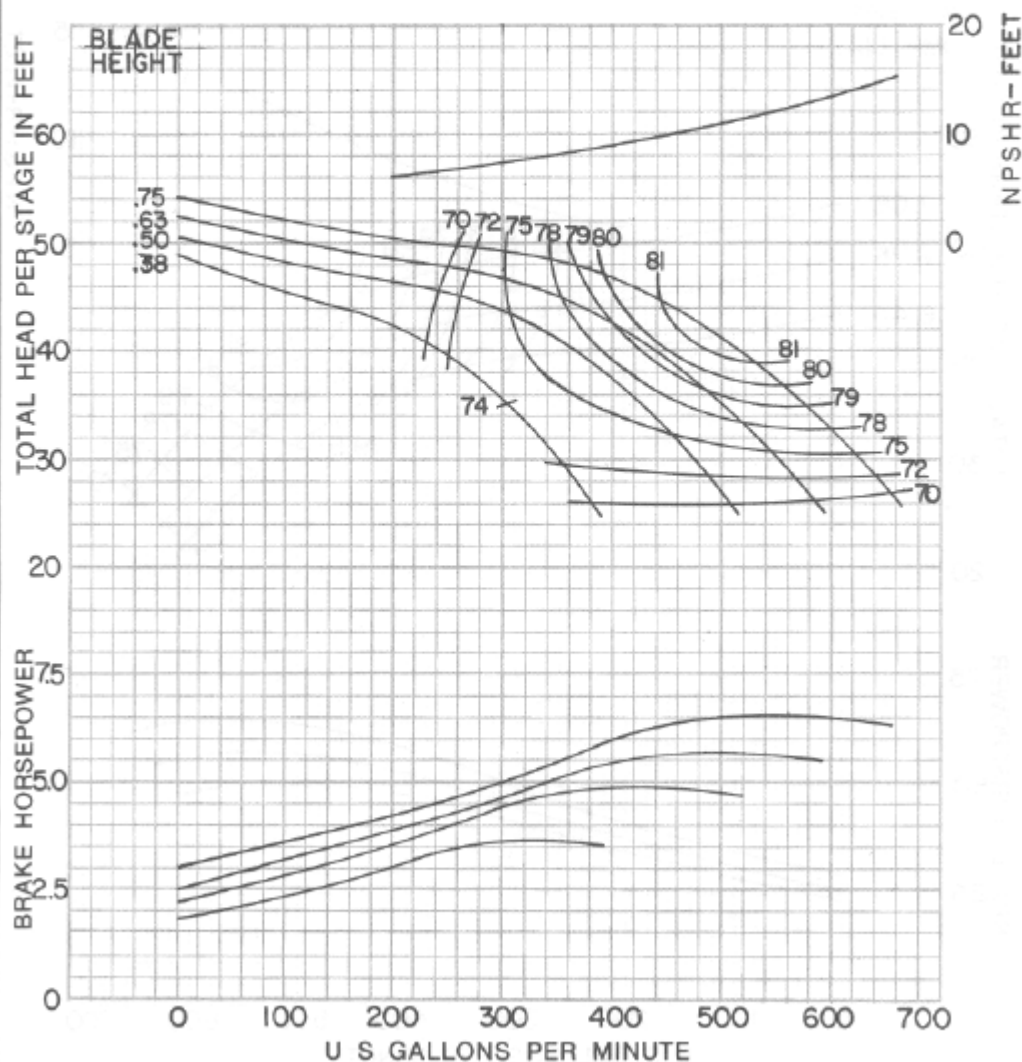

SEMI-OPEN IMPELLER
THRUST FACTOR 7.7

CURVE NO. AEC-1342
DATE 6-20-83