



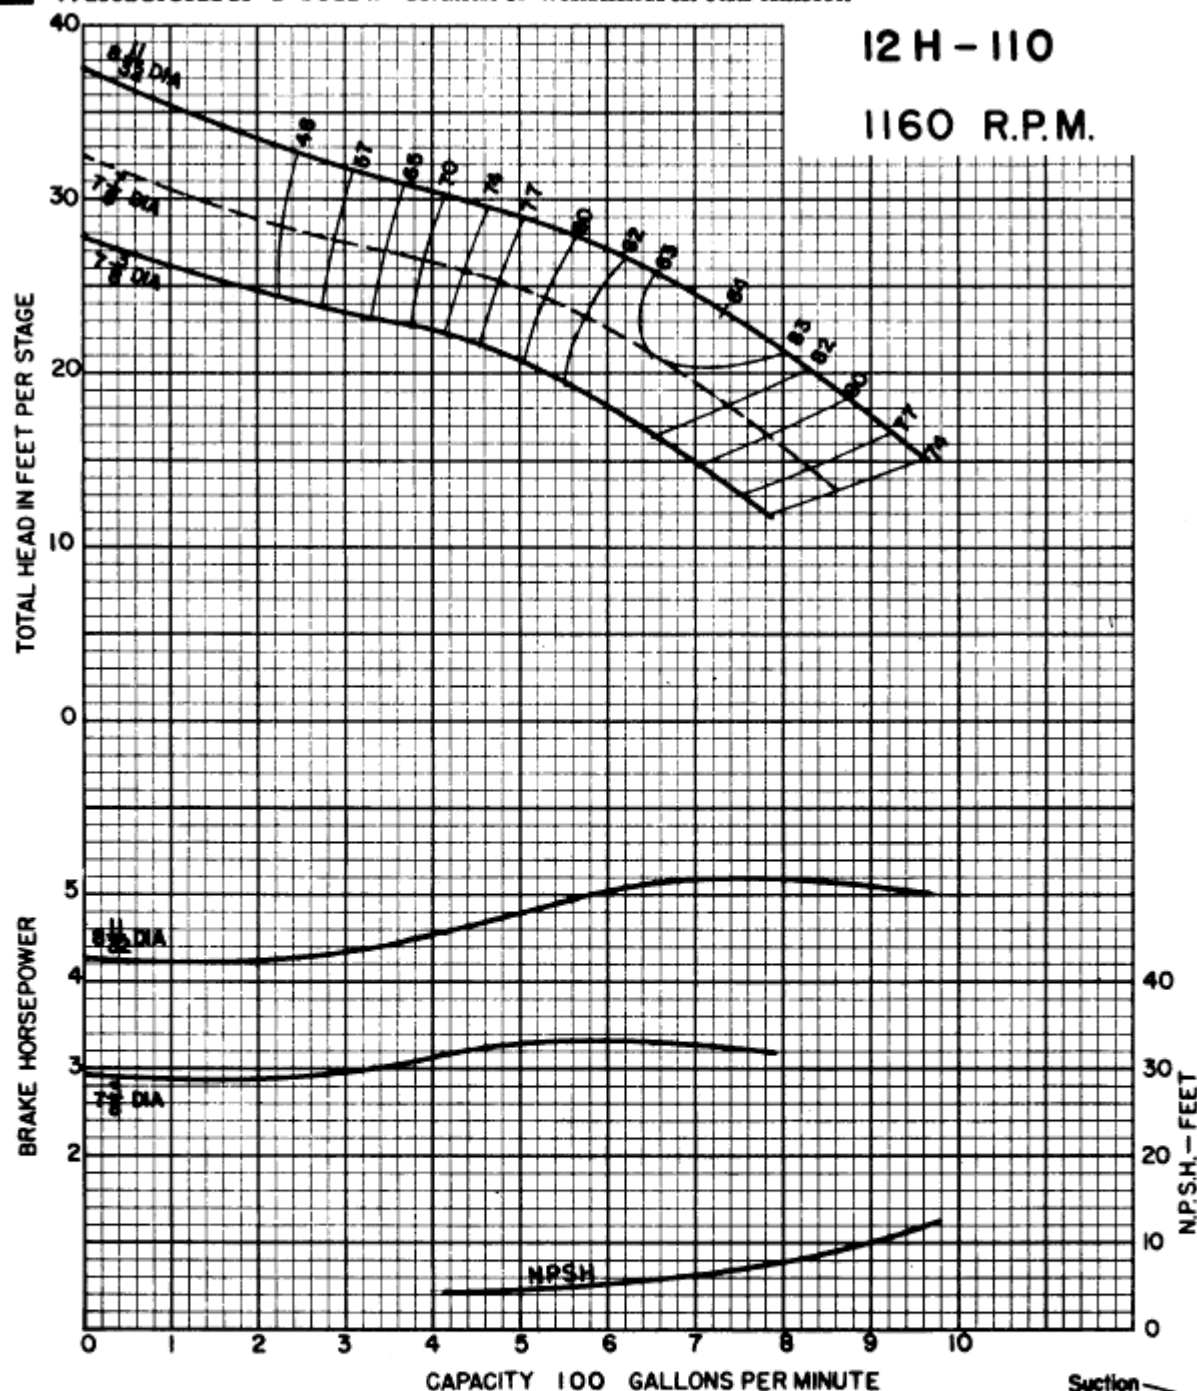

Efficiency shown is for 4 stages or more, with standard materials. For fewer stages or other materials change efficiency as shown.

No. of stages	Eff. change	MATERIAL	Standard materials
6	—	Impeller—bronze	Impeller—bronze
5	—	Impeller—c.i.	Bowl—cast iron/enamelled
4	—	Impeller—c.i.enm.	Thrust factor
3	—1	Bowl—c.i.enm.	Rotor wt. per stage (lbs.)
2	—2	Bowl—cast iron	Bowl wt. 1st stage (lbs.)
1	—4	Bowl—bronze	Bowl wt. add'l. stage (lbs.)
			Max. bowl horsepower
			Impeller eye area (sq. in.)

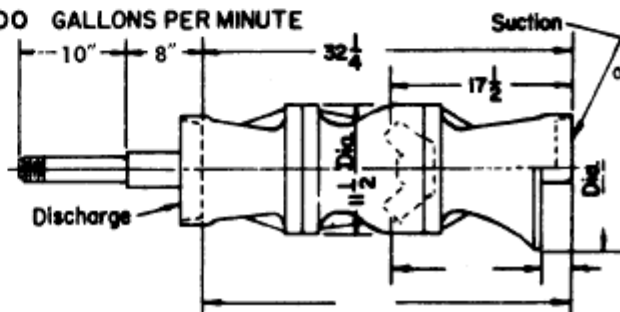

For additional stages add $10 \frac{1}{2}$ " per stage.

Column pipe	8	10
Suction pipe	10	
Impeller shaft diameter	1.75	

ALH - 8009