



15H-277
1160 R.P.M.

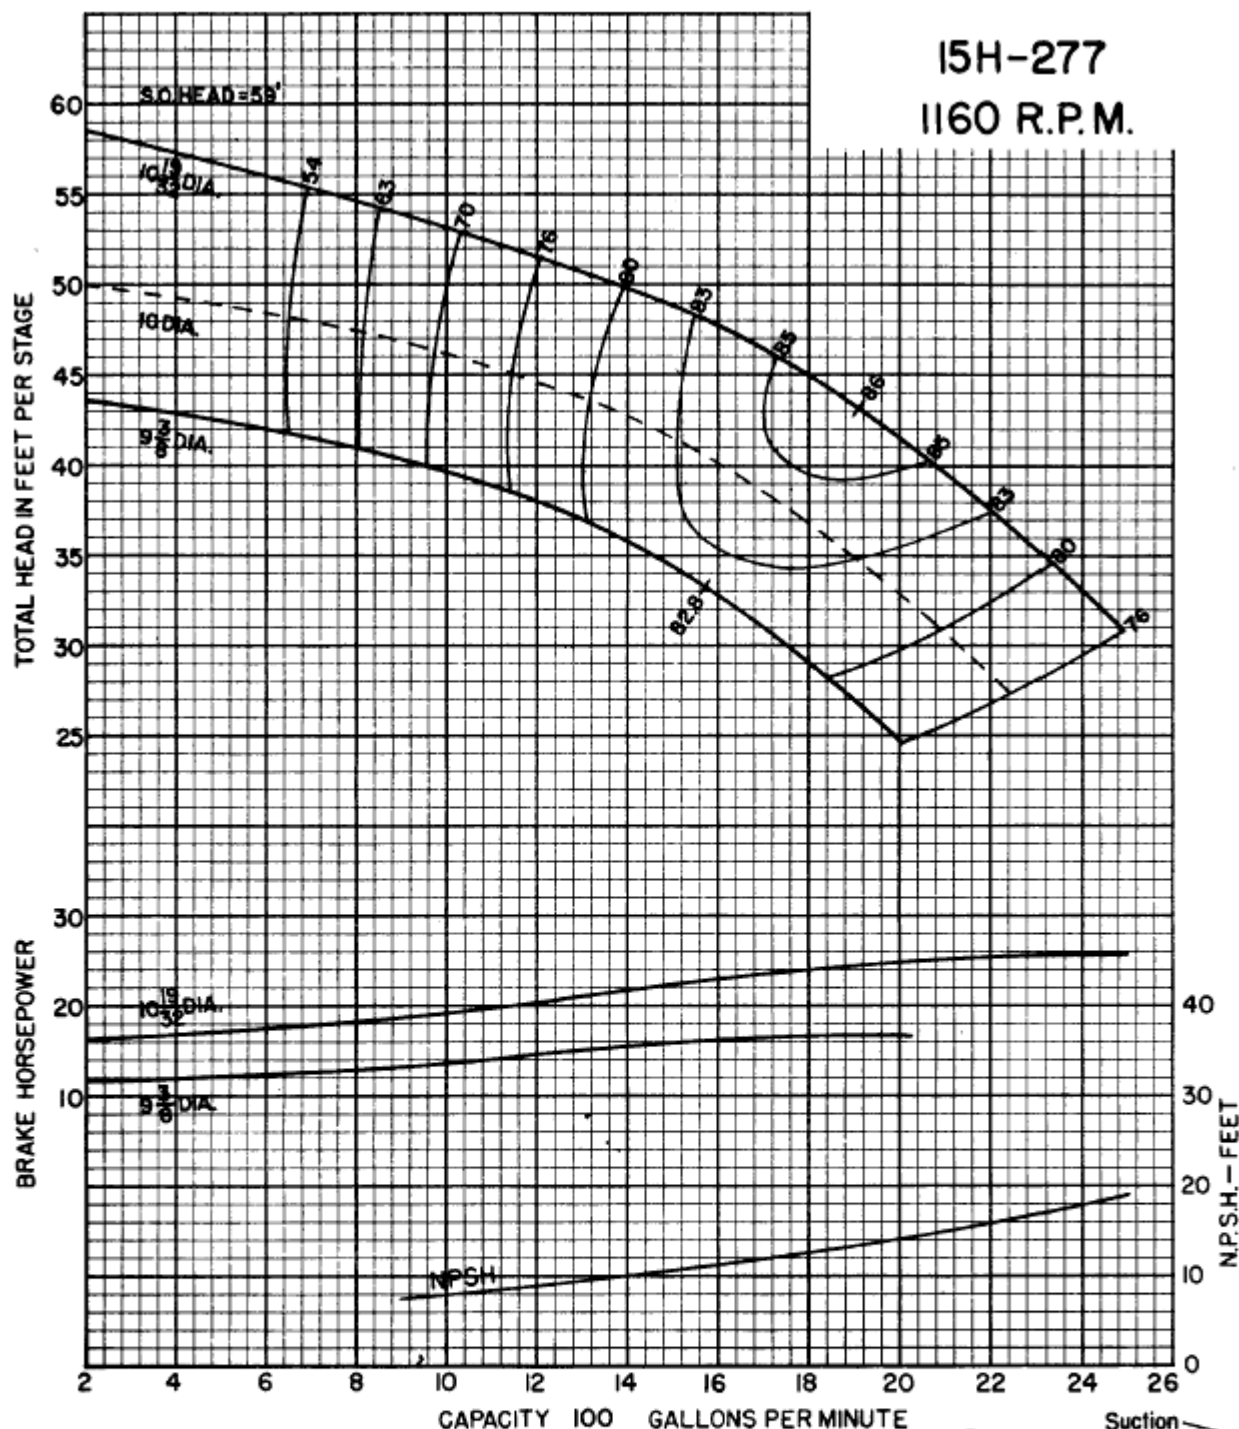

Efficiency shown is for 4 stages or more, with standard materials. For fewer stages or other materials change efficiency as shown.

No. of stages	Eff. change	MATERIAL	Eff. change	Standard materials
				Impeller — bronze
				Bowl — cast iron / enamelled
6	—	Impeller — bronze		Thrust factor
5	—	Impeller — c.i.		Rotor wt. per stage (lbs.)
4	—	Impeller — c.i. enm.		Bowl wt. 1st stage (lbs.)
3	-1.5	Bowl — c.i. enm.		Bowl wt. add'l. stage (lbs.)
2	-2	Bowl — cast iron		Max. bowl horsepower
1	-6	Bowl — bronze		Impeller eye area (sq. in.)

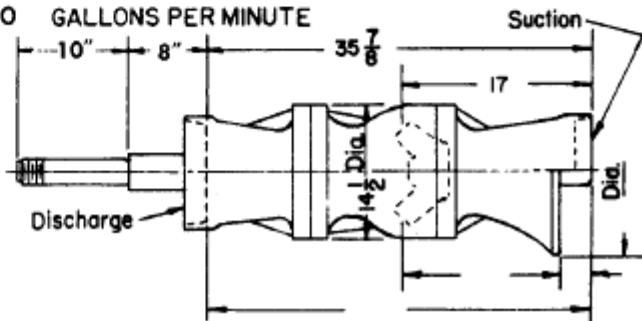

For additional stages add $13\frac{3}{8}$ per stage.

Column pipe	12	10
Suction pipe	12	
Impeller shaft diameter	2.25	

ALH - 8029