
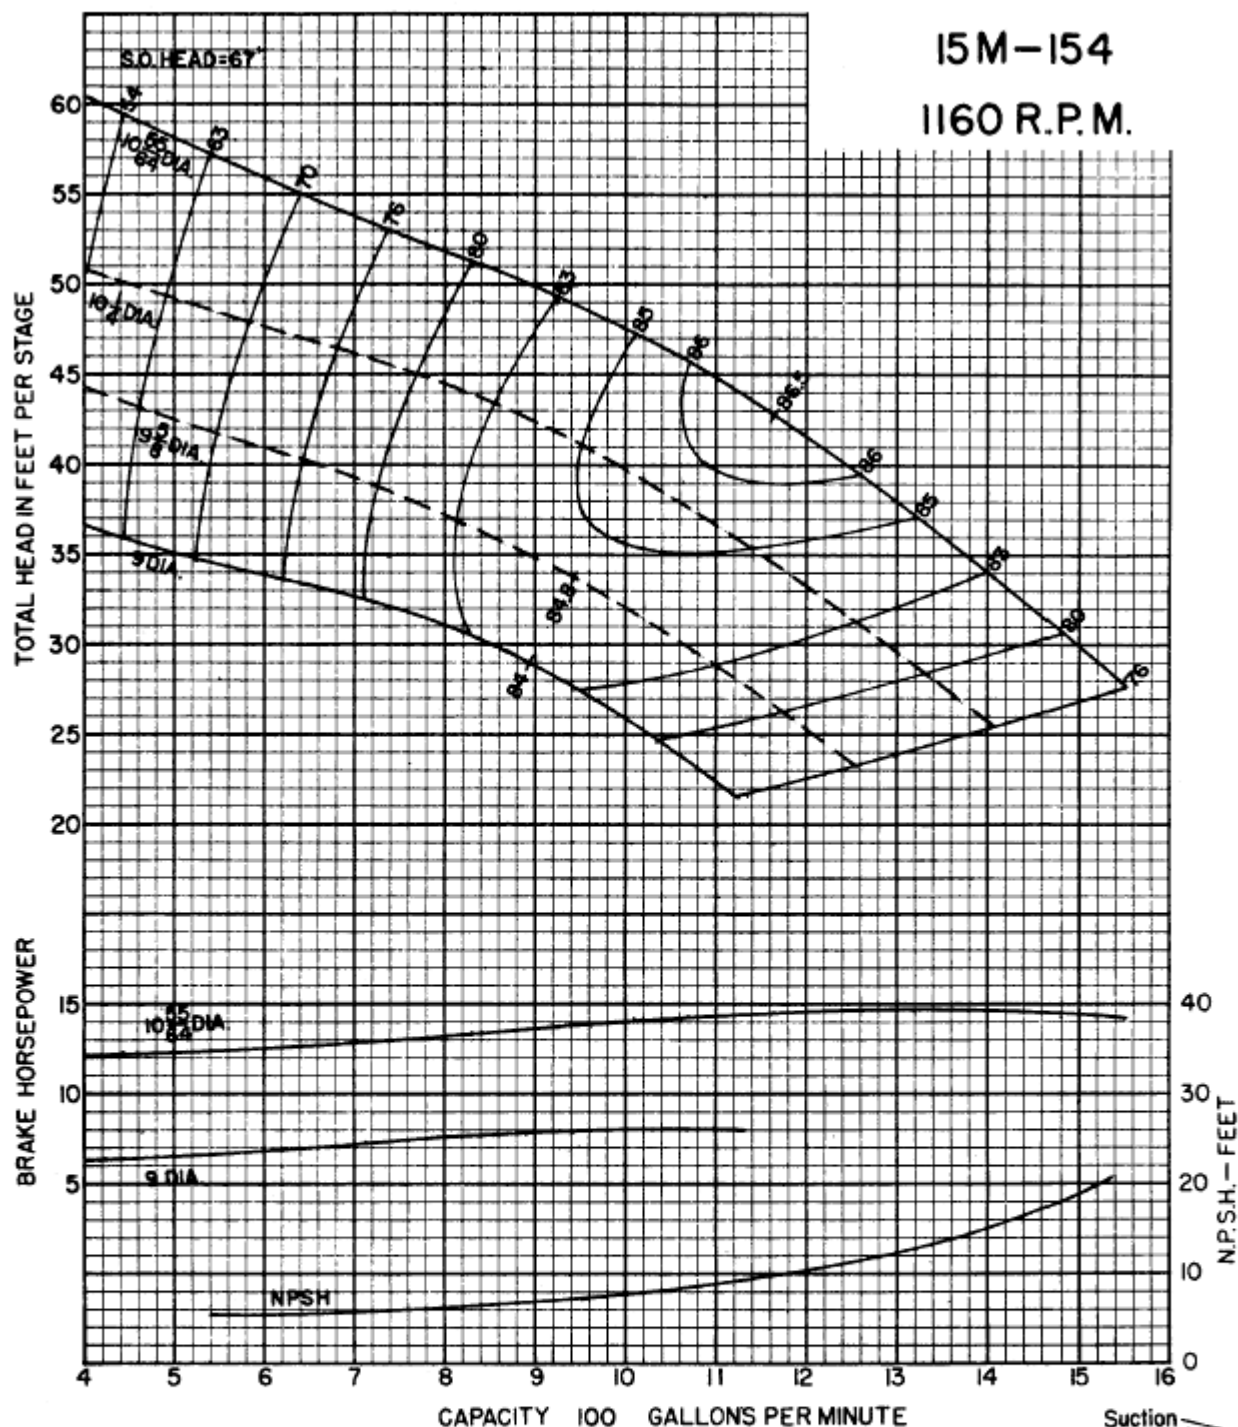



15M-154
1160 R.P.M.


Efficiency shown is for 4 stages or more, with standard materials. For fewer stages or other materials change efficiency as shown.

No. of stages	Eff. change	MATERIAL	Eff. change	Standard materials
6	-	Impeller—bronze		Impeller—bronze
5	-	Impeller—c.i.		Bowl—cast iron/enamelled
4	-	Impeller—c.i.enm.		Thrust factor
3	-0.5	Bowl—c.i.enm.		Rotor wt. per stage (lbs.)
2	-2.0	Bowl—cast iron		Bowl wt. 1st stage (lbs.)
1	-5.0	Bowl—bronze		Bowl wt. add'l. stage (lbs.)
				Max. bowl horsepower
				Impeller eye area (sq.in.)

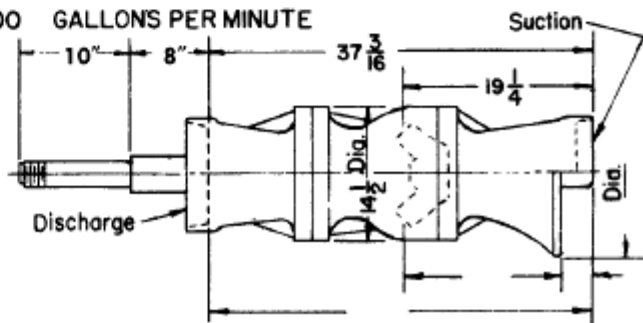

For additional stages add 12 $\frac{3}{4}$ " per stage.

Column pipe	10	8
Suction pipe	10	
Impeller shaft diameter	2.25	

ALH-8025