



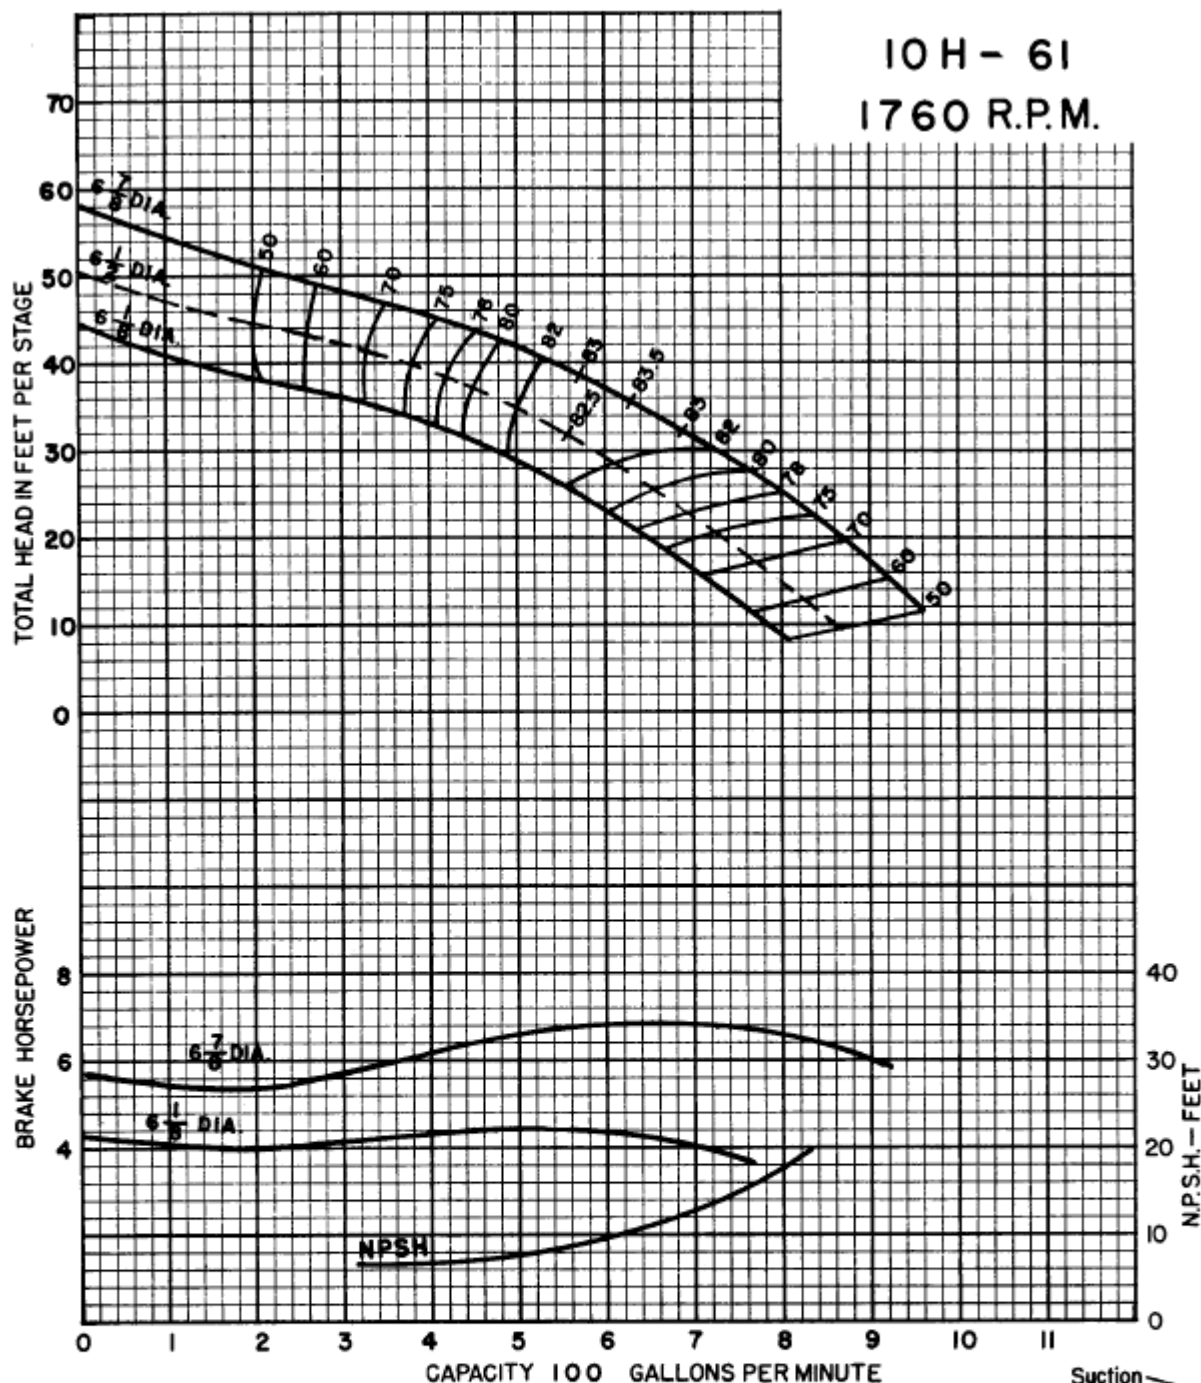

Efficiency shown is for 4 stages or more, with standard materials. For fewer stages or other materials change efficiency as shown.

No. of stages	Eff. change	MATERIAL	Eff. change	Standard materials	
				Impeller—bronze	
6	—	Impeller—bronze		Bowl—cast iron/enamelled	
5	—	Impeller—c.i.		Thrust factor	7
4	—	Impeller—c.i.enm.		Rotor wt. per stage (lbs.)	16
3	-1	Bowl—c.i.enm.		Bowl wt. 1st stage (lbs.)	165
2	-2	Bowl—cast iron		Bowl wt. add'l. stage (lbs.)	58
1	-4	Bowl—bronze		Max. bowl horsepower	140
				Impeller eye area (sq.in.)	14.2

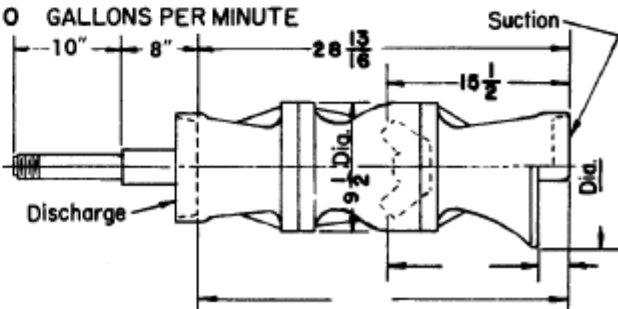

For additional stages add $8\frac{5}{8}$ per stage.

Column pipe	6 5/8
Suction pipe	6
Impeller shaft diameter	1.5

ALH-8055